




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/26, 7/36		A2	(11) International Publication Number: WO 97/13372
			(43) International Publication Date: 10 April 1997 (10.04.97)
(21) International Application Number: PCT/US96/15892 (22) International Filing Date: 4 October 1996 (04.10.96) (30) Priority Data: 60/005,031 5 October 1995 (05.10.95) US (71) Applicant: MICROSOFT CORPORATION [US/US]; One Microsoft Way, Redmond, WA 98052 (US). (72) Inventors: LEE, Ming-Chieh; 5588 166th Place S.E., Bellevue, WA 98006 (US). CHEN, Wei-ge; 2900 First Avenue S-509, Seattle, WA 98121 (US). (74) Agent: MEININGER, Mark, M.; Klarquist, Sparkman, Campbell, Leigh & Winston, One World Trade Center, Suite 1600, 121 S.W. Salmon Street, Portland, OR 97204 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: FEATURE-BASED VIDEO COMPRESSION METHOD

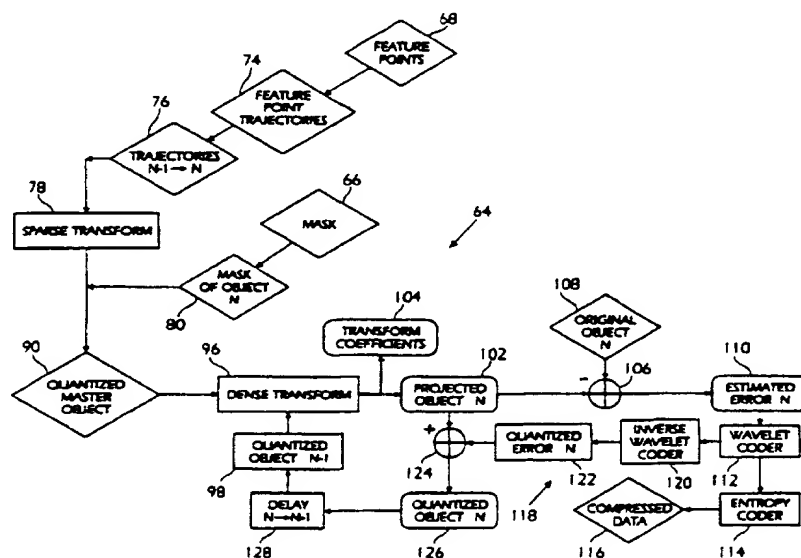

(57) Abstract

Video encoding and decoding processes provide compression and decompression of digitized video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object- or feature- based video compression to improve the accuracy and versatility of encoding interframe motion and interframe image features. Video information is compressed relative to objects or features of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. The decoder process decompresses the encoded video information to reconstruct the objects or features of arbitrary configurations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

FEATURE-BASED VIDEO COMPRESSION METHOD

FIELD OF THE INVENTION

The present invention relates to processes for compressing digital video
5 signals and, in particular, to an object-based digital video encoding process with
error feedback to increase accuracy.

BACKGROUND OF THE INVENTION

Full-motion video displays based upon analog video signals have long been
10 available in the form of television. With recent increases in computer processing
capabilities and affordability, full-motion video displays based upon digital video
signals are becoming more widely available. Digital video systems can provide
significant improvements over conventional analog video systems in creating,
modifying, transmitting, storing, and playing full-motion video sequences.

15 Digital video displays include large numbers of image frames that are played
or rendered successively at frequencies of between 30 and 75 Hz. Each image frame
is a still image formed from an array of pixels according to the display resolution of
a particular system. As examples, VHS-based systems have display resolutions of
320x480 pixels, NTSC-based systems have display resolutions of 720x486 pixels,
20 and high-definition television (HDTV) systems under development have display
resolutions of 1360x1024 pixels.

The amounts of raw digital information included in video sequences are
massive. Storage and transmission of these amounts of video information is
infeasible with conventional personal computer equipment. With reference to a
25 digitized form of a relatively low resolution VHS image format having a 320x480
pixel resolution, a full-length motion picture of two hours in duration could
correspond to 100 gigabytes of digital video information. By comparison,
conventional compact optical disks have capacities of about 0.6 gigabytes, magnetic
hard disks have capacities of 1-2 gigabytes, and compact optical disks under
30 development have capacities of up to 8 gigabytes.

In response to the limitations in storing or transmitting such massive amounts

of digital video information, various video compression standards or processes have been established, including MPEG-1, MPEG-2, and H.26X. These conventional video compression techniques utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression
5 in which pixel-based representations of image frames are converted to motion representations. In addition, the conventional video compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed. Intraframe compression is based upon conventional
10 processes for compressing still images, such as discrete cosine transform (DCT) encoding.

Although differing in specific implementations, the MPEG-1, MPEG-2, and H.26X video compression standards are similar in a number of respects. The following description of the MPEG-2 video compression standard is generally
15 applicable to the others.

MPEG-2 provides interframe compression and intraframe compression based upon square blocks or arrays of pixels in video images. A video image is divided into transformation blocks having dimensions of 16x16 pixels. For each transformation block T_N in an image frame N , a search is performed across the
20 image of an immediately preceding image frame $N-1$ or also a next successive video frame $N+1$ (i.e., bidirectionally) to identify the most similar respective transformation blocks T_{N+1} or T_{N-1} .

Ideally, and with reference to a search of the next successive image frame, the pixels in transformation blocks T_N and T_{N-1} are identical, even if the
25 transformation blocks have different positions in their respective image frames. Under these circumstances, the pixel information in transformation block T_{N-1} is redundant to that in transformation block T_N . Compression is achieved by substituting the positional translation between transformation blocks T_N and T_{N-1} for the pixel information in transformation block T_{N-1} . In this simplified example, a
30 single translational vector $(\Delta X, \Delta Y)$ is designated for the video information associated with the 256 pixels in transformation block T_{N-1} .

Frequently, the video information (i.e., pixels) in the corresponding transformation blocks T_N and T_{N+1} are not identical. The difference between them is designated a transformation block error E , which often is significant. Although it is compressed by a conventional compression process such as discrete cosine transform (DCT) encoding, the transformation block error E is cumbersome and limits the extent (ratio) and the accuracy by which video signals can be compressed.

Large transformation block errors E arise in block-based video compression methods for several reasons. The block-based motion estimation represents only translational motion between successive image frames. The only change between corresponding transformation blocks T_N and T_{N+1} that can be represented are changes in the relative positions of the transformation blocks. A disadvantage of such representations is that full-motion video sequences frequently include complex motions other than translation, such as rotation, magnification and shear. Representing such complex motions with simple translational approximations results in the significant errors.

Another aspect of video displays is that they typically include multiple image features or objects that change or move relative to each other. Objects may be distinct characters, articles, or scenery within a video display. With respect to a scene in a motion picture, for example, each of the characters (i.e., actors) and articles (i.e., props) in the scene could be a different object.

The relative motion between objects in a video sequence is another source of significant transformation block errors E in conventional video compression processes. Due to the regular configuration and size of the transformation blocks, many of them encompass portions of different objects. Relative motion between the objects during successive image frames can result in extremely low correlation (i.e., high transformation errors E) between corresponding transformation blocks. Similarly, the appearance of portions of objects in successive image frames (e.g., when a character turns) also introduces high transformation errors E .

Conventional video compression methods appear to be inherently limited due to the size of transformation errors E . With the increased demand for digital video display capabilities, improved digital video compression processes are required.

SUMMARY OF THE INVENTION

The present invention includes a video compression encoder process for compressing digitized video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object-based video
5 compression to improve the accuracy and versatility of encoding interframe motion and intraframe image features. Video information is compressed relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. As another benefit,
10 object-based video compression of this invention provides interactive video editing capabilities for processing compressed video information.

In a preferred embodiment, the process or method of this invention includes identifying image features of arbitrary configuration in a first video image frame and defining within the image feature multiple distinct feature points. The feature points
15 of the image feature in the first video image frame are correlated with corresponding feature points of the image feature in a succeeding second video image frame, thereby to determine an estimation of the image feature in the second video image frame. A difference between the estimated and actual image feature in the second video image frame is determined and encoded in a compressed format.

20 The encoder process of this invention overcomes the shortcomings of the conventional block-based video compression methods. The encoder process preferably uses a multi-dimensional transformation method to represent mappings between corresponding objects in successive image frames. The multiple dimensions of the transformation refer to the number of coordinates in its generalized form.
25 The multi-dimensional transformation is capable of representing complex motion that includes any or all of translation, rotation, magnification, and shear. As a result, complex motion of objects between successive image frames may be represented with relatively low transformation error.

Another source of error in conventional block-based video compression
30 methods is motion between objects included within a transformation block. The object-based video compression or encoding of this invention substantially eliminates

the relative motion between objects within transformation blocks. As a result, transformation error arising from inter-object motion also is substantially decreased. The low transformation errors arising from the encoder process of this invention allow it to provide compression ratios up to 300% greater than those obtainable from prior encoder processes such as MPEG-2.

The foregoing and other features and advantages of the preferred embodiment of the present invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a computer system that may be used to implement a method and apparatus embodying the invention.

Figs. 2A and 2B are simplified representations of a display screen of a video display device showing two successive image frames corresponding to a video signal.

Fig. 3A is a generalized functional block diagram of a video compression encoder process for compressing digitized video signals representing display motion in video sequences of multiple image frames. Fig. 3B is a functional block diagram of a master object encoder process according to this invention.

Fig. 4 is a functional block diagram of an object segmentation process for segmenting selected objects from an image frame of a video sequence.

Fig. 5A is simplified representation of display screen of the video display device of Fig. 2A, and Fig. 5B is an enlarged representation of a portion of the display screen of Fig. 5A.

Fig. 6 is a functional block diagram of a polygon match process for determining a motion vector for corresponding pairs of pixels in corresponding objects in successive image frames.

Figs. 7A and 7B are simplified representations of a display screen showing two successive image frames with two corresponding objects.

Fig. 8 is a functional block diagram of an alternative pixel block correlation process.

Fig. 9A is a schematic representation of a first pixel block used for identifying corresponding pixels in different image frames. Fig. 9B is a schematic representation of an array of pixels corresponding to a search area in a prior image frame where corresponding pixels are sought. Figs. 9C-9G are schematic representations of the first pixel block being scanned across the pixel array of FIG. 9B to identify corresponding pixels.

Fig. 10A is a schematic representation of a second pixel block used for identifying corresponding pixels in different image frames. Figs. 10B-10F are schematic representations of the second pixel block being scanned across the pixel array of FIG. 9B to identify corresponding pixels.

Fig. 11A is a schematic representation of a third pixel block used for identifying corresponding pixels in different image frames. Figs. 11B-11F are schematic representations of the third pixel block being scanned across the pixel array of Fig. 9B.

Fig. 12 is a function block diagram of a multi-dimensional transformation method that includes generating a mapping between objects in first and second successive image frames and quantizing the mapping for transmission or storage.

Fig. 13 is a simplified representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the multi-dimensional transformation method of Fig. 12.

Fig. 14 is an enlarged simplified representation showing three selected pixels of a transformation block used in the quantization of affine transformation coefficients determined by the method of Fig. 12.

Fig. 15 is a functional block diagram of a transformation block optimization method utilized in an alternative embodiment of the multi-dimensional transformation method of Fig. 12.

Fig. 16 is a simplified fragmentary representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the transformation block optimization method of Fig. 15.

Figs. 17A and 17B are a functional block diagram of a precompression extrapolation method for extrapolating image features of arbitrary configuration to a

predefined configuration to facilitate compression.

Figs. 18A-18D are representations of a display screen on which a simple object is rendered to show various aspects of the extrapolation method of Fig. 14.

5 Figs. 19A and 19B are functional block diagrams of an encoder method and a decoder method, respectively, employing a Laplacian pyramid encoder method in accordance with this invention.

Figs. 20A-20D are simplified representations of the color component values of an arbitrary set or array of pixels processed according to the encoder process of Fig. 19A.

10 Fig. 21 is a functional block diagram of a motion vector encoding process according to this invention.

Fig. 22 is a functional block diagram of an alternative quantized object encoder-decoder process.

15 Fig. 23A is a generalized functional block diagram of a video compression decoder process matched to the encoder process of Fig. 3. Fig. 23B is a functional diagram of a master object decoder process according to this invention.

Fig. 24A is a diagrammatic representation of a conventional chain code format. Fig. 24B is a simplified representation of an exemplary contour for processing with the chain code format of Fig. 24A.

20 Fig. 25A is a functional block diagram of a chain coding process of this invention.

Fig. 25B is a diagrammatic representation of a chain code format of the present invention.

25 Fig. 25C is a diagrammatic representation of special case chain code modifications used in the process of Fig. 25A.

Fig. 26 is a functional block diagram of a sprite generating or encoding process.

30 Figs. 27A and 27B are respective first and second objects defined by bitmaps and showing grids of triangles superimposed over the objects in accordance with the process of Fig. 26.

Fig. 28 is a functional block diagram of a sprite decoding process

corresponding to the encoding process of Fig. 26.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to Fig. 1, an operating environment for the preferred embodiment
5 of the present invention is a computer system 20, either of a general purpose or a dedicated type, that comprises at least one high speed central processing unit (CPU) 22, in conjunction with a memory system 24, an input device 26, and an output device 28. These elements are interconnected by a bus structure 30.

The illustrated CPU 22 is of familiar design and includes an ALU 32 for
10 performing computations, a collection of registers 34 for temporary storage of data and instructions, and a control unit 36 for controlling operation of the system 20. CPU 22 may be a processor having any of a variety of architectures including Alpha from Digital, MIPS from MIPS Technology, NEC, IDT, Siemens, and others, x86 from Intel and others, including Cyrix, AMD, and Nexgen, and the PowerPc from
15 IBM and Motorola.

The memory system 24 includes main memory 38 and secondary storage 40. Illustrated main memory 38 takes the form of 16 megabytes of semiconductor RAM memory. Secondary storage 40 takes the form of long term storage, such as ROM, optical or magnetic disks, flash memory, or tape. Those skilled in the art will
20 appreciate that memory system 24 may comprise many other alternative components.

The input and output devices 26, 28 are also familiar. The input device 26 can comprise a keyboard, a mouse, a physical transducer (e.g., a microphone), etc. The output device 28 can comprise a display, a printer, a transducer (e.g. a speaker), etc. Some devices, such as a network interface or a modem, can be used as input
25 and/or output devices.

As is familiar to those skilled in the art, the computer system 20 further includes an operating system and at least one application program. The operating system is the set of software which controls the computer system's operation and the allocation of resources. The application program is the set of software that performs
30 a task desired by the user, making use of computer resources made available through the operating system. Both are resident in the illustrated memory system 24.

In accordance with the practices of persons skilled in the art of computer programming, the present invention is described below with reference to symbolic representations of operations that are performed by computer system 20, unless indicated otherwise. Such operations are sometimes referred to as being
5 computer-executed. It will be appreciated that the operations which are symbolically represented include the manipulation by CPU 22 of electrical signals representing data bits and the maintenance of data bits at memory locations in memory system 24, as well as other processing of signals. The memory locations where data bits are maintained are physical locations that have particular electrical, magnetic, or optical
10 properties corresponding to the data bits.

Figs. 2A and 2B are simplified representations of a display screen 50 of a video display device 52 (e.g., a television or a computer monitor) showing two successive image frames 54a and 54b of a video image sequence represented electronically by a corresponding video signal. Video signals may be in any of a
15 variety of video signal formats including analog television video formats such as NTSC, PAL, and SECAM, and pixelated or digitized video signal formats typically used in computer displays, such as VGA, CGA, and EGA. Preferably, the video signals corresponding to image frames are of a digitized video signal format, either as originally generated or by conversion from an analog video signal format, as is
20 known in the art.

Image frames 54a and 54b each include a rectangular solid image feature 56 and a pyramid image feature 58 that are positioned over a background 60. Image features 56 and 58 in image frames 54a and 54b have different appearances because different parts are obscured and shown. For purposes of the following description,
25 the particular form of an image feature in an image frame is referred to as an object or, alternatively, a mask. Accordingly, rectangular solid image feature 56 is shown as rectangular solid objects 56a and 56b in respective image frames 54a and 54b, and pyramid image feature 58 is shown as pyramid objects 58a and 58b in respective image frames 54a and 54b.

30 Pyramid image feature 58 is shown with the same position and orientation in image frames 54a and 54b and would "appear" to be motionless when shown in the

video sequence. Rectangular solid 56 is shown in frames 54a and 54b with a different orientation and position relative to pyramid 58 and would "appear" to be moving and rotating relative to pyramid 58 when shown in the video sequence. These appearances of image features 58 and 60 are figurative and exaggerated. The
5 image frames of a video sequence typically are displayed at rates in the range of 30-80 Hz. Human perception of video motion typically requires more than two image frames. Image frames 54a and 54b provide, therefore, a simplified representation of a conventional video sequence for purposes of illustrating the present invention. Moreover, it will be appreciated that the present invention is in no way limited to
10 such simplified video images, image features, or sequences and, to the contrary, is applicable to video images and sequences of arbitrary complexity.

VIDEO COMPRESSION ENCODER PROCESS OVERVIEW

Fig. 3A is a generalized functional block diagram of a video compression
15 encoder process 64 for compressing digitized video signals representing display motion in video sequences of multiple image frames. Compression of video information (i.e., video sequences or signals) can provide economical storage and transmission of digital video information in applications that include, for example, interactive or digital television and multimedia computer applications. For purposes
20 of brevity, the reference numerals assigned to function blocks of encoder process 64 are used interchangeably in reference to the results generated by the function blocks.

Conventional video compression techniques utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression in which pixel-based representations of image frames are
25 converted to motion representations. In addition, conventional video compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed.

In such conventional video compression techniques, including MPEG-1,
30 MPEG-2, and H.26X, the temporal and spatial correlations are determined relative to simple translations of fixed, regular (e.g., square) arrays of pixels. Video

information commonly includes, however, arbitrary video motion that cannot be represented accurately by translating square arrays of pixels. As a consequence, conventional video compression techniques typically include significant error components that limit the compression rate and accuracy.

5 In contrast, encoder process 64 utilizes object-based video compression to improve the accuracy and versatility of encoding interframe motion and intraframe image features. Encoder process 64 compresses video information relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels. This reduces the error components and thereby improves the compression efficiency and accuracy.
10 As another benefit, object-based video compression provides interactive video editing capabilities for processing compressed video information.

Referring to Fig. 3A, function block 66 indicates that user-defined objects within image frames of a video sequence are segmented from other objects within the image frames. The objects may be of arbitrary configuration and preferably
15 represent distinct image features in a display image. Segmentation includes identifying the pixels in the image frames corresponding to the objects. The user-defined objects are defined in each of the image frames in the video sequence. In Figs. 2A and 2B, for example, rectangular solid objects 56a and 56b and pyramid objects 58a and 58b are separately segmented.

20 The segmented objects are represented by binary or multi-bit (e.g., 8-bit) "alphachannel" masks of the objects. The object masks indicate the size, configuration, and position of an object on a pixel-by-pixel basis. For purposes of simplicity, the following description is directed to binary masks in which each pixel of the object is represented by a single binary bit rather than the typical 24-bits (i.e.,
25 8 bits for each of three color component values). Multi-bit (e.g., 8-bit) masks also have been used.

Function block 68 indicates that "feature points" of each object are defined by a user. Feature points preferably are distinctive features or aspects of the object. For example, corners 70a-70c and corners 72a-72c could be defined by a user as
30 feature points of rectangular solid 56 and pyramid 58, respectively. The pixels corresponding to each object mask and its feature points in each image frame are

stored in an object database included in memory system 24.

Function block 74 indicates that changes in the positions of feature points in successive image frames are identified and trajectories determined for the feature points between successive image frames. The trajectories represent the direction and extent of movement of the feature points. Function block 76 indicates that
5 trajectories of the feature points in the object between prior frame N-1 and current frame N also is retrieved from the object data base.

Function block 78 indicates that a sparse motion transformation is determined for the object between prior frame N-1 and current frame N. The sparse motion
10 transformation is based upon the feature point trajectories between frames N-1 and N. The sparse motion transformation provides an approximation of the change of the object between prior frame N-1 and current frame N.

Function block 80 indicates that a mask of an object in a current frame N is retrieved from the object data base in memory system 24.

15 Function block 90 indicates that a quantized master object or "sprite" is formed from the objects or masks 66 corresponding to an image feature in an image frame sequence and feature point trajectories 74. The master object preferably includes all of the aspects or features of an object as it is represented in multiple frames. With reference to Figs. 2A and 2B, for example, rectangular solid 56 in
20 frame 54b includes a side 78b not shown in frame 54a. Similarly, rectangular solid 56 includes a side 78a in frame 54a not shown in frame 54b. The master object for rectangular solid 56 includes both sides 78a and 78b.

Sparse motion transformation 78 frequently will not provide a complete representation of the change in the object between frames N-1 and N. For example,
25 an object in a prior frame N-1, such as rectangular object 54a, might not include all the features of the object in the current frame N, such as side 78b of rectangular object 54b.

To improve the accuracy of the transformation, therefore, an intersection of the masks of the object in prior frame N-1 and current frame N is determined, such
30 as by a logical AND function as is known in the art. The mask of the object in the current frame N is subtracted from the resulting intersection to identify any portions

or features of the object in the current frame N not included in the object in the prior frame N-1 (e.g., side 78b of rectangular object 54b, as described above). The newly identified portions of the object are incorporated into master object 90 so that it includes a complete representation of the object in frames N-1 and N.

5 Function block 96 indicates that a quantized form of an object 98 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) is transformed by a dense motion transformation to provide a predicted form of the object 102 in a current frame N (e.g., rectangular solid object 56b in image frame 54b). This transformation provides object-based interframe compression.

10 The dense motion transformation preferably includes determining an affine transformation between quantized prior object 98 in frame N-1 and the object in the current frame N and applying the affine transformation to quantized prior object 98. The preferred affine transformation is represented by affine transformation coefficients 104 and is capable of describing translation, rotation, magnification, and
15 shear. The affine transformation is determined from a dense motion estimation, preferably including a pixel-by-pixel mapping, between prior quantized object 98 and the object in the current frame N.

 Predicted current object 102 is represented by quantized prior object 98, as modified by dense motion transformation 96, and is capable of representing
20 relatively complex motion, together with any new image aspects obtained from master object 90. Such object-based representations are relatively accurate because the perceptual and spatial continuity associated with objects eliminates errors arising from the typically changing relationships between different objects in different image frames. Moreover, the object-based representations allow a user to represent
25 different objects with different levels of resolution to optimize the relative efficiency and accuracy for representing objects of varying complexity.

 Function block 106 indicates that for image frame N, predicted current object 102 is subtracted from original object 108 for current frame N to determine an estimated error 110 in predicted object 102. Estimated error 110 is a compressed
30 representation of current object 108 in image frame N relative to quantized prior object 98. More specifically, current object 108 may be decoded or reconstructed

from estimated error 110 and quantized prior object 98.

Function block 112 indicates that estimated error 110 is compressed or "coded" by a conventional "lossy" still image compression method such as lattice subband or other wavelet compression or encoding as described in Multirate Systems and Filter Banks by Vaidyanathan, PTR Prentice-Hall, Inc., Englewood Cliffs, New Jersey, (1993) or discrete cosine transform (DCT) encoding as described in JPEG: Still Image Data Compression Standard by Pennebaker et al., Van Nostrand Reinhold, New York (1993).

As is known in the art, "lossy" compression methods introduce some data distortion to provide increased data compression. The data distortion refers to variations between the original data before compression and the data resulting after compression and decompression. For purposes of illustration below, the compression or encoding of function block 102 is presumed to be wavelet encoding.

Function block 114 indicates that the wavelet encoded estimated error from function block 112 is further compressed or "coded" by a conventional "lossless" still image compression method to form compressed data 116. A preferred conventional "lossless" still image compression method is entropy encoding as described in JPEG: Still Image Data Compression Standard by Pennebaker et al. As is known in the art, "lossless" compression methods introduce no data distortion.

An error feedback loop 118 utilizes the wavelet encoded estimated error from function block 112 for the object in frame N to obtain a prior quantized object for succeeding frame N+1. As an initial step in feedback loop 118, function block 120 indicates that the wavelet encoded estimated error from function block 112 is inverse wavelet coded, or wavelet decoded, to form a quantized error 122 for the object in image frame N.

The effect of successively encoding and decoding estimated error 110 by a lossy still image compression method is to omit from quantized error 122 video information that is generally imperceptible by viewers. This information typically is of higher frequencies. As a result, omitting such higher frequency components typically can provide image compression of up to about 200% with only minimal degradation of image quality.

Function block 124 indicates that quantized error 122 and predicted object 102, both for image frame N, are added together to form a quantized object 126 for image frame N. After a timing coordination delay 128, quantized object 126 becomes quantized prior object 98 and is used as the basis for processing the
5 corresponding object in image frame N+1.

Encoder process 64 utilizes the temporal correlation of corresponding objects in successive image frames to obtain improved interframe compression, and also utilizes the spatial correlation within objects to obtain accurate and efficient
10 intraframe compression. For the interframe compression, motion estimation and compensation are performed so that an object defined in one frame can be estimated in a successive frame. The motion-based estimation of the object in the successive frame requires significantly less information than a conventional block-based representation of the object. For the intraframe compression, an estimated error
15 signal for each object is compressed to utilize the spatial correlation of the object within a frame and to allow different objects to be represented at different resolutions. Feedback loop 118 allows objects in subsequent frames to be predicted from fully decompressed objects, thereby preventing accumulation of estimation error.

Encoder process 64 provides as an output a compressed or encoded
20 representation of a digitized video signal representing display motion in video sequences of multiple image frames. The compressed or encoded representation includes object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116. The encoded representation may be stored or transmitted, according to the particular application in which the video information is
25 used.

Fig. 3B is a functional block diagram of a master object encoder process 130 for encoding or compressing master object 90. Function block 132 indicates that master object 90 is compressed or coded by a conventional "lossy" still image compression method such as lattice subband or other wavelet compression or discrete
30 cosine transform (DCT) encoding. Preferably, function block 132 employs wavelet encoding.

Function block 134 indicates that the wavelet encoded master object from function block 132 is further compressed or coded by a conventional "lossless" still image compression method to form compressed master object data 136. A preferred conventional lossless still image compression method is entropy encoding.

5 Encoder process 130 provides as an output compressed master object 136. Together with the compressed or encoded representations provided by encoder process 64, compressed master object 136 may be decompressed or decoded after storage or transmission to obtain a video sequence of multiple image frames.

Encoder process 64 is described with reference to encoding video information
10 corresponding to a single object within an image frame. As shown in Figs. 2A and 2B and indicated above, encoder process 64 is performed separately for each of the objects (e.g., objects 56 and 58 of Figs. 2A and 2B) in an image frame. Moreover, many video images include a background over which arbitrary numbers of image features or objects are rendered. Preferably, the background is processed as an
15 object according to this invention after all user-designated objects are processed.

Processing of the objects in an image frame requires that the objects be separately identified. Preferably, encoder process 64 is applied to the objects of an image frame beginning with the forward-most object or objects and proceeding successively to the back-most object (e.g., the background). The compositing of the
20 encoded objects into a video image preferably proceeds from the rear-most object (e.g., the background) and proceeds successively to the forward-most object (e.g., rectangular solid 56 in Figs. 2A and 2B). The layering of encoding objects may be communicated as distinct layering data associated with the objects of an image frame or, alternatively, by transmitting or obtaining the encoded objects in a sequence
25 corresponding to the layering or compositing sequence.

OBJECT SEGMENTATION AND TRACKING

In a preferred embodiment, the segmentation of objects within image frames referred to in function block 66 allows interactive segmentation by users. The object
30 segmentation of this invention provides improved accuracy in segmenting objects and is relatively fast and provides users with optimal flexibility in defining objects to

be segmented.

Fig. 4 is a functional block diagram of an object segmentation process 140 for segmenting selected objects from an image frame of a video sequence. Object segmentation according to process 140 provides a perceptual grouping of objects that is accurate and quick and easy for users to define.

Fig. 5A is simplified representation of display screen 50 of video display device 52 showing image frame 54a and the segmentation of rectangular solid object 56a. In its rendering on display screen 50, rectangular solid object 56a includes an object perimeter 142 (shown spaced apart from object 56a for clarity) that bounds an object interior 144. Object interior 144 refers to the outline of object 56a on display screen 50 and in general may correspond to an inner surface or, as shown, an outer surface of the image feature. Fig. 5B is an enlarged representation of a portion of display screen 50 showing the semi-automatic segmentation of rectangular solid object 56a. The following description is made with specific reference to rectangular solid object 56a, but is similarly applicable to each object to be segmented from an image frame.

Function block 146 indicates that a user forms within object interior 144 an interior outline 148 of object perimeter 142. The user preferably forms interior outline 148 with a conventional pointer or cursor control device, such as a mouse or trackball. Interior outline 148 is formed within a nominal distance 150 from object perimeter 142. Nominal distance 150 is selected by a user to be sufficiently large that the user can form interior outline 148 relatively quickly within nominal distance 150 of perimeter 142. Nominal distance 150 corresponds, for example, to between about 4 and 10 pixels.

Function block 146 is performed in connection with a key frame of a video sequence. With reference to a scene in a conventional motion picture, for example, the key frame could be the first frame of the multiple frames in a scene. The participation of the user in this function renders object segmentation process 140 semi-automatic, but significantly increases the accuracy and flexibility with which objects are segmented. Other than for the key frame, objects in subsequent image frames are segmented automatically as described below in greater detail.

Function block 152 indicates that interior outline 148 is expanded automatically to form an exterior outline 156. The formation of exterior outline 156 is performed as a relatively simple image magnification of outline 148 so that exterior outline 156 is a user-defined number of pixels from interior outline 148.

5 Preferably, the distance between interior outline 148 and exterior outline 156 is approximately twice distance 150.

Function block 158 indicates that pixels between interior outline 148 and exterior outline 156 are classified according to predefined attributes as to whether they are within object interior 144, thereby to identify automatically object perimeter

10 142 and a corresponding mask 80 of the type described with reference to Fig. 3A. Preferably, the image attributes include pixel color and position, but either attribute could be used alone or with other attributes.

In the preferred embodiment, each of the pixels in interior outline 148 and exterior outline 156 defines a "cluster center" represented as a five-dimensional

15 vector in the form of (r, g, b, x, y) . The terms $r, g,$ and b correspond to the respective red, green, and blue color components associated with each of the pixels, and the terms x and y correspond to the pixel locations. The m -number of cluster center vectors corresponding to pixels in interior outline 148 are denoted as $\{I_0, I_1, \dots, I_{m-1}\}$, and the n -number of cluster center vectors corresponding pixels in exterior

20 outline 156 are denoted as $\{O_0, O_1, \dots, O_{n-1}\}$.

Pixels between the cluster center vectors I_i and O_j are classified by identifying the vector to which each pixel is closest in the five-dimensional vector space. For each pixel, the absolute distance d_i and d_j to each of respective cluster center vectors I_i and O_j is computed according to the following equations:

25
$$d_i = w_{\text{color}}(|r - r_i| + |g - g_i| + |b - b_i|) + w_{\text{coord}}(|x - x_i| + |y - y_i|), \quad 0 \leq i < m,$$

$$d_j = w_{\text{color}}(|r - r_j| + |g - g_j| + |b - b_j|) + w_{\text{coord}}(|x - x_j| + |y - y_j|), \quad 0 \leq j < n.$$
in which w_{color} and w_{coord} are weighting factors for the respective color and pixel position information. Weighting factors w_{color} and w_{coord} are of values having a sum of 1 and otherwise selectable by a user. Preferably, weighting factors w_{color} and

30 w_{coord} are of an equal value of 0.5. Each pixel is associated with object interior 144 or exterior according to the minimum five-dimensional distance to one of the cluster

center vectors I_i and O_j .

Function block 162 indicates that a user selects at least two, and preferable more (e.g. 4 to 6), feature points in each object of an initial or key frame.

Preferably, the feature points are relatively distinctive aspects of the object. With
5 reference to rectangular solid image feature 56, for example, corners 70a-70c could be selected as feature points.

Function block 164 indicates that a block 166 of multiple pixels centered about each selected feature point (e.g., corners 70a-70c) is defined and matched to a corresponding block in a subsequent image frame (e.g., the next successive image
10 frame). Pixel block 166 is user defined, but preferably includes a 32 x 32 pixel array that includes only pixels within image interior 144. Any pixels 168 (indicated by cross-hatching) of pixel block 166 falling outside object interior 144 as determined by function block 158 (e.g., corners 70b and 70c) are omitted. Pixel blocks 166 are matched to the corresponding pixel blocks in the next image frame
15 according to a minimum absolute error identified by a conventional block match process or a polygon match process, as described below in greater detail.

Function block 170 indicates that a sparse motion transformation of an object is determined from the corresponding feature points in two successive image frames. Function block 172 indicates that mask 80 of the current image frame is transformed
20 according to the sparse motion transformation to provide an estimation of the mask 80 for the next image frame. Any feature point in a current frame not identified in a successive image frame is disregarded.

Function block 174 indicates that the resulting estimation of mask 80 for the next image frame is delayed by one frame, and functions as an outline 176 for a
25 next successive cycle. Similarly, function block 178 indicates that the corresponding feature points also are delayed by one frame, and utilized as the initial feature points 180 for the next successive frame.

POLYGON MATCH METHOD

Fig. 6 is a functional block diagram of a polygon match process 200 for determining a motion vector for each corresponding pair of pixels in successive image frames. Such a dense motion vector determination provides the basis for
5 determining the dense motion transformations 96 of Fig. 3A.

Polygon match process 200 is capable of determining extensive motion between successive image frames like the conventional block match process. In contrast to the conventional block match process, however, polygon match process 200 maintains its accuracy for pixels located near or at an object perimeter and
10 generates significantly less error. A preferred embodiment of polygon match method 200 has improved computational efficiency.

Polygon block method 200 is described with reference to Figs. 7A and 7B, which are simplified representations of display screen 50 showing two successive image frames 202a and 202b in which an image feature 204 is rendered as objects
15 204a and 204b, respectively.

Function block 206 indicates that objects 204a and 204b for image frames 202a and 202b are identified and segmented by, for example, object segmentation method 140.

Function block 208 indicates that dimensions are determined for a pixel block
20 210b (e.g., 15x15 pixels) to be applied to object 204b and a search area 212 about object 204a. Pixel block 210b defines a region about each pixel in object 204b for which region a corresponding pixel block 210a is identified in object 204a. Search area 212 establishes a region within which corresponding pixel block 210a is sought. Preferably, pixel block 210b and search area 212 are right regular arrays of pixels
25 and of sizes defined by the user.

Function block 214 indicates that an initial pixel 216 in object 204b is identified and designated the current pixel. Initial pixel 216 may be defined by any of a variety of criteria such as, for example, the pixel at the location of greatest vertical extent and minimum horizontal extent. With the pixels on display screen 50
30 arranged according to a coordinate axis 220 as shown, initial pixel 216 may be represented as the pixel of object 214b having a maximum y-coordinate value and a

-21-

minimum x-coordinate value.

Function block 222 indicates that pixel block 210b is centered at and extends about the current pixel.

Function block 224 represents an inquiry as to whether pixel block 210b includes pixels that are not included in object 204b (e.g., pixels 226 shown by cross-hatching in Fig. 7B). This inquiry is made with reference to the objects identified according to function block 206. Whenever pixels within pixel block 210b positioned at the current pixel fall outside object 204b, function block 224 proceeds to function block 228 and otherwise proceeds to function block 232.

Function block 228 indicates that pixels of pixel block 210b falling outside object 204b (e.g., pixels 226) are omitted from the region defined by pixel block 210b so that it includes only pixels within object 204b. As a result, pixel block 210b defines a region that typically would be of a polygonal shape more complex than the originally defined square or rectangular region.

Function block 232 indicates that a pixel in object 204a is identified as corresponding to the current pixel in object 204b. The pixel in object 204a is referred to as the prior corresponding pixel. Preferably, the prior corresponding pixel is identified by forming a pixel block 210a about each pixel in search area 212 and determining a correlation between the pixel block 210a and pixel block 210b about the current pixel in object 204b. Each correlation between pixel blocks 210a and 210b may be determined, for example, by an absolute error. The prior corresponding pixel is identified by identifying the pixel block 210a in search area 212 for which the absolute error relative to pixel block 210b is minimized. A summed absolute error E for a pixel block 210a relative to pixel block 210b may be determined as:

$$E = \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} (|r_{ij} - r'_{ij}| + |g_{ij} - g'_{ij}| + |b_{ij} - b'_{ij}|),$$

in which the terms r_{ij} , g_{ij} , and b_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210b and the terms r'_{ij} , g'_{ij} , and b'_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210a.

As set forth above, the summations for the absolute error E imply pixel blocks having pixel arrays having $m \times n$ pixel dimensions. Pixel blocks 210b of polygonal configuration are accommodated relatively simply by, for example, defining zero values for the color components of all pixels outside polygonal pixel blocks 210b.

Function block 234 indicates that a motion vector MV between each pixel in object 204b and the corresponding prior pixel in object 204a is determined. A motion vector is defined as the difference between the locations of the pixel in object 204b and the corresponding prior pixel in object 204a:

$$MV = (x_i - x_k', y_j - y_l'),$$

in which the terms x_i and y_j correspond to the respective x- and y-coordinate positions of the pixel in pixel block 210b, and the terms x_k' and y_l' correspond to the respective x- and y-coordinate positions of the corresponding prior pixel in pixel block 210a.

Function block 236 represents an inquiry as to whether object 204b includes any remaining pixels. Whenever object 204b includes remaining pixels, function block 236 proceeds to function block 238 and otherwise proceeds to end block 240.

Function block 238 indicates that a next pixel in object 204b is identified according to a predetermined format or sequence. With the initial pixel selected as described above in reference to function block 214, subsequent pixels may be defined by first identifying the next adjacent pixel in a row (i.e., of a common y-coordinate value) and, if object 204 includes no other pixels in a row, proceeding to the first or left-most pixel (i.e., of minimum x-coordinate value) in a next lower row. The pixel so identified is designated the current pixel and function block 238 returns to function block 222.

Polygon block method 200 accurately identifies corresponding pixels even if they are located at or near an object perimeter. A significant source of error in conventional block matching processes is eliminated by omitting or disregarding pixels of pixel blocks 210b falling outside object 204b. Conventional block matching processes rigidly apply a uniform pixel block configuration and are not applied with reference to a segmented object. The uniform block configurations

-23-

cause significant errors for pixels adjacent the perimeter of an object because the pixels outside the object can undergo significant changes as the object moves or its background changes. With such extraneous pixel variations included in conventional block matching processes, pixels in the vicinity of an object perimeter cannot be correlated accurately with the corresponding pixels in prior image frames.

For each pixel in object 204b, a corresponding prior pixel in object 204a is identified by comparing pixel block 210b with a pixel block 210a for each of the pixels in prior object 204a. The corresponding prior pixel is the pixel in object 204a having the pixel block 210a that best correlates to pixel block 210b. If processed in a conventional manner, such a determination can require substantial computation to identify each corresponding prior pixel. To illustrate, for pixel blocks having dimensions of $n \times n$ pixels, which are significantly smaller than a search area 212 having dimensions of $m \times m$ pixels, approximately $n^2 \times m^2$ calculations are required to identify each corresponding prior pixel in the prior object 204a.

PIXEL BLOCK CORRELATION PROCESS

Fig. 8 is a functional block diagram of a modified pixel block correlation process 260 that preferably is substituted for the one described with reference to function block 232. Modified correlation process 260 utilizes redundancy inherent in correlating pixel blocks 210b and 210a to significantly reduce the number of calculations required.

Correlation process 260 is described with reference to Figs. 9A-9G and 10A-10G, which schematically represent arbitrary groups of pixels corresponding to successive image frames 202a and 202b. In particular, Fig. 9A is a schematic representation of a pixel block 262 having dimensions of 5×5 pixels in which each letter corresponds to a different pixel. The pixels of pixel block 262 are arranged as a right regular array of pixels that includes distinct columns 264. Fig. 9B represents an array of pixels 266 having dimensions of $q \times q$ pixels and corresponding to a search area 212 in a prior image frame 202a. Each of the numerals in Fig. 9B represents a different pixel. Although described with reference to a conventional right regular pixel block 262, correlation process 260 is similarly applicable to

polygonal pixel blocks of the type described with reference to polygon match process 200.

Function block 268 indicates that an initial pixel block (e.g., pixel block 262) is defined with respect to a central pixel M and scanned across a search area 212 (e.g., pixel array 266) generally in a raster pattern (partly shown in Fig. 7A) as in a conventional block match process. Figs. 9C-9G schematically illustrate five of the approximately q^2 steps in the block matching process between pixel block 262 and pixel array 266.

Although the scanning of pixel block 262 across pixel array 266 is performed in a conventional manner, computations relating to the correlation between them are performed differently according to this invention. In particular, a correlation (e.g., an absolute error) is determined and stored for each column 264 of pixel block 262 in each scan position. The correlation that is determined and stored for each column 264 of pixel block 262 in each scanned position is referred to as a column correlation 270, several of which are symbolically indicated in Figs. 9C-9G by referring to the correlated pixels. To illustrate, Fig. 9C shows a column correlation 270(1) that is determined for the single column 264 of pixel block 262 aligned with pixel array 266. Similarly, Fig. 9D shows column correlations 270(2) and 270(3) that are determined for the two columns 264 of pixel block 262 aligned with pixel array 266. Figs. 9E-9G show similar column correlations with pixel block 262 at three exemplary subsequent scan positions relative to pixel array 266.

The scanning of initial pixel block 262 over pixel array 266 provides a stored array or database of column correlations. With pixel block 262 having r-number of columns 264, and pixel array 266 having qxq pixels, the column correlation database includes approximately rq^2 number of column correlations. This number of column correlations is only approximate because pixel block 262 preferably is initially scanned across pixel array 266 such that pixel M is aligned with the first row of pixels in pixel array 266.

The remaining steps beginning with the one indicated in Fig. 9C occur after two complete scans of pixel block 262 across pixel array 266 (i.e., with pixel M aligned with the first and second rows of pixel array 266).

Function block 274 indicates that a next pixel block 276 (Fig. 10A) is defined from, for example, image frame 202b with respect to a central pixel N in the same row as pixel M. Pixel block 276 includes a column 278 of pixels not included in pixel block 262 and columns 280 of pixels included in pixel block 262. Pixel
5 block 276 does not include a column 282 (Fig. 9A) that was included in pixel block 262. Such an incremental definition of next pixel block 276 is substantially the same as that used in conventional block matching processes.

Function block 284 indicates that pixel block 276 is scanned across pixel array 266 in the manner described above with reference to function block 268. As
10 with Figs. 9C-9G, Figs. 10B-10G represent the scanning of pixel block 276 across pixel array 266.

Function block 286 indicates that for column 278 a column correlation is determined and stored at each scan position. Accordingly, column correlations 288(1)-288(5) are made with respect to the scanned positions of column 278 shown
15 in respective Figs. 10B-10F.

Function block 290 indicates that for each of columns 280 in pixel block 276 a stored column determination is retrieved for each scan position previously computed and stored in function block 268. For example, column correlation 270(1) of Fig. 9C is the same as column correlation 270'(1) of Fig. 10C. Similarly, column
20 correlations 270'(2), 270'(3), 270'(5)-270'(8), and 270'(15)-270'(18) of Figs. 10D-10F are the same as the corresponding column correlations in Figs. 9D, 9E, and 9G. For pixel block 276, therefore, only one column correlation 288 is calculated for each scan position. As a result, the number of calculations required for pixel block 276 is reduced by nearly 80 percent.

Function block 292 indicates that a subsequent pixel block 294 (Fig. 11A) is defined with respect to a central pixel R in the next successive row relative to pixel M. Pixel block 294 includes columns 296 of pixels that are similar to but distinct from columns 264 of pixels in pixel block 262 of Fig. 9A. In particular, columns 296 include pixels A'-E' not included in columns 264. Such an incremental
30 definition of subsequent pixel block 294 is substantially the same as that used in conventional block matching processes.

Function block 298 indicates that pixel block 294 is scanned across pixel array 266 (Fig. 9B) in the manner described above with reference to function blocks 268 and 276. Figs. 11B-11F represent the scanning of pixel block 294 across pixel array 266.

5 Function block 300 indicates that a column correlation is determined and stored for each of columns 296. Accordingly, column correlations 302(1)-302(18) are made with respect to the scanned positions of columns 296 shown in Figs. 11B-11F.

10 Each of column correlations 302(1)-302(18) may be calculated in an abbreviated manner with reference to column correlations made with respect to pixel block 262 (Fig. 9A).

For example, column correlations 302(4)-302(8) of Fig. 11D include subcolumn correlations 304'(4)-304'(8) that are the same as subcolumn correlations 304(4)-304(8) of Fig. 9E. Accordingly, column correlations 302(4)-302(8) may be
15 determined from respective column correlations 270(4)-270(8) by subtracting from the latter correlation values for pixels 01A, 02B, 03C, 04D, and 05E to form subcolumn correlations 304(4)-304(8), respectively. Column correlations 302(4)-302(8) may be obtained by adding correlation values for the pixel pairs 56A', 57B', 58C', 59D' and 50E' to the respective subcolumn correlation values 304(4)-304(8),
20 respectively.

The determination of column correlations 302(4)-302(8) from respective column correlations 270(4)-270(8) entails subtracting individual pixel correlation values corresponding to the row of pixels A-E of pixel block 262 not included in pixel block 294, and adding pixel correlation values for the row of pixels A'-E'
25 included in pixel block 294 but not pixel block 262. This method substitutes for each of column correlations 302(4)-302(8), one subtraction and one addition for the five additions that would be required to determine each column correlation in a conventional manner. With pixel blocks of larger dimensions as are preferred, the improvement of this method over conventional calculation methods is even greater.
30 Conventional block matching processes identify only total block correlations for each scan position of initial pixel block 262 relative to pixel array 266. As a

-27-

consequence, all correlation values for all pixels must be calculated separately for each scan position. In contrast, correlation process 260 utilizes stored column correlations 270 to significantly reduce the number of calculations required. The improvements in speed and processor resource requirements provided by correlation process 260 more than offset the system requirements for storing the column correlations.

It will be appreciated that correlation process 260 has been described with reference to Figs. 9-11 to illustrate specific features of this invention. As shown in the illustrations, this invention includes recurring or cyclic features that are particularly suited to execution by a computer system. These recurring or cyclic features are dependent upon the dimensions of pixel blocks and pixel arrays and are well understood and can be implemented by persons skilled in the art.

MULTI-DIMENSIONAL TRANSFORMATION

Fig. 12 is a functional block diagram of a transformation method 350 that includes generating a multi-dimensional transformation between objects in first and second successive image frames and quantizing the mapping for transmission or storage. The multi-dimensional transformation preferably is utilized in connection with function block 96 of Fig. 3. Transformation method 350 is described with reference to Fig. 7A and Fig. 13, the latter of which like Fig. 7B is a simplified representation of display screen 50 showing image frame 202b in which image feature 204 is rendered as object 204b.

Transformation method 350 preferably provides a multi-dimensional affine transformation capable of representing complex motion that includes any or all of translation, rotation, magnification, and shear. Transformation method 350 provides a significant improvement over conventional video compression methods such as MPEG-1, MPEG-2, and H.26X, which are of only one dimension and represent only translation. In this regard, the dimensionality of a transformation refers to the number of coordinates in the generalized form of the transformation, as described below in greater detail. Increasing the accuracy with which complex motion is represented according to this invention results in fewer errors than by conventional

representations, thereby increasing compression efficiency.

Function block 352 indicates that a dense motion estimation of the pixels in objects 204a and 204b is determined. Preferably, the dense motion estimation is obtained by polygon match process 200. As described above, the dense motion
5 estimation includes motion vectors between pixels at coordinates (x_i, y_i) in object 204b of image frame 202b and corresponding pixels at locations (x_i', y_i') of object 204a in image frame 202a.

Function block 354 indicates that an array of transformation blocks 356 is defined to encompass object 204b. Preferably, transformation blocks 356 are right
10 regular arrays of pixels having dimensions of, for example, 32x32 pixels.

Function block 358 indicates that a multi-dimensional affine transformation is generated for each transformation block 356. Preferably, the affine transformations are of first order and represented as:

$$x_i' = ax_i + by_i + c$$

$$15 \quad y_i' = dx_i + ey_i + f,$$

and are determined with reference to all pixels for which the motion vectors have a relatively high confidence. These affine transformations are of two dimensions in that x_i and y_i are defined relative to two coordinates: x_i and y_i .

The relative confidence of the motion vectors refers to the accuracy with
20 which the motion vector between corresponding pixels can be determined uniquely relative to other pixels. For example, motion vectors between particular pixels that are in relatively large pixel arrays and are uniformly colored (e.g., black) cannot typically be determined accurately. In particular, for a black pixel in a first image frame, many pixels in the pixel array of the subsequent image frame will have the
25 same correlation (i.e., absolute value error between pixel blocks).

In contrast, pixel arrays in which pixels correspond to distinguishing features typically will have relatively high correlations for particular corresponding pixels in successive image frames.

The relatively high correlations are preferably represented as a minimal
30 absolute value error determination for particular pixel. Motion vectors of relatively high confidence may, therefore, be determined relative to such uniquely low error

-29-

values. For example, a high confidence motion vector may be defined as one in which the minimum absolute value error for the motion vector is less than the next greater error value associated with the pixel by a difference amount that is greater than a threshold difference amount. Alternatively, high confidence motion vectors
5 may be defined with respect to the second order derivative of the absolute error values upon which the correlations are determined. A second order derivative of more than a particular value would indicate a relatively high correlation between specific corresponding pixels.

With n-number of pixels with such high-confidence motion vectors, the
10 preferred affine transformation equations are solved with reference to n-number of corresponding pixels in image frames 202a and 202b. Images frames must include at least three corresponding pixels in image frames 202a and 202b with high confidence motion vectors to solve for the six unknown coefficients a, b, c, d, e, and f of the preferred affine transformation equations. With the preferred dimensions,
15 each of transformation blocks 356 includes 2^{10} pixels of which significant numbers typically have relatively high confidence motion vectors. Accordingly, the affine transformation equations are over-determined in that a significantly greater number of pixels are available to solve for the coefficients a, b, c, d, e, and f.

The resulting n-number of equations may be represented by the linear
20 algebraic expression:

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_{n-1} & Y_{n-1} & 1 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} = \begin{bmatrix} X'_0 \\ X'_1 \\ \cdot \\ \cdot \\ \cdot \\ X'_{N-1} \end{bmatrix}$$

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_{n-1} & Y_{n-1} & 1 \end{bmatrix} \begin{bmatrix} d \\ e \\ f \end{bmatrix} = \begin{bmatrix} Y'_0 \\ Y'_1 \\ \cdot \\ \cdot \\ \cdot \\ Y'_{N-1} \end{bmatrix}$$

5

Preferably these equations are solved by a conventional singular value decomposition (SVD) method, which provides a minimal least-square error for the approximation of the dense motion vectors. A conventional SVD method is described, for example, in Numerical Recipes in C, by Press et al., Cambridge University Press, (1992).

10

As described above, the preferred two-dimensional affine transformation equations are capable of representing translation, rotation, magnification, and shear of transformation blocks 356 between successive image frames 202a and 202b. In contrast, conventional motion transformation methods used in prior compression standards employ simplified transformation equations of the form:

15

-31-

$$x_i' = x_i + g$$

$$y_i' = y_i + h$$

The prior simplified transformation equations represent motion by only two coefficients, g and h , which represents only one-third the amount of information (i.e., coefficients) obtained by the preferred multi-dimensional transformation equations. To obtain superior compression of the information obtained by transformation method 350 relative to conventional compression methods, the dimensions of transformation block 356 preferably are more than three times larger than the corresponding 16x16 pixel blocks employed in MPEG-1 and MPEG-2 compression methods. The preferred 32x32 pixel dimensions of transformation blocks 356 encompass four times the number of pixels employed in the transformation blocks of conventional transformation methods. The larger dimensions of transformation blocks 356, together with the improved accuracy with which the affine transformation coefficients represent motion of the transformation blocks 356, allow transformation method 350 to provide greater compression than conventional compression methods.

It will be appreciated that the affine coefficients generated according to the present invention typically would be non-integer, floating point values that could be difficult to compress adequately without adversely affecting their accuracy. Accordingly, it is preferable to quantize the affine transformation coefficient to reduce the bandwidth required to store or transmit them.

Function block 362 indicates that the affine transformation coefficients generated with reference to function block 358 are quantized to reduce the bandwidth required to store or transmit them. Fig. 14 is an enlarged fragmentary representation of a transformation block 356 showing three selected pixels, 364a, 364b, and 364c from which the six preferred affine transformation coefficients a-f may be determined.

Pixels 364a-364c are represented as pixel coordinates (x_1, y_1) , (x_2, y_2) , and (x_3, y_3) , respectively. Based upon the dense motion estimation of function block 352, pixels 364a-364c have respective corresponding pixels (x_1', y_1') , (y_2', y_2') , (x_3', y_3') in preceding image frame 202a. As is conventional, pixel locations (x_i, y_i) are

represented by integer values and are solutions to the affine transformation equations upon which the preferred affine transformation coefficients are based. Accordingly, selected pixels 364a-364c are used to calculate the corresponding pixels from the preceding image frame 202a, which typically will be floating point values.

5 Quantization of these floating point values is performed by converting to integer format the difference between corresponding pixels $(x_i - x'_i, y_i - y'_i)$. The affine transformation coefficients are determined by first calculating the pixel values (x'_i, y'_i) from the difference vectors and the pixel values (x_i, y_i) , and then solving the multi-dimensional transformation equations of function block 358 with respect to the
10 pixel values (x'_i, y'_i) .

As shown in Fig. 14, pixels 364a-364c preferably are distributed about transformation block 356 to minimize the sensitivity of the quantization to local variations within transformation block 356. Preferably, pixel 364a is positioned at or adjacent the center of transformation block 356, and pixels 364b and 364c are
15 positioned at upper corners. Also in the preferred embodiment, the selected pixels for each of the transformation blocks 356 in object 204b have the same positions, thereby allowing the quantization process to be performed efficiently.

Another aspect of the quantization method of function block 362 is that different levels of quantization may be used to represent varying degrees of motion.
20 As a result, relatively simple motion (e.g., translation) may be represented by fewer selected pixels 364 than are required to represent complex motion. With respect to the affine transformation equations described above, pixel 364a (x_i, y_i) from object 204b and the corresponding pixel (x'_i, y'_i) from object 204a are sufficient to solve simplified affine transformation equations of the form:

25
$$x'_i = y_i + c$$
$$y'_i = y_i + f,$$

which represent translation between successive image frames. Pixel 364a specifically is used because its central position generally represents translational motion independent of the other types of motion. Accordingly, a user may
30 selectively represent simplified motion such as translation with simplified affine transformation equations that require one-third the data required to represent

-33-

complex motion.

Similarly, a pair of selected pixels (x_1, y_1) (e.g., pixel 364a) and (x_2, y_2) (i.e., either of pixels 364b and 364c) from object 204b and the corresponding pixels (x_1', y_1') and (x_2', y_2') from object 204a are sufficient to solve simplified affine

5 transformation equations of the form:

$$x_1' = ax_1 + c$$

$$y_1' = ey_1 + f,$$

which are capable of representing motions that include translation and magnification between successive image frames. In the simplified form:

10
$$x' = a \cos \theta x + \sin \theta y + c$$

$$y' = -\sin \theta x + a \cos \theta y + f$$

the corresponding pairs of selected pixels are capable of representing motions that include translation, rotation, and isotropic magnification. In this simplified form, the common coefficients of the x and y variables allow the equations to be solved by

15 two corresponding pairs of pixels.

Accordingly, a user may selectively represent moderately complex motion that includes translation, rotation, and magnification with partly simplified affine transformation equations. Such equations would require two-thirds the data required to represent complex motion. Adding the third selected pixel (x_3, y_3) from object
20 204b, the corresponding pixel (x_3', y_3') from object 204a, and the complete preferred affine transformation equations allows a user also to represent shear between successive image frames.

A preferred embodiment of transformation method 350 (Fig. 12) is described as using uniform transformation blocks 356 having dimensions of, for example,
25 32x32 pixels. The preferred multi-dimensional affine transformations described with reference to function block 358 are determined with reference to transformation blocks 356. It will be appreciated that the dimensions of transformation blocks 356 directly affect the compression ratio provided by this method.

Fewer transformation blocks 356 of relatively large dimensions are required
30 to represent transformations of an object between image frames than the number of transformation blocks 356 having smaller dimensions. A consequence of uniformly

large transformation blocks 356 is that correspondingly greater error can be introduced for each transformation block. Accordingly, uniformly sized transformation blocks 356 typically have moderate dimensions to balance these conflicting performance constraints.

5

TRANSFORMATION BLOCK OPTIMIZATION

Fig. 15 is a functional block diagram of a transformation block optimization method 370 that automatically selects transformation block dimensions that provide a minimal error threshold. Optimization method 370 is described with reference to
10 Fig. 16, which is a simplified representation of display screen 50 showing a portion of image frame 202b with object 204b.

Function block 372 indicates that an initial transformation block 374 is defined with respect to object 204b. Initial transformation block 374 preferably is of maximal dimensions that are selectable by a user and are, for example, 64x64 pixels.
15 Initial transformation block 374 is designated the current transformation block.

Function block 376 indicates that a current peak signal-to-noise ratio (SNR) is calculated with respect to the current transformation block. The signal-to-noise ratio preferably is calculated as the ratio of the variance of the color component values of the pixel within the current transformation block (i.e., the signal) to the
20 variance of the color components values of the pixels associated with estimated error 110 (Fig. 3).

Function block 378 indicates that the current transformation block (e.g., transformation block 374) is subdivided into, for example, four equal sub-blocks 380a-380d, affine transformations are determined for each of sub-blocks 380a-380d,
25 and a future signal-to-noise ratio is determined with respect to the affine transformations. The future signal-to-noise ratio is calculated in substantially the same manner as the current signal-to-noise ratio described with reference to function block 376.

Inquiry block 382 represents an inquiry as to whether the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than a user-selected threshold amount. This inquiry represents a determination that further
30

subdivision of the current transformation block (e.g., transformation block 374) would improve the accuracy of the affine transformations by at least the threshold amount. Whenever the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than the threshold amount, inquiry block 382 proceeds to
5 function block 384, and otherwise proceeds to function block 388.

Function block 384 indicates that sub-blocks 380a-380d are successively designated the current transformation block, and each are analyzed whether to be further subdivided. For purposes of illustration, sub-block 380a is designated the current transformation and processed according to function block 376 and further
10 sub-divided into sub-blocks 386a-386d. Function block 388 indicates that a next successive transformation block 374' is identified and designated an initial or current transformation block.

PRECOMPRESSION EXTRAPOLATION METHOD

15 Figs. 17A and B are a functional block diagram of a precompression extrapolation method 400 for extrapolating image features of arbitrary configuration to a predefined configuration to facilitate compression in accordance with function block 112 of encoder process 64 (both of Fig. 3). Extrapolation method 400 allows the compression of function block 112 to be performed in a conventional manner
20 such as DCT or lattice or other wavelet compression, as described above.

Conventional still image compression methods such as lattice or other wavelet compression or discrete cosine transforms (DCT) operate upon rectangular arrays of pixels. As described above, however, the methods of the present invention are applicable to image features or objects of arbitrary configuration. Extrapolating
25 such objects or image features to a rectangular pixel array configuration allows use of conventional still image compression methods such as lattice or other wavelet compression or DCT. Extrapolation method 400 is described below with reference to Figs. 18A-18D, which are representations of display screen 50 on which a simple object 402 is rendered to show various aspects of extrapolation method 400.

30 Function block 404 indicates that an extrapolation block boundary 406 is defined about object 402. Extrapolation block boundary 406 preferably is

rectangular. Referring to Fig. 18A, the formation of extrapolation block boundary 406 about object 402 is based upon an identification of a perimeter 408 of object 402 by, for example, object segmentation method 140 (Fig. 4). Extrapolation block boundary 406 is shown encompassing object 402 in its entirety for purposes of illustration. It will be appreciated that extrapolation block boundary 406 could alternatively encompass only a portion of object 402. As described with reference to object segmentation method 140, pixels included in object 402 have color component values that differ from those of pixels not included in object 402.

Function block 410 indicates that all pixels 412 bounded by extrapolation block boundary 406 and not included in object 402 are assigned a predefined value such as, for example, a zero value for each of the color components.

Function block 414 indicates that horizontal lines of pixels within extrapolation block boundary 406 are scanned to identify horizontal lines with horizontal pixel segments having both zero and non-zero color component values.

Function block 416 represents an inquiry as to whether the horizontal pixel segments having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18B, region 418 represents horizontal pixel segments having color component values of zero that are bounded at both ends by perimeter 408. Regions 420 represent horizontal pixel segments that have color component values of zero and are bounded at only one end by perimeter 408. Function block 416 proceeds to function block 426 for regions 418 in which the pixel segments have color component values of zero bounded at both ends by perimeter 408 of object 402, and otherwise proceeds to function block 422.

Function block 422 indicates that the pixels in each horizontal pixel segment of a region 420 is assigned the color component values of a pixel 424 (only exemplary ones shown) in the corresponding horizontal lines and perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in regions 420 are functionally related to the color component values of pixels 424.

Function block 426 indicates that the pixels in each horizontal pixel segment in region 418 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 428a and 428b that are

in the corresponding horizontal lines and on perimeter 408.

Function block 430 indicates that vertical lines of pixels within extrapolation block boundary 406 are scanned to identify vertical lines with vertical pixel segments having both zero and non-zero color component values.

5 Function block 432 represents an inquiry as to whether the vertical pixel segments in vertical lines having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18C, region 434 represents vertical pixel segments having color component values of zero that are bounded at both ends by perimeter 408. Regions 436 represent vertical pixel
10 segments that have color component values of zero and are bounded at only one end by perimeter 408. Function block 432 proceeds to function block 444 for region 434 in which the vertical pixel segments have color component values of zero bounded at both ends by perimeter 408 of object 402, and otherwise proceeds to function block 438.

15 Function block 438 indicates that the pixels in each vertical pixel segment of region 436 are assigned the color component values of pixels 442 (only exemplary ones shown) in the vertical lines and perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in region 436 are functionally related to the color component values of pixels 442.

20 Function block 444 indicates that the pixels in each vertical pixel segment in region 434 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 446a and 446b that are in the horizontal lines and on perimeter 408.

25 Function block 448 indicates that pixels that are in both horizontal and vertical pixel segments that are assigned color component values according to this method are assigned composite color component values that relate to, and preferably are the average of, the color component values otherwise assigned to the pixels according to their horizontal and vertical pixel segments.

30 Examples of pixels assigned such composite color component values are those pixels in regions 418 and 434.

Function block 450 indicates that regions 452 of pixels bounded by

extrapolation block boundary 406 and not intersecting perimeter 408 of object 402 along a horizontal or vertical line are assigned composite color component values that are related to, and preferably equal to the average of, the color component values assigned to adjacent pixels. Referring to Fig. 18D, each of pixels 454 in regions 452 is assigned a color component value that preferably is the average of the color component values of pixels 456a and 456b that are aligned with pixel 454 along respective horizontal and vertical lines and have non-zero color component values previously assigned by this method.

A benefit of object extrapolation process 400 is that it assigns smoothly varying color component values to pixels not included in object 402 and therefore optimizes the compression capabilities and accuracy of conventional still image compression methods. In contrast, prior art zero padding or mirror image methods, as described by Chang et al., "Transform Coding of Arbitrarily-Shaped Image Segments," ACM Multimedia, pp. 83-88, June, 1993, apply compression to extrapolated objects that are filled with pixels having zero color components values such as those applied in function block 410. The drastic image change that occurs between an object and the zero-padded regions introduces high frequency changes that are difficult to compress or introduce image artifacts upon compression. Object extrapolation method 400 overcomes such disadvantages.

ALTERNATIVE ENCODER METHOD

Fig. 19A is a functional block diagram of an encoder method 500 that employs a Laplacian pyramid encoder with unique filters that maintain nonlinear aspects of image features, such as edges, while also providing high compression. Conventional Laplacian pyramid encoders are described, for example, in the Laplacian Pyramid as a Compact Image Code by Burt and Addleson, IEEE Trans. Comm., Vol. 31, No. 4, pp. 532-540, April 1983. Encoder method 500 is capable of providing the encoding described with reference to function block 112 of video compression encoder process 64 shown in Fig. 3, as well as whenever else DCT or wavelet encoding is suggested or used. By way of example, encoder method 500 is described with reference to encoding of estimated error 110 (Fig. 3).

A first decimation filter 502 receives pixel information corresponding to an estimated error 110 (Fig. 3) and filters the pixels according to a filter criterion. In a conventional Laplacian pyramid method, the decimation filter is a low-pass filter such as a Gaussian weighting function. In accordance with encoder method 500,
5 however, decimation filter 502 preferably employs a median filter and, more specifically, a 3x3 nonseparable median filter.

To illustrate, Fig. 20A is a simplified representation of the color component values for one color component (e.g., red) for an arbitrary set or array of pixels 504. Although described with particular reference to red color component values, this
10 illustration is similarly applied to the green and blue color component values of pixels 504.

With reference to the preferred embodiment of decimation filter 502, filter blocks 506 having dimensions of 3x3 pixels are defined among pixels 504. For each pixel block 506, the median pixel intensity value is identified or selected. With
15 reference to pixel blocks 506a-506c, for example, decimation filter 502 provides the respective values of 8, 9, and 10, which are listed as the first three pixels 512 in Fig. 20B.

It will be appreciated, however, that decimation filter 502 could employ other median filters according to this invention. Accordingly, for each group of pixels
20 having associated color component values of $\{a_0, a_1, \dots, a_{n-1}\}$ the median filter would select a median value a_M .

A first 2x2 down sampling filter 514 samples alternate pixels 512 in vertical and horizontal directions to provide additional compression. Fig. 20C represents a resulting compressed set of pixels 515.

25 A 2x2 up sample filter 516 inserts a pixel of zero value in place of each pixel 512 omitted by down sampling filter 514, and interpolation filter 518 assigns to the zero-value pixel a pixel value of an average of the opposed adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero value pixels. To illustrate, Fig. 20D represents a resulting set or array of
30 value pixels 520.

A difference 522 is taken between the color component values of the set of

pixels 504 and the corresponding color component values for set of pixels 520 to form a zero-order image component I_0 .

A second decimation filter 526 receives color component values corresponding to the compressed set of pixels 515 generated by first 2x2 down sampling filter 514. Decimation filter 526 preferably is the same as decimation filter 502 (e.g., a 3x3 nonseparable median filter). Accordingly, decimation filter 526 functions in the same manner as decimation filter 502 and delivers a resulting compressed set or array of pixels (not shown) to a second 2x2 down sampling filter 528.

Down sampling filter 528 functions in the same manner as down sampling filter 514 and forms a second order image component L_2 that also is delivered to a 2x2 up sample filter 530 and an interpolation filter 531 that function in the same manner as up sample filter 516 and interpolation filter 518, respectively. A difference 532 is taken between the color component values of the set of pixels 515 and the resulting color component values provided by interpolation filter 531 to form a first-order image component I_1 .

The image components I_0 , I_1 , and L_2 are respective

$$n \times n, \quad \frac{n}{2} \times \frac{n}{2}, \quad \frac{n}{4} \times \frac{n}{4}$$

sets of color component values that represent the color component values for an $n \times n$ array of pixels 504.

Image component I_0 maintains the high frequency components (e.g., edges) of an image represented by the original set of pixel 504. Image components I_1 and L_2 represent low frequency aspects of the original image. Image components I_0 , I_1 and L_2 provide relative compression of the original image. Image component I_0 and I_1 maintain high frequency features (e.g., edges) in a format that is highly compressible due to the relatively high correlation between the values of adjacent pixels. Image component L_2 is not readily compressible because it includes primarily low frequency image features, but is a set of relatively small size.

Fig. 19B is a functional block diagram of a decoder method 536 that decodes

or inverse encodes image components I_0 , I_1 , and L_2 generated by encoder method 500. Decoder method 536 includes a first 2x2 up sample filter 538 that receives image component L_2 and interposes a pixel of zero value between each adjacent pair of pixels. An interpolation filter 539 assigns to the zero-value pixel a pixel value
5 that preferably is an average of the values of the adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero-value pixels. First 2x2 up sample filter 538 operates in substantially the same manner as up sample filters 516 and 530 of Fig. 19A, and interpolation filter 539 operates in substantially the same manner as interpolation filters 518 and 531.

10 A sum 540 is determined between image component I_1 and the color component values corresponding to the decompressed set of pixels generated by first 2x2 up sample filter 538 and interpolation filter 539. A second 2x2 up sample filter 542 interposes a pixel of zero value between each adjacent pair of pixels generated by sum 540. An interpolation filter 543 assigns to the zero-value pixel a pixel value
15 that includes an average of the values of the adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero-value pixels. Up sample filter 542 and interpolation filter 543 are substantially the same as up sample filter 538 and interpolation filter 539, respectively.

A sum 544 sums the image component I_0 with the color component values
20 corresponding to the decompressed set of pixels generated by second 2x2 up sample filter 542 and interpolation filter 543. Sum 544 provides decompressed estimated error 110 corresponding to the estimated error 110 delivered to encoder process 500.

TRANSFORM CODING OF MOTION VECTORS

25 Conventional video compression encoder processes, such as MPEG-1 or MPEG-2, utilize only sparse motion vector fields to represent the motion of significantly larger pixel arrays of a regular size and configuration. The motion vector fields are sparse in that only one motion vector is used to represent the motion of a pixel array having dimensions of, for example, 16 x 16 pixels. The
30 sparse motion vector fields, together with transform encoding of underlying images or pixels by, for example, discrete cosine transform (DCT) encoding, provide

conventional video compression encoding.

In contrast, video compression encoding process 64 (Fig. 3) utilizes dense motion vector fields in which motion vectors are determined for all, or virtually all, pixels of an object. Such dense motion vector fields significantly improve the accuracy with which motion between corresponding pixels is represented. Although the increased accuracy can significantly reduce the errors associated with conventional sparse motion vector field representations, the additional information included in dense motion vector fields represent an increase in the amount of information representing a video sequence. In accordance with this invention, therefore, dense motion vector fields are themselves compressed or encoded to improve the compression ratio provided by this invention.

Fig. 21 is a functional block diagram of a motion vector encoding process 560 for encoding or compressing motion vector fields and, preferably, dense motion vector fields such as those generated in accordance with dense motion transformation 96 of Fig. 3. It will be appreciated that such dense motion vector fields from a selected object typically will have greater continuity or "smoothness" than the underlying pixels corresponding to the object. As a result, compression or encoding of the dense motion vector fields will attain a greater compression ratio than would compression or encoding of the underlying pixels.

Function block 562 indicates that a dense motion vector field is obtained for an object or a portion of an object in accordance with, for example, the processes of function block 96 described with reference to Fig. 3. Accordingly, the dense motion vector field will correspond to an object or other image portion of arbitrary configuration or size.

Function block 564 indicates that the configuration of the dense motion vector field is extrapolated to a regular, preferably rectangular, configuration to facilitate encoding or compression. Preferably, the dense motion vector field configuration is extrapolated to a regular configuration by precompression extrapolation method 400 described with reference to Figs. 17A and 17B. It will be appreciated that conventional extrapolation methods, such as a mirror image method, could alternatively be utilized.

Function block 566 indicates that the dense motion vector field with its extrapolated regular configuration is encoded or compressed according to conventional encoding transformations such as, for example, discrete cosine transformation (DCT) or lattice or other wavelet compression, the former of which is preferred.

Function block 568 indicates that the encoded dense motion vector field is further compressed or encoded by a conventional lossless still image compression method such as entropy encoding to form an encoded dense motion vector field 570. Such a still image compression method is described with reference to function block 114 of Fig. 3.

COMPRESSION OF QUANTIZED OBJECTS FROM PREVIOUS VIDEO FRAMES

Referring to Fig. 3A, video compression encoder process 64 uses quantized prior object 126 determined with reference to a prior frame N-1 to encode a corresponding object in a next successive frame N. As a consequence, encoder process 64 requires that quantized prior object 126 be stored in an accessible memory buffer. With conventional video display resolutions, such a memory buffer would require a capacity of at least one-half megabyte to store the quantized prior object 126 for a single video frame. Higher resolution display formats would require correspondingly larger memory buffers.

Fig. 22 is a functional block diagram of a quantized object encoder-decoder (codec) process 600 that compresses and selectively decompresses quantized prior objects 126 to reduce the required capacity of a quantized object memory buffer.

Function block 602 indicates that each quantized object 126 in an image frame is encoded on a block-by-block manner by a lossy encoding or compression method such as discrete cosine transform (DCT) encoding or lattice sub-band or other wavelet compression. As shown in Fig. 21, lossy encoded information can undergo additional lossless encoding. Alternatively, lossless encoding alone can be used.

Function block 604 indicates that the encoded or compressed quantized objects are stored in a memory buffer (not shown).

Function block 606 indicates that encoded quantized objects are retrieved from the memory buffer in anticipation of processing a corresponding object in a next successive video frame.

Function block 608 indicates that the encoded quantized object is inverse
5 encoded by, for example, DCT or wavelet decoding according to the encoding processes employed with respect to function block 602.

Codec process 600 allows the capacity of the corresponding memory buffer to be reduced by up to about 80%, depending upon the overall video compression ratio and the desired quality of the resultant video. Moreover, it will be appreciated
10 that codec process 600 is similarly applicable to the decoder process corresponding to video compression encoder process 64.

VIDEO COMPRESSION DECODER PROCESS OVERVIEW

Video compression encoder process 64 of Fig. 3 provides encoded or
15 compressed representations of video signals corresponding to video sequences of multiple image frames. The compressed representations include object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116 from encoder process 64 and compressed master objects 136 from encoder process 130. These compressed representations facilitate storage or transmission of video
20 information, and are capable of achieving compression ratios of up to 300 percent greater than those achievable by conventional video compression methods such as MPEG-2.

It will be appreciated, however, that retrieving such compressed video information from data storage or receiving transmission of the video information
25 requires that it be decoded or decompressed to reconstruct the original video signal so that it can be rendered by a display device such as video display device 52 (Figs. 2A and 2B). As with conventional encoding processes such as MPEG-1, MPEG-2, and H.26X, the decompression or decoding of the video information is substantially the inverse of the process by which the original video signal is encoded or
30 compressed.

Fig. 23A is a functional block diagram of a video compression decoder

process 700 for decompressing video information generated by video compression encoder process 64 of Fig. 3. For purposes of consistency with the description of encoder process 64, decoder process 700 is described with reference to Figs. 2A and 2B. Decoder process 700 retrieves from memory or receives as a transmission
5 encoded video information that includes object masks 66, feature points 68, compressed master objects 136, affine transform coefficients 104, and compressed error data 116.

Decoder process 700 performs operations that are the inverse of those of encoder process 64 (Fig. 3). Accordingly, each of the above-described preferred
10 operations of encoder process 64 having a decoding counterpart would similarly be inversed.

Function block 702 indicates that masks 66, feature points 68, transform coefficients 104, and compressed error data 116 are retrieved from memory or received as a transmission for processing by decoder process 700.

15 Fig. 23B is a functional block diagram of a master object decoder process 704 for decoding or decompressing compressed master object 136. Function block 706 indicates that compressed master object data 136 are entropy decoded by the inverse of the conventional lossless entropy encoding method in function block 134 of Fig. 3B. Function block 708 indicates that the entropy decoded master object
20 from function block 706 is decoded according to an inverse of the conventional lossy wavelet encoding process used in function block 132 of Fig. 3B.

Function block 712 indicates that dense motion transformations, preferably multi-dimensional affine transformations, are generated from affine coefficients 104. Preferably, affine coefficients 104 are quantized in accordance with transformation
25 method 350 (Fig. 12), and the affine transformations are generated from the quantized affine coefficients by performing the inverse of the operations described with reference to function block 362 (Fig. 12).

Function block 714 indicates that a quantized form of an object 716 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) provided via
30 a timing delay 718 is transformed by the dense motion transformation to provide a predicted form of the object 720 in a current frame N (e.g., rectangular solid object

56b in image frame 54b).

Function block 722 indicates that for image frame N, predicted current object 720 is added to a quantized error 724 generated from compressed error data 116. In particular, function block 726 indicates that compressed error data 116 is decoded by
5 an inverse process to that of compression process 114 (Fig. 3A). In the preferred embodiment, function blocks 114 and 726 are based upon a conventional lossless still image compression method such as entropy encoding.

Function block 728 indicates that the entropy decoded error data from function block 726 is further decompressed or decoded by a conventional lossy still
10 image compression method corresponding to that utilized in function block 112 (Fig. 3A). In the preferred embodiment, the decompression or decoding of function block 728 is by a lattice subband or other wavelet process or a discrete cosine transform (DCT) process.

Function block 722 provides quantized object 730 for frame N as the sum of
15 predicted object 720 and quantized error 724, representing a reconstructed or decompressed object 732 that is delivered to function block 718 for reconstruction of the object in subsequent frames.

Function block 734 indicates that quantized object 732 is assembled with
20 other objects of a current image frame N to form a decompressed video signal.

SIMPLIFIED CHAIN ENCODING

Masks, objects, sprites, and other graphical features, commonly are represented by their contours. As shown in and explained with reference to FIG. 5A, for example, rectangular solid object 56a is bounded by an object perimeter or
25 contour 142. A conventional process of encoding or compressing contours is referred to as chain encoding.

FIG. 24A shows a conventional eight-point chain code 800 from which contours on a conventional recta-linear pixel array are defined. Based upon a current pixel location X, a next successive pixel location in the contour extends in
30 one of directions 802a-802h. The chain code value for the next successive pixel is the numeric value corresponding to the particular direction 802. As examples, the

right, horizontal direction 802a corresponds to the chain code value 0, and the downward, vertical direction 802g corresponds to the chain code value 6. Any continuous contour can be described from eight-point chain code 800.

With reference to FIG. 24B, a contour 804 represented by pixels 806
5 designated X and A-G can be encoded in a conventional manner by the chain code sequence {00764432}. In particular, beginning from pixel X, pixels A and B are positioned in direction 0 relative to respective pixels X and A. Pixel C is positioned in direction 7 relative to pixel B. Remaining pixels D-G are similarly positioned in
10 directions corresponding to the chain code values listed above. In a binary representation, each conventional chain code value is represented by three digital bits.

FIG. 25A is a functional block diagram of a chain code process 810 of the present invention capable of providing contour compression ratios at least about twice those of conventional chain code processes. Chain code process 810 achieves
15 such improved compression ratios by limiting the number of chain codes and defining them relative to the alignment of adjacent pairs of pixels. Based upon experimentation, it has been discovered that the limited chain codes of chain code process 810 directly represent more than 99.8% of pixel alignments of object or mask contours. Special case chain code modifications accommodate the remaining
20 less than 0.2% of pixel alignment as described below in greater detail.

Function block 816 indicates that a contour is obtained for a mask, object, or sprite. The contour may be obtained, for example, by object segmentation process 140 described with reference to FIGS. 4 and 5.

Function block 818 indicates that an initial pixel in the contour is identified.
25 The initial pixel may be identified by common methods such as, for example, a pixel with minimal X-axis and Y-axis coordinate positions.

Function block 820 indicates that a predetermined chain code is assigned to represent the relationship between the initial pixel and the next adjacent pixel in the contour. Preferably, the predetermined chain code is defined to correspond to the
30 forward direction.

FIG. 25B is a diagrammatic representation of a three-point chain code 822 of

the present invention. Chain code 822 includes three chain codes 824a, 824b, and 824c that correspond to a forward direction 826a, a leftward direction 826b, and a rightward direction 826c, respectfully. Directions 826a-826c are defined relative to a preceding alignment direction 828 between a current pixel 830 and an adjacent
5 pixel 832 representing the preceding pixel in the chain code.

Preceding alignment direction 828 may extend in any of the directions 802 shown in Fig. 24A, but is shown with a specific orientation (i.e., right, horizontal) for purposes of illustration. Direction 826a is defined, therefore, as the same as direction 828. Directions 826b and 826c differ from direction 828 by leftward and
10 rightward displacements of one pixel.

It has been determined experimentally that slightly more than 50% of chain codes 824 correspond to forward direction 826a, and slightly less than 25% of chain codes 824 correspond to each of directions 826b and 826c.

Function block 836 represents an inquiry as to whether the next adjacent
15 pixel in the contour conforms to one of directions 826. Whenever the next adjacent pixel in the contour conforms to one of directions 826, function block 836 proceeds to function block 838, and otherwise proceeds to function block 840.

Function block 838 indicates that the next adjacent pixel is assigned a chain code 824 corresponding to its direction 826 relative to the direction 828 along which
20 the adjacent preceding pair of pixels are aligned.

Function block 840 indicates that a pixel sequence conforming to one of directions 826 is substituted for the actual nonconformal pixel sequence. Based upon experimentation, it has been determined that such substitutions typically will arise in fewer than 0.2% of pixel sequences in a contour and may be accommodated
25 by one of six special-case modifications.

FIG. 25C is a diagrammatic representation of the six special-case modifications 842 for converting non-conformal pixel sequences to pixel sequences that conform to directions 826. Within each modification 842, a pixel sequence 844 is converted to a pixel sequence 846. In each of pixel sequences 844 of adjacent
30 respective pixels X^1 , X^2 , A, B, the direction between pixels A and B does not conform to one of directions 826 due to the alignment of pixel A relative to the

alignment of pixels X^1 and X^2 .

In pixel sequence 844a, initial pixel alignments 850a and 852a represent a nonconformal right-angle direction change. Accordingly, in pixel sequence 846a, pixel A of pixel sequence 844a is omitted, resulting in a pixel direction 854a that
5 conforms to pixel direction 826a. Pixel sequence modifications 842b-842f similarly convert nonconformal pixel sequences 844b-844f to conformal sequences 846b-846f, respectively.

Pixel sequence modifications 842 omit pixels that cause pixel direction alignments that change by 90° or more relative to the alignments of adjacent
10 preceding pixels $X1$ and $X2$. One effect is to increase the minimum radius of curvature of a contour representing a right angle to three pixels. Pixel modifications 842 cause, therefore, a minor loss of extremely fine contour detail. According to this invention, however, it has been determined that the loss of such details is acceptable under most viewing conditions.

15 Function block 860 represents an inquiry as to whether there is another pixel in the contour to be assigned a chain code. Whenever there is another pixel in the contour to be assigned a chain code, function block returns to function block 836, and otherwise proceeds to function block 862.

Function block 862 indicates that nonconformal pixel alignment directions
20 introduced or incurred by the process of function block 840 are removed. In a preferred embodiment, the nonconformal direction changes may be omitted simply by returning to function block 816 and repeating process 810 until no nonconformed pixel sequences remain, which typically is achieved in fewer than 8 iterations. In an alternative embodiment, such incurred nonconformal direction changes may be
25 corrected in "real-time" by checking for and correcting any incurred nonconformal direction changes each time a nonconformal direction change is modified.

Function block 864 indicates that a Huffman code is generated from the resulting simplified chain code. With chain codes 824a-824c corresponding to directions 826A-826C that occur for about 50%, 25% and 25% of pixels in a
30 contour, respective Huffman codes of 0, 11, and 10 are assigned. Such first order Huffman codes allow chain process 810 to represent contours at a bit rate of less

than 1.5 bits per pixel in the contour. Such a bitrate represents approximately a 50% compression ratio improvement over conventional chain code processes.

It will be appreciated that higher order Huffman coding can provide higher compression ratios. Higher order Huffman coding includes, for example, assigning
5 predetermined values to preselected sequences of first order Huffman codes.

SPRITE GENERATION

The present invention includes generating sprites for use in connection with encoding determinate motion video (movie). Bitmaps are accreted into bitmap series that comprise a plurality of sequential bitmaps of sequential images from an image
10 source. Accretion is used to overcome the problem of occluded pixels where objects or figures move relative to one another or where one figure occludes another similar to the way a foreground figure occludes the background. For example, when a foreground figure moves and reveals some new background, there is no way to build that new background from a previous bitmap unless the previous bitmap was first
15 enhanced by including in it the pixels that were going to be uncovered in the subsequent bitmap. This method takes an incomplete image of a figure and looks forward in time to find any pixels that belong to the image but are not to be immediately visible. Those pixels are used to create a composite bitmap for the figure. With the composite bitmap, any future view of the figure can be created by
20 distorting the composite bitmap.

The encoding process begins by an operator identifying the figures and the parts of the figures of a current bitmap from a current bitmap series. Feature or distortion points are selected by the operator on the features of the parts about which the parts of the figures move. A current grid of triangles is superimposed onto the
25 parts of the current bitmap. The triangles that constitute the current grid of triangles are formed by connecting adjacent distortion points. The distortion points are the vertices of the triangles. The current location of each triangle on the current bitmap is determined and stored to the storage device. A portion of data of the current bitmap that defines the first image within the current location of each triangle is
30 retained for further use.

A succeeding bitmap that defines a second image of the current bitmap series

is received from the image source, and the figures and the parts of the figure are identified by the operator. Next, the current grid of triangles from the current bitmap is superimposed onto the succeeding bitmap. The distortion points of current grid of triangles are realigned to coincide with the features of the corresponding
5 figures on the succeeding bitmap. The realigned distortion points form a succeeding grid of triangles on the succeeding bitmap of the second image. The succeeding location of each triangle on the succeeding bitmap is determined and stored to the storage device. A portion of data of the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained for further use.

10 The process of determining and storing the current and succeeding locations of each triangle is repeated for the plurality of sequential bitmaps of the current bitmap series. When that process is completed, an average image of each triangle in the current bitmap series is determined from the separately retained data. The average image of each triangle is stored to the storage device.

15 During playback, the average image of each triangle of the current bitmap series and the current location of each triangle of the current bitmap are retrieved from the storage device. A predicted bitmap is generated by calculating a transformation solution for transforming the average image of each triangle in the current bitmap series to the current location of each triangle of the current bitmap
20 and applying the transformation solution to the average image of each triangle. The predicted bitmap is passed to the monitor for display.

In connection with a playback determinate motion video (video game) in which the images are determined by a controlling program at playback, a sprite bitmap is stored in its entirety on a storage device. The sprite bitmap comprises a
25 plurality of data bits that define a sprite image. The sprite bitmap is displayed on a monitor, and the parts of the sprite are identified by an operator and distortion points are selected for the sprite's parts.

A grid of triangles is superimposed onto the parts of the sprite bitmap. The triangles that constitute the grid of triangles are formed by connecting adjacent
30 distortion points. The distortion points are the vertices of the triangles. The location of each triangle of the sprite bitmap is determined and stored to the storage

device.

During playback, a succeeding location of each triangle is received from a controlling program. The sprite bitmap and the succeeding location of each triangle on the sprite bitmap are recalled from the storage device and passed to the display processor. The succeeding location of each triangle is also passed to the display processor.

A transformation solution is calculated for each triangle on the sprite bitmap. A succeeding bitmap is then generated in the display processor by applying the transformation solution of each triangle derived from the sprite bitmap the defines the sprite image within the location of each triangle. The display processor passes the succeeding sprite bitmap to a monitor for display. This process is repeated for each succeeding location of each triangle requested by the controlling program.

As shown in Fig. 26, an encoding procedure for a movie motion video begins at step 900 by the CPU 22 receiving from an image source a current bitmap series. The current bitmap series comprises a plurality of sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a plurality of data bits which define a first image from the image source. The first image comprises at least one figure having at least one part.

Proceeding to step 902, the first image is displayed to the operator on the monitor 28. From the monitor 28, the figures of the first image on the current bitmap are identified by the operator. The parts of the figure on the current bitmap are then identified by the operator at step 904.

Next, at step 906, the operator selects feature or distortion points on the current bitmap. The distortion points are selected so that the distortion points coincide with features on the bitmap where relative movement of a part is likely to occur. It will be understood by those skilled in the art that the figures, the parts of the figures and the distortion points on a bitmap may be identified by the computer system 20 or by assistance from it. It is preferred, however, that the operator identify the figures, the parts of the figures and the distortion points on a bitmap.

Proceeding to step 908, a current grid of triangles is superimposed onto the parts of the current bitmap by the computer system 20. With reference to Fig. 27A.

the current grid comprises triangles formed by connecting adjacent distortion points. The distortion points form the vertices of the triangles. More specifically, the first image of the current bit map comprises a figure, which is a person 970. The person 970 has six parts corresponding to a head 972, a torso 974, a right arm 976, a left arm 978, right leg 980, and a left leg 982. Distortion points are selected on each part of the person 970 so that the distortion points coincide with features where relative movement of a part is likely to occur. A current grid is superimposed over each part with the triangles of each current grid formed by connecting adjacent distortion points. Thus, the distortion points form the vertices of the triangles.

At step 910, the computer system 20 determines a current location of each triangle on the current bitmap. The current location of each triangle on the current bitmap is defined by the location of the distortion points that form the vertices of the triangle. At step 912, the current location of each triangle is stored to the storage device. A portion of data derived from the current bitmap that defines the first image within the current location of each triangle is retained at step 914.

Next, at step 916, a succeeding bitmap of the current bitmap series is received by the CPU 22. The succeeding bitmap comprises a plurality of data bits which define a second image of the current bitmap series. The second image may or may not include figures that correspond to the figures in the first image. For the following steps, the second image is assumed to have figures that corresponds to the figures in the first image. At step 918, the current grid of triangles is superimposed onto the succeeding bitmap. The second image with the superimposed triangular grid is displayed to the operator on the monitor 28.

At step 920, the distortion points are realigned to coincide with corresponding features on the succeeding bitmap by the operator with assistance from the computer system 20. The computer system 20 realigns the distortion using block matching. Any mistakes are corrected by the operator. With reference to Fig. 27B, the realigned distortion points form a succeeding grid of triangles. The realigned distortion points are the vertices of the triangles. More specifically, the second image of the succeeding bitmap of person 200 includes head 972, torso 974, right arm 976, left arm 978, right leg 980, and left leg 982. In the second image,

however, the right arm 980 is raised. The current grids of the first image have been superimposed over each part and their distortion points realigned to coincide with corresponding features on the second image. The realigned distortion points define succeeding grids of triangles. The succeeding grids comprise triangles formed by connecting the realigned distortion points. Thus, the realigned distortion point form the vertices of the triangles of the succeeding grids.

Proceeding to step 922, a succeeding location of each triangle of the succeeding bitmap is determined by the computer system 20. At step 924, the succeeding location of each triangle on the succeeding bitmap is stored the storage device. A portion of data derived from the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained at step 926. Step 926 leads to decisional step 928 where it is determined if a next succeeding bitmap exists.

If a next succeeding bitmap exists, the YES branch of decisional step 928 leads to step 930 where the succeeding bitmap becomes the current bitmap. Step 930 returns to step 916 where a succeeding bitmap of the current bitmap series is received by the CPU 22. If a next succeeding bitmap does not exist, the NO branch of decisional step 928 leads to step 932 where an average image for each triangle of the current bitmap series is determined. The average image is the median value of the pixels of a triangle. Use of the average image makes the process less susceptible to degeneration. Proceeding to step 934, the average image of each triangle of the current bitmap series is stored to the storage device.

Next, at step 936, the current location of each triangle on the current bitmap is retrieved from the storage device. An affine transformation solution for transforming the average image of each triangle to the current location of the triangle on the current bitmap is then calculated by the computer system 20 at step 938. At step 940, a predicted bitmap is generated by applying the transformation solution of the average image of each triangle to the current location of each triangle on the current bitmap. The predicted bitmap is compared with the current bitmap at step 942.

At step 944 a correction bitmap is generated. The corrected bitmap

comprises the data bits of the current bitmap that were not accurately predicted by the predicted bitmap. The corrected bitmap is stored to the storage device at step 948. Step 948 leads to decisional step 950 where it is determined if a succeeding bitmap exists.

5 If a succeeding bitmap exists, the YES branch of decisional step 950 leads to step 952 where the succeeding bitmap becomes the current bitmap. Step 952 returns to step 936 where the current location of each triangle on the current bitmap is retrieved from the storage device. If a next succeeding bitmap does not exist, the NO branch of decisional step 950 leads to decisional step 954 where it is determined
10 if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, encoding is finished and the NO branch of decisional step 954 leads to step 956. If a succeeding bitmap series exists, the YES branch of decisional step 954 leads to step 958 where the CPU 22 receives the succeeding bitmap series as the current
15 bitmap series. Step 956 returns to step 902 where the figures of the first image of the current bitmap series is identified by the operator.

The process of Fig. 26 describes generation of a sprite or master object 90 for use by encoder process 64 of Fig. 3. The process of utilizing master object 90 to form predicted objects 102 is described with reference to Fig. 28.

20 As shown in Fig. 28, the procedure begins at step 1000 with a current bitmap series being retrieved. The current bitmap series comprises a plurality of sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a plurality of data bits which define a first image from the image source. The first image comprises at least one figure having at least one part.

25 At step 1002, the average image of each triangle of the current bitmap series is retrieved from the storage device. The average image of each triangle is then passed to a display processor (not shown) at step 704. It will be appreciated that computer system 20 (Fig. 1) can optionally include a display processor or other dedicated components for executing for processes of this invention. Proceeding to step 1006, the current location of each triangle on the current bitmap is retrieved
30 from the storage device. The current location of each triangle is passed to the display processor at step 1008.

Next, an affine transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap is calculated by the display processor at step 1010. Proceeding to step 1012, a predicted bitmap is generated by the display processor by applying the
5 transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap.

At step 1014, a correction bitmap for the current bitmap is retrieved from the storage device. The correction bitmap is passed to the display processor at step 716. A display bitmap is then generated in the display processor by overlaying the
10 predicted bitmap with the correction bitmap. The display processor retains a copy of the average image of each triangle and passes the display bitmap to the frame buffer for display on the monitor.

Next, at decisional step 1020, it is determined if a succeeding bitmap of the current bitmap series exists. If a succeeding bitmap of the current bitmap series
15 exists, the YES branch of decisional step 1020 leads to step 1022. At step 1022, the succeeding bitmap becomes the current bitmap. Step 1022 returns to step 1006 where the location of each triangle on the current bitmap is retrieved from the storage device.

Returning to decisional step 1020, if a succeeding bitmap of the current
20 bitmap series does not exist, the NO branch of decisional step 1020 leads to decisional step 1024. At decisional step 1024, it is determined if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, then the process is finished and the NO branch of decisional step 1024 leads to step 1026. If a
25 succeeding bitmap series exists, the YES branch of decisional step 1024 leads to step 1028. At step 1028, the succeeding bitmap series becomes the current bitmap series. Step 1028 returns to step 1000.

Having illustrated and described the principles of the present invention in a preferred embodiment, it should be apparent to those skilled in the art that the embodiment can be modified in arrangement and detail without departing from such
30 principles. Accordingly, we claim as our invention all such embodiments as come within the scope and spirit of the following claims and equivalents thereto.

WE CLAIM:

1. A method of encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an arbitrary image feature with an arbitrary configuration, the arbitrary image feature
5 having different attributes in the first and second video image frames, the method comprising:

determining a dense motion transformation between the arbitrary image feature in the first and second video image frames to determine an estimated arbitrary image feature in the second video image frame; and

- 10 identifying a difference between the estimated arbitrary image feature in the second video image frame and the arbitrary image feature in the second video image frame to determine a transform error for the arbitrary image feature.

2. The method of claim 1 in which the arbitrary image feature includes as attributes a position, an orientation, and a configuration in the each of the first and
15 second video image frames and the difference between the attributes of the arbitrary image feature in the first and second video image frames includes a difference in at least one of the position, orientation, or configuration.

3. The method of claim 1 further comprising applying the transform error to the estimated arbitrary image feature in the second video image frame to form a
20 corrected image feature in the second video image frame.

4. The method of claim 3 in which the video image frame sequence further includes a third video image frame that includes the arbitrary image feature and the method further comprises determining a dense motion transformation between the corrected image feature in the second video image frame and the arbitrary image
25 feature in the third video image frame to determine an estimated arbitrary image feature in the third video image frame.

5. The method of claim 1 in which image features in the video image frame sequence are formed from plural pixels and in which determining the dense motion transformation between the arbitrary image feature in the first and second video
30 image frames includes identifying corresponding pixels of the arbitrary image feature in the first and second video image frames.

6. The method of claim 5 further comprising identifying all corresponding pixels of the arbitrary image feature in the first and second video image frames.

7. The method of claim 1 in which determining the dense motion transformation between the arbitrary image feature in the first and second video image frames includes determining affine motion transformations between the
5 arbitrary image feature in the first and second video image frames.

8. The method of claim 1 in which the first video image frame precedes the second video image frame.

9. The method of claim 1 further comprising encoding the transform error in
10 a first compressed format, decoding the transform error from the first compressed format to form a quantized transform error, and correcting the estimated arbitrary image feature in the second video image according to the quantized transform error.

10. The method of 9 in which the transform error encoded in the first compressed format is a lossy representation of the transform error.

11. The method of claim 9 further comprising encoding in a second
15 compressed format the transform error encoded in the first compressed format.

12. The method of claim 11 in which the first and second compressed formats are, respectively, lossy and lossless compression formats.

13. The method of claim 1 in which the first and second video image frames
20 further include plural other arbitrary image features with arbitrary configurations, at least one of the other arbitrary image features having different attributes in the first and second video image frames, the method further comprising:

determining dense motion transformations between the other arbitrary image features in the first and second video image frames to determine estimated other
25 arbitrary image features in the second video image frame; and

identifying differences between the estimated other arbitrary image features in the second video image frame and the other arbitrary image features in the second video image frame to determine transform errors for the other arbitrary image features.

30 14. A data structure stored on a computer-readable medium and representing in a compressed format information within a video image frame sequence having

plural video image frames that include plural image features that have different attributes in the selected ones of the video image frames, the data structure comprising:

5 selected image feature data corresponding to selected characteristics of the plural image features;

 affine transform coefficient data corresponding to coefficients of affine transformations that represent changes of the plural image features between the selected ones of the video image frames; and

10 transform error data corresponding to errors in the changes of the plural image features represented by the affine transformations.

15 15. The data structure of claim 14 in which at least one the affine transform coefficient data and the transform error data is encoded in a compressed format.

 16. The data structure of claim 14 in which the selected characteristics of the plural image features include binary mask representations of the plural image features.

 17. The data structure of claim 14 in which the selected characteristics of the plural image features include plural selected pixels from each of the plural image features.

20 18. The data structure of claim 14 in which the selected characteristics of the plural image features include sprites that each represent the different attributes of one of the image features in the plural video image frames.

 19. A method of decoding compressed information relating to an arbitrary image feature with an arbitrary configuration within first and second video image frames of a video image frame sequence, the arbitrary image feature having different attributes in the first and second video image frames, the method comprising:

25 applying a dense motion transformation to a representation of the arbitrary image feature in the first video image frame to form an estimated arbitrary image feature in the second video image frame; and

30 applying a transform difference to the estimated arbitrary image feature in the second video image frame to obtain the arbitrary image feature in the second video image frame.

20. The method of claim 19 in which the video image frame sequence further includes a third video image frame that includes the arbitrary image feature and the method further comprises:

5 applying a dense motion transformation to the arbitrary image feature in the second video image frame to form an estimated arbitrary image feature in the third video image frame; and

 applying a transform difference to the estimated arbitrary image feature in the third video image frame to obtain the arbitrary image feature in the third video image frame.

10 21. The method of claim 19 in which image features in the video image frame sequence are formed from plural pixels and in which the dense motion transformation represents correlations between corresponding pixels of the arbitrary image feature in the first and second video image frames.

15 22. The method of claim 19 in which the dense motion transformation includes an affine motion transformation between the arbitrary image feature in the first and second video image frames.

23. The method of claim 19 in which the first video image frame precedes the second video image frame.

20 24. The method of claim 19 in which the first and second video image frames further include plural other arbitrary image features with arbitrary configurations, at least one of the other arbitrary image features having different attributes in the first and second video image frames, the method further comprising:

25 applying dense motion transformations to representations of the other arbitrary image features in the first video image frame to form estimated other arbitrary image features in the second video image frame; and

 applying transform differences to the estimated other arbitrary image features in the second video image frame to obtain the other arbitrary image features in the second video image frame.

30 25. A computer-readable medium storing computer-executable programming for encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an arbitrary image

feature with an arbitrary configuration, the arbitrary image feature having different attributes in the first and second video image frames, the medium comprising:

programming for determining a dense motion transformation between the arbitrary image feature in the first and second video image frames to determine an
5 estimated arbitrary image feature in the second video image frame; and

programming for identifying a difference between the estimated arbitrary image feature in the second video image frame and the arbitrary image feature in the second video image frame to determine a transform error for the arbitrary image feature.

10 26. A computer-readable medium storing computer-executable programming for decoding compressed information relating to an arbitrary image feature with an arbitrary configuration within first and second video image frames of a video image frame sequence, the arbitrary image feature having different attributes in the first and second video image frames, the medium comprising:

15 programming for applying a dense motion transformation to a representation of the arbitrary image feature in the first video image frame to form an estimated arbitrary image feature in the second video image frame; and

programming for applying a transform difference to the estimated arbitrary image feature in the second video image frame to obtain the arbitrary image feature
20 in the second video image frame.

27. A method of encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an image component, the image component having different attributes in the first and second video image frames, the method comprising:

25 determining a motion transformation between the image component in the first and second video image frames to determine an estimated image component in the second video image frame;

identifying a difference between the estimated image component in the second video image frame and the image component in the second video image
30 frame to determine a transform error for the image component;

applying the transform error to the estimated image component in the second

video image frame to form a corrected image component in the second video image frame; and

encoding the corrected image component in a first compressed format.

28. A block matching motion estimation method for estimating motion of
5 corresponding pixels between first and second video image frames, comprising:

defining a reference pixel block of multiple pixels relative to a first reference pixel in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the reference pixel block being a non-quadrilateral polygonal array of pixels;

10 determining and storing for the pixels in the sample pixel block correlations to the pixels in the reference pixel block; and

identifying from the correlations a first sample pixel corresponding to the first reference pixel.

29. The method of claim 1 in which the first reference pixel and the first
15 sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter.

30. The method of claim 29 further comprising:
20 defining relative to the first reference pixel a preliminary quadrilateral reference pixel block of plural pixels;

identifying the pixels of the preliminary quadrilateral pixel block as to whether they are in the interior of the arbitrary first image feature, at least one of the pixels in the preliminary quadrilateral pixel block not being in the interior of the
25 arbitrary first image feature; and

establishing as the reference pixel block the pixels of the preliminary quadrilateral pixel block in the interior of the arbitrary first image feature.

31. The method of claim 29 in which the arbitrary first image feature includes plural image feature pixels, the method further comprising:

30 defining a reference pixel block of multiple pixels relative to each image feature pixel in the first video image frame and defining a corresponding sample

pixel block of multiple sample pixels in the second video image frame, at least one of the reference pixel blocks being a non-quadrilateral polygonal array of pixels;

determining and storing for the pixels in the sample pixel block correlations to the image feature pixel relative to which the corresponding reference pixel block is defined; and

identifying from the correlations selected sample pixels in correlation with the image feature pixels relative to which the corresponding reference pixel blocks are defined.

32. The method of claim 28 in which determining correlations includes determining summed absolute errors between pixels of the sample pixel block and the reference pixel block.

33. The method of claim 32 in which the first sample pixel corresponding to the first reference pixel is the sample pixel for which the summed absolute error between the sample pixel block and the reference pixel block is minimal.

34. The method of claim 32 in which each of the reference and sample pixels is represented by three color component values and the summed absolute errors E are determined as:

$$E = \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} (|r_{ij} - r'_{ij}| + |g_{ij} - g'_{ij}| + |b_{ij} - b'_{ij}|),$$

in which r_{ij} , g_{ij} , and b_{ij} correspond to the color component values representing the reference pixels and r'_{ij} , g'_{ij} , and b'_{ij} correspond to the color component values representing the sample pixels.

35. The method of claim 34 in which the three color component values correspond to red, green, and blue color components.

36. The method of claim 28 in which the first video image frame precedes the second video image frame.

37. A block matching motion estimation method for estimating motion of pixels between first and second video image frames that include an arbitrary first image feature of plural image feature pixels, comprising:

identifying the arbitrary first image feature in the first video image frame; defining a reference pixel block of multiple pixels relative to each image

feature pixel in the first video image frame and a corresponding sample pixel block of multiple sample pixels in the second video image frame;

identifying for each reference pixel block in the first video image frame the pixels of the arbitrary first image feature; and

5 identifying from the sample pixels in the sample pixel block first sample pixels corresponding to the image feature pixels.

38. The method of claim 37 in which the arbitrary first image feature has an interior that is bounded by an image feature perimeter, the method further comprising:

10 defining relative to each image feature pixel a preliminary quadrilateral reference pixel block of plural pixels;

identifying the pixels of the preliminary quadrilateral reference pixel block as to whether they are in the interior of the arbitrary first image feature; and

15 establishing as the reference pixel block the pixels of the preliminary quadrilateral reference pixel block in the interior of the arbitrary first image feature.

39. The method of claim 38 in which at least one of the pixels in the preliminary quadrilateral pixel block is not in the interior of the arbitrary first image feature and the reference pixel block is defined to include a pixel block perimeter that conforms to the image feature perimeter.

20 40. The method of claim 37 in which the reference pixel block is a non-quadrilateral polygonal array of pixels.

41. A computer-readable medium storing computer-executable programming for estimating motion of corresponding pixels between first and second video image frames, the medium comprising:

25 programming for defining a reference pixel block of multiple pixels relative to a first reference pixel in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the reference pixel block being a non-quadrilateral polygonal array of pixels;

30 programming for determining and storing for the pixels in the sample pixel block correlations to the reference pixel block and the first reference pixel; and programming for identifying from the correlations a first sample pixel

corresponding to the first reference pixel.

42. The medium of claim 41 in which the first reference pixel and the first sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter, the medium further comprising:

programming for defining relative to the first reference pixel a preliminary quadrilateral reference pixel block of plural pixels;

10 programming for identifying the pixels of the preliminary quadrilateral pixel block as to whether they are in the interior of the arbitrary first image feature, at least one of the pixels in the preliminary quadrilateral pixel block not being in the interior of the arbitrary first image feature; and

programming for establishing as the reference pixel block the pixels of the preliminary quadrilateral pixel block in the interior of the arbitrary first image feature.

43. The medium of claim 41 in which the first reference pixel and the first sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having plural image feature pixels in an interior that is bounded by an image feature perimeter, the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter, the medium further comprising:

programming for defining a reference pixel block of multiple pixels relative to each image feature pixel in the first video image frame and defining a corresponding sample pixel block of multiple sample pixels in the second video image frame, at least one of the reference pixel blocks being a non-quadrilateral polygonal array of pixels;

programming for determining and storing for the pixels in the sample pixel block a correlation to the image feature pixel relative to which the corresponding reference pixel block is defined; and

programming for identifying from the correlations a selected sample pixel in

correlation with the image feature pixel relative to which the corresponding reference pixel block is defined.

44. A block matching motion estimation method for estimating motion of corresponding pixels between first and second video image frames, comprising:

- 5 defining first and second reference pixel blocks of multiple pixels relative to respective first and second reference pixels in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the first reference, second reference, and sample pixel blocks including plural respective first reference, second reference, and sample subsets of multiple pixels;
- 10 determining and storing first correlations between the sample subsets and the first reference subsets;
 determining and storing second correlations between the sample subsets and the second reference subsets, wherein at least one of the second correlations matches one of the first correlations and determining the at least one of the second
- 15 correlations includes retrieving the matching one of the first correlations; and
 identifying from the first and second correlations first and second sample pixels corresponding to the first and second reference pixels, respectively.
- 20 45. The method of claim 44 in which the pixels of the first and second video image frames are arranged as regular arrays of pixels and the first and second reference subsets are commonly aligned segments of the regular arrays.
- 25 46. The method of claim 44 in which the pixels of the first and second video image frames are arranged as regular arrays of rows and columns of pixels and the first and second reference subsets are portions of columns of the regular arrays.
- 30 47. The method of claim 44 in which the first and second correlations include multiple correlation components and a selected one of the second correlations matches a selected first correlation and includes fewer than all the correlation components of the selected first correlation, the method further comprising:
 retrieving the selected first correlation; and
 conforming the selected first correlation to the selected second correlation.

48. The method of claim 47 in which the selected second correlation includes a new correlation component not included in the selected first correlation and conforming the selected first correlation includes incorporating into it the new correlation component.

5 49. The method of claim 47 in which the selected second correlation includes a new correlation component not included in the selected first correlation and the selected first correlation includes a prior correlation component not included in the selected second correlation, wherein conforming the selected first correlation includes omitting the prior correlation component from and incorporating the new
10 correlation component in the selected first correlation.

50. The method of claim 44 in which at least one of the first and second reference pixel blocks is a non-quadrilateral polygonal array of pixels.

51. The method of claim 44 in which the first reference pixel and the first sample pixel are included an arbitrary first image feature in the first and second
15 video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the first reference pixel block including a pixel block perimeter that conforms to the image feature perimeter.

52. The method of claim 44 in which determining correlations includes determining mean absolute errors between the sample and reference subsets of
20 multiple pixels.

53. In a block matching motion estimation method for estimating motion of corresponding pixels between first and second video image frames, a method of determining correlations between plural reference pixel blocks of multiple pixels and a sample pixel block of multiple sample pixels in the second video image frame,
25 each reference pixel block being relative to a reference pixel in the first video image frame, comprising:

defining within the reference and sample pixel blocks respective reference and sample subsets of multiple pixels;

determining and storing correlations between the sample and reference
30 subsets; and

identifying from the correlations first sample pixels corresponding to the

reference pixels.

54. The method of claim 53 in which first and second correlations are determined between the sample subsets and the reference subsets of preceding reference pixel blocks and subsequent reference pixel blocks, respectively.

5 55. The method of claim 54 in which at least one of the second correlations matches one of the first correlations and determining the at least one of the second correlations includes retrieving the matching one of the first correlations.

56. The method of claim 54 in which the first and second correlations include multiple correlation components and a selected second correlation includes
10 fewer than all the correlation components of a selected first correlation that matches the selected second correlation, the method further comprising:

retrieving the selected first correlation; and

conforming the selected first correlation to the selected second correlation.

57. The method of claim 56 in which the selected second correlation
15 includes a new correlation component not included in the selected first correlation and conforming the selected first correlation includes incorporating into it the new correlation component.

58. The method of claim 56 in which the selected second correlation includes a new correlation component not included in the selected first correlation
20 and the selected first correlation includes a prior correlation component not included in the selected second correlation, wherein conforming the selected first correlation includes omitting the prior correlation component from and incorporating the new correlation component in the selected first correlation.

59. A computer-readable medium storing computer-executable programming
25 for estimating motion of corresponding pixels between first and second video image frames, the medium comprising:

programming for defining within the reference and sample pixel blocks respective reference and sample subsets of multiple pixels;

programming for determining and storing correlations between the sample
30 and reference subsets; and

programming for identifying from the correlations first sample pixels

corresponding to the reference pixels.

60. The medium of claim 59 further comprising programming for determining first and second correlations between the sample subsets and the reference subsets of preceding reference pixel blocks and subsequent reference pixel blocks, respectively.

61. The medium of claim 60 further comprising programming for determining that a selected second correlation matches a selected first correlation and programming for determining the selected second correlation with retrieval of the matching selected first correlation.

62. The medium of claim 60 in which the first and second correlations have multiple correlation components and a selected second correlation has fewer than all the correlation components of the matching one of the first correlations, the medium further comprising:

programming for retrieving the matching one of the first correlations; and
programming for conforming the matching one of the first correlations to the at least one of the second correlations.

63. A data structure stored on a computer-readable medium and representing an estimation of motion of corresponding pixels between first and second video image frames, the first video image frame including first and second reference pixels relative to which respective first and second reference pixel blocks are defined, and the second video image frame including a sample pixel block of multiple sample pixels, comprising:

reference and sample pixel block subset data representing multiple pixel subsets of the reference and sample pixel blocks; and
subset correlation data representing correlations between the multiple pixel subsets of the reference and sample pixel blocks.

64. A precompression video transformation method of transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including the plural

feature pixels and plural non-feature pixels, the method comprising:

defining the image component of predetermined configuration about the image feature and identifying the non-feature pixels;

identifying plural non-feature pixel sets each of plural adjacent non-feature pixels and including at least one non-feature pixel adjacent a feature pixel of the feature boundary; and

assigning to the non-feature pixels in each non-feature pixel set a pixel value that includes the pixel value of the feature pixel of the feature boundary adjacent the at least one of the non-feature pixels in the non-feature pixel set.

65. The method of claim 64 in which the image component includes non-feature pixels other than the ones in the plural non-feature pixel sets, the method further comprising:

identifying as unassigned pixels the non-feature pixels in the image component not included in the non-feature pixel sets;

identifying pairs of non-feature pixel sets adjacent the unassigned pixels; and assigning to unassigned pixels pixel values that include the pixel values of the adjacent pairs of non-feature pixels sets.

66. The method of claim 64 in which the feature and non-feature pixels of the image component are arranged as an array of rows and columns of pixels and the non-feature pixel sets include a row and a column of non-feature pixels.

67. The method of claim 64 in which selected pairs of non-feature pixel sets include common non-feature pixels and the common non-feature pixels include the pixel values assigned to the non-feature pixels of both non-feature pixel sets.

68. The method of claim 67 in which the common non-feature pixels are assigned pixel values that include averages of the pixel values assigned to the non-feature pixels of both non-feature pixel sets.

69. The method of claim 64 in which non-feature pixels in at least one of the non-feature pixel sets are assigned the pixel value of the adjacent feature pixel of the feature boundary.

70. The method of claim 64 in which non-feature pixels in one non-feature pixel set are assigned the pixel value of the feature pixel of the feature boundary

adjacent the at least one of the non-feature pixels in the non-feature pixel set.

71. A precompression video transformation method of transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed
5 format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including the plural feature pixels and plural non-feature pixels, the method comprising:

assigning to each of the non-feature pixels of the image component a pixel value that includes the pixel value of a feature pixel of the feature boundary.

10 72. The method of claim 71 in which selected non-feature pixels in the image component are assigned pixel values of plural feature pixels of the feature boundary.

73. The method of claim 72 in which the selected non-feature pixels are assigned pixel values that include an average of the pixel values of plural feature
15 pixels of the feature boundary.

74. The method of claim 71 in which non-feature pixels in the image component are assigned the pixel values of feature pixels of the feature boundary.

75. The method of claim 71 in which the feature and non-feature pixels of the image component are arranged as an array of rows and columns of pixels, the
20 method further comprising:

identifying selected non-feature pixels of the image component that are in rows or columns with feature pixels of the feature boundary; and

assigning to the selected non-feature pixels pixel values that include the pixel values of the feature pixels of the feature boundary.

25 76. A computer-readable medium storing computer-executable programming for transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including
30 the plural feature pixels and plural non-feature pixels, the medium comprising:

programming for assigning to each of the non-feature pixels of the image

component a pixel value that includes the pixel value of a feature pixel of the feature boundary.

77. The medium of claim 15 further comprising programming for assigning to selected non-feature pixels in the image component pixel values of plural feature
5 pixels of the feature boundary.

78. A data structure stored on a computer-readable medium and representing a precompression extrapolation of an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration, the arbitrary image feature and feature boundary including plural feature pixels with
10 associated pixel values and the image component including the plural feature pixels and plural non-feature pixels, the data structure comprising:


image feature data representing the arbitrary image feature and the feature boundary of arbitrary configuration and including pixel values of pixels in the feature boundary;

15 image component data representing the image component of predetermined configuration about the image feature; and

non-feature pixel data representing the non-feature pixels with pixel values that include value that includes the pixel value of the pixel values of the pixels in the feature boundary.

20 79. The data structure of claim 78 in which the non-feature pixel data includes pixel values that represent non-feature pixels with pixel values that are the same as pixel values of pixels in the feature boundary.

80. The data structure of claim 78 in which the non-feature pixel data includes pixel values that represent non-feature pixels with pixel values that are
25 averages of pixel values of pixels in the feature boundary.

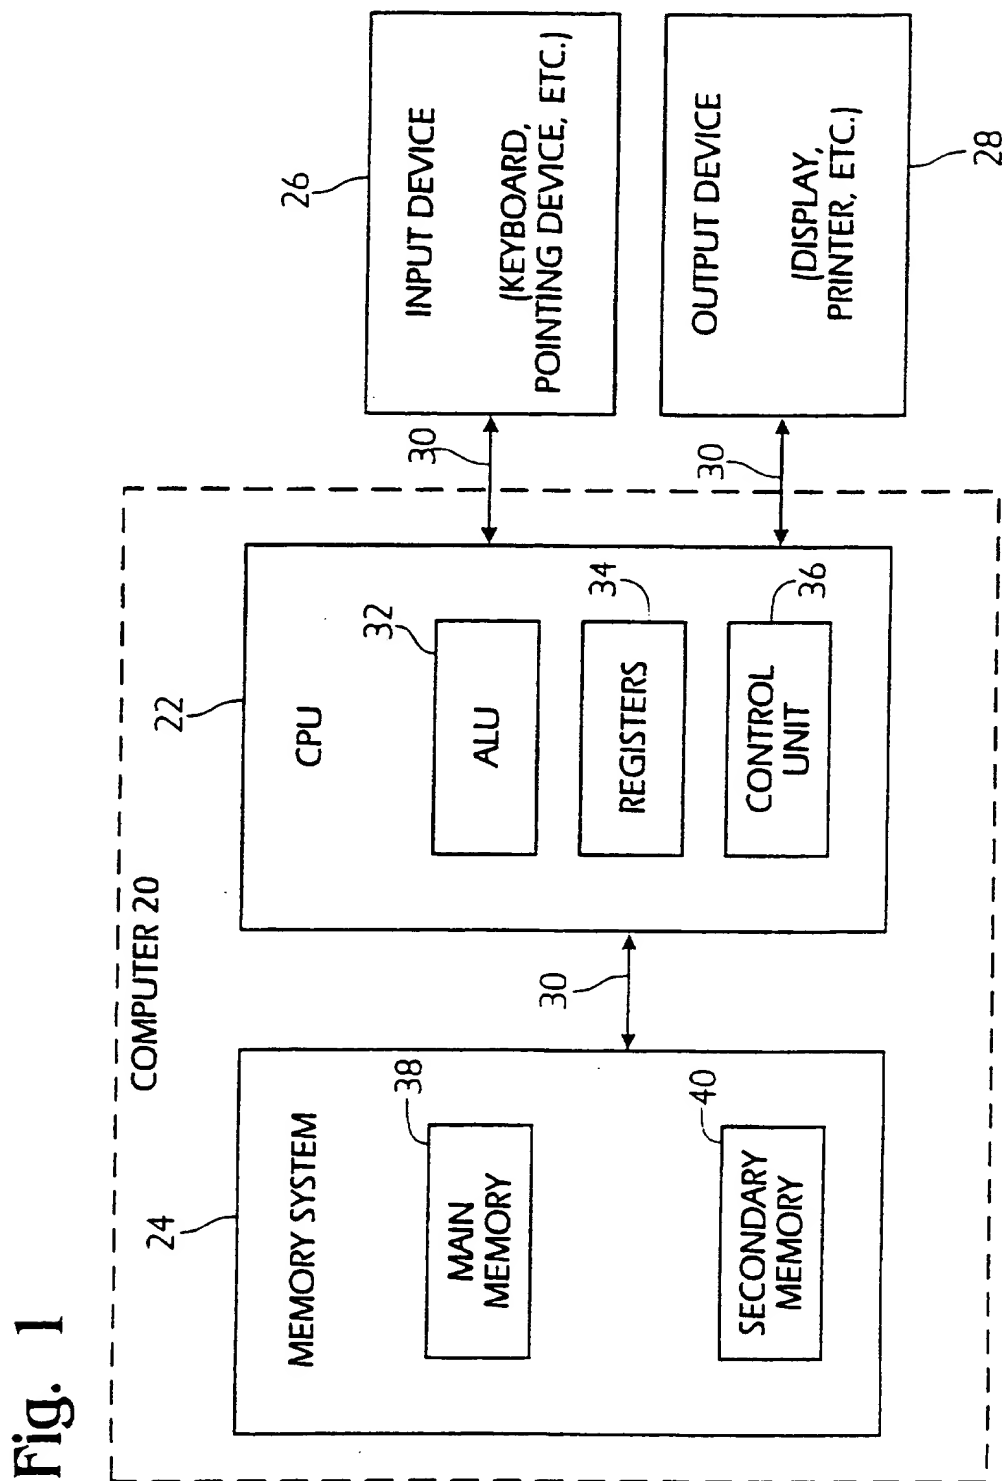

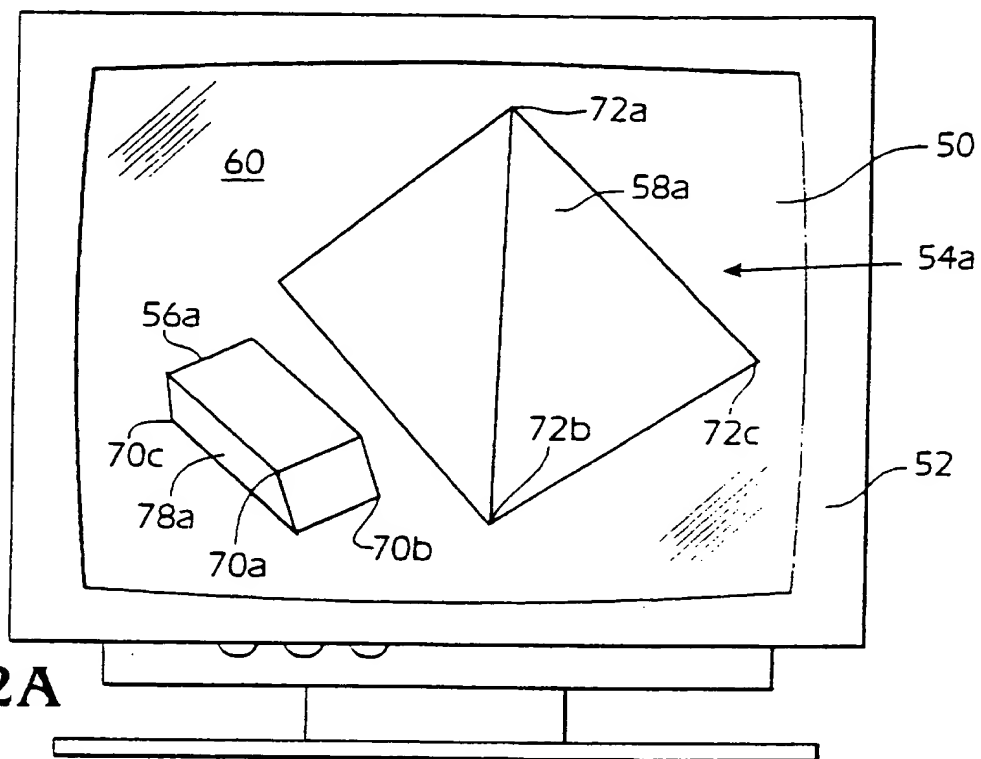


Fig. 2A

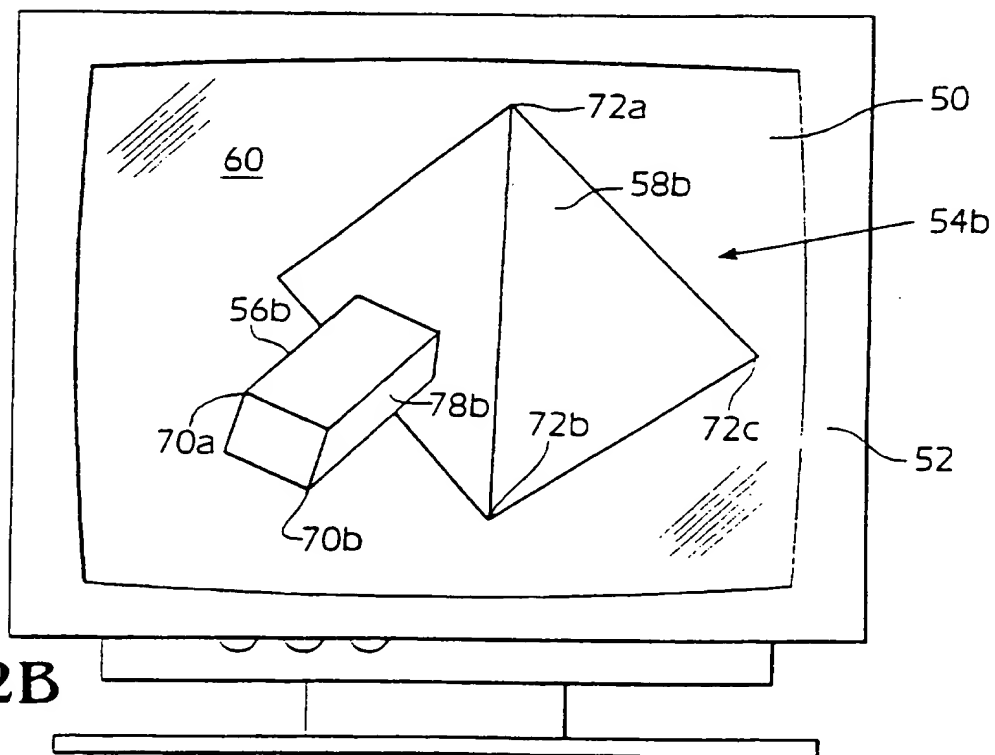


Fig. 2B

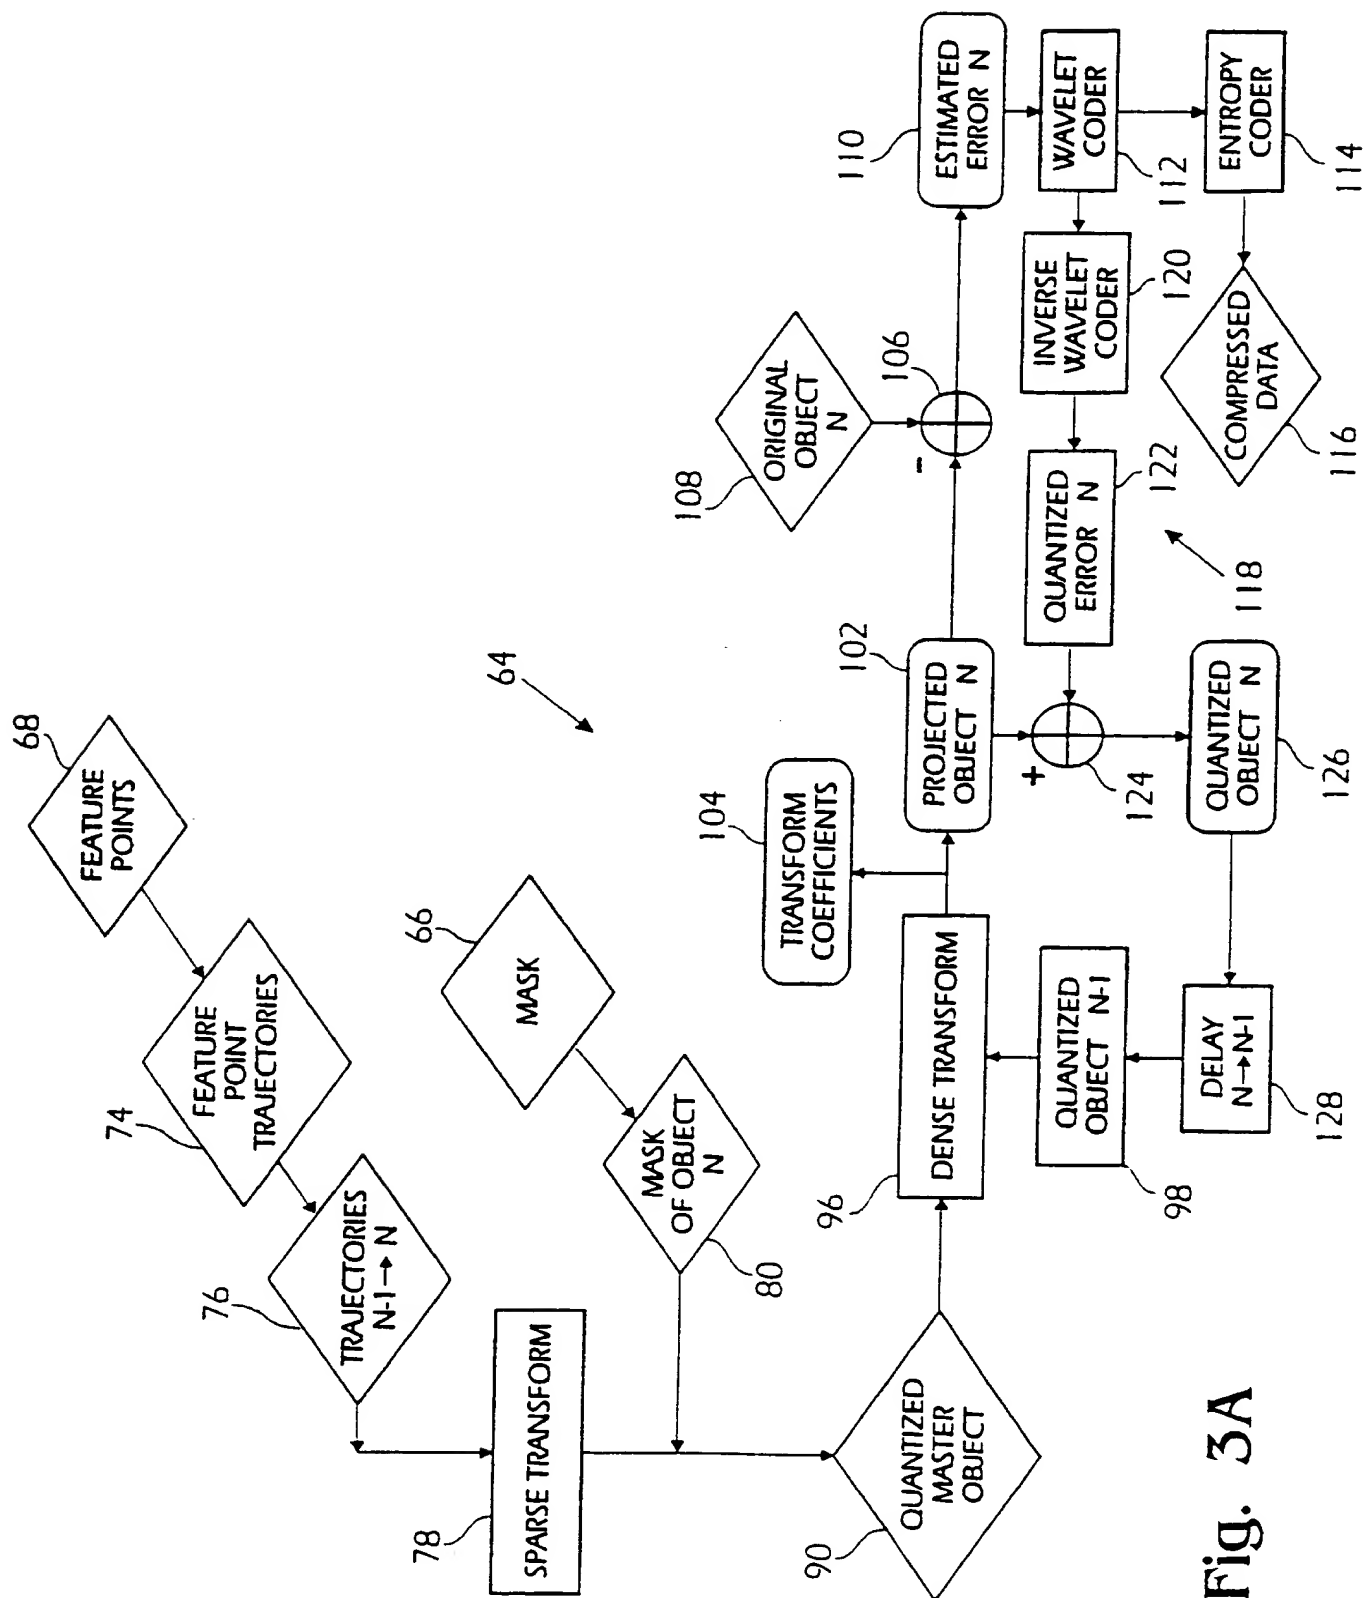


Fig. 3A

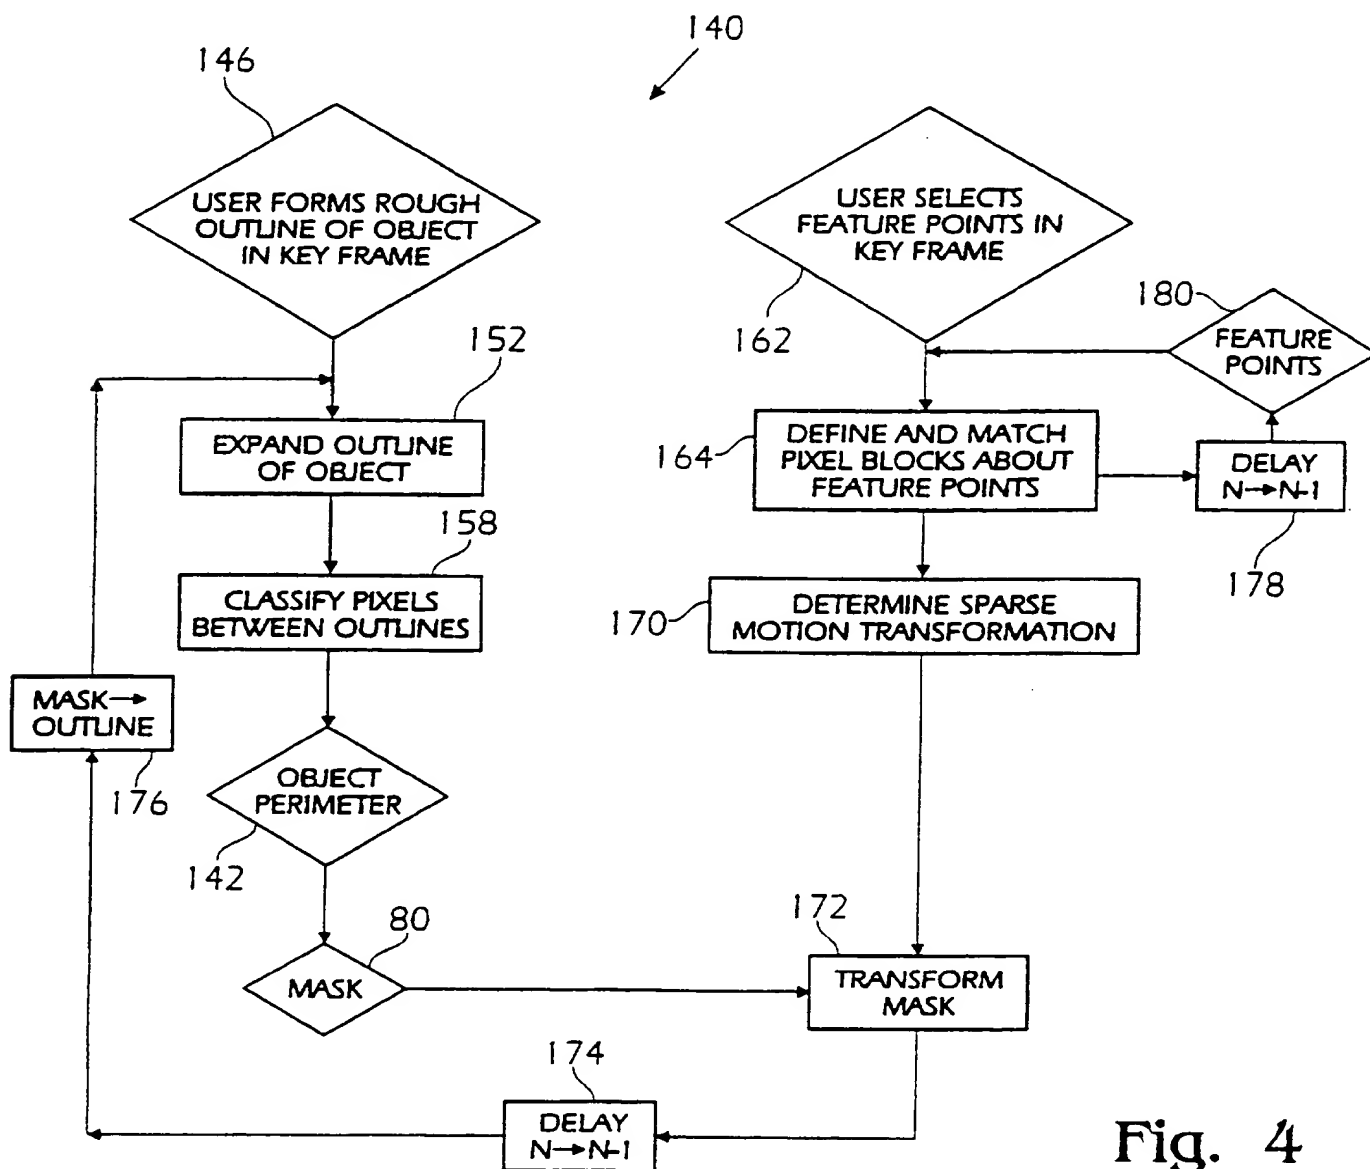


Fig. 4

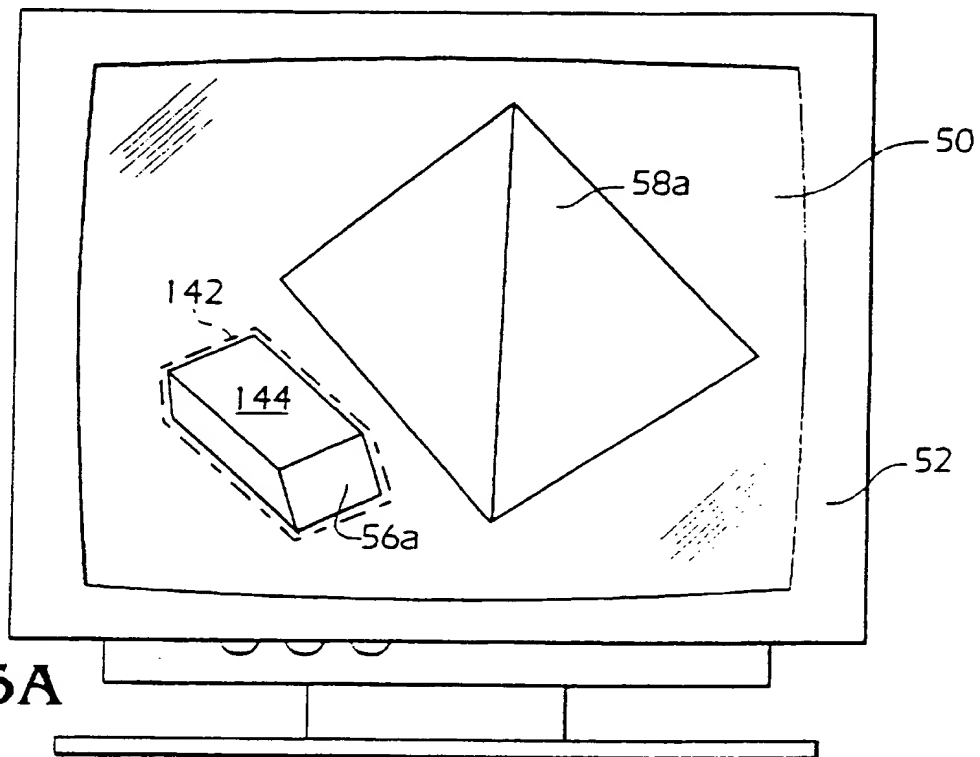


Fig. 5A

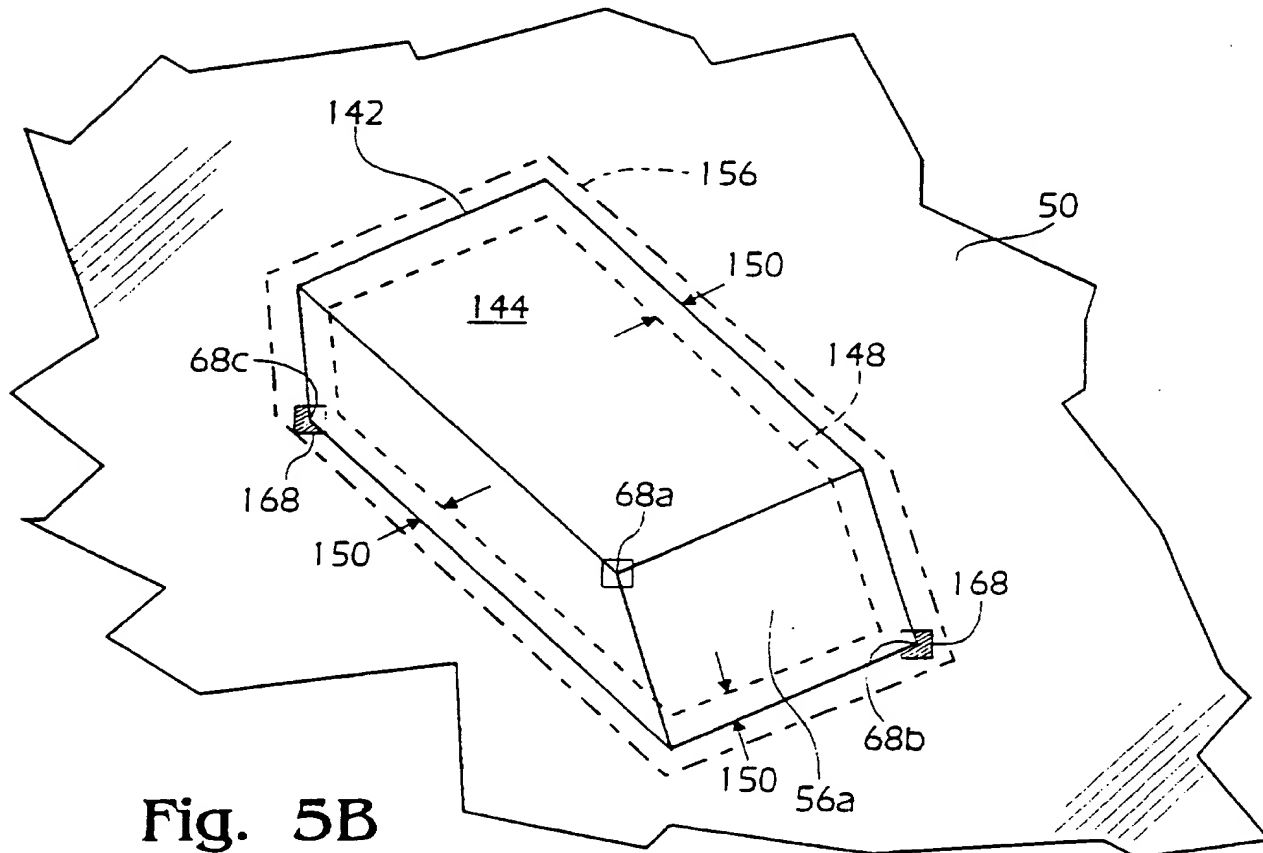


Fig. 5B

6/30

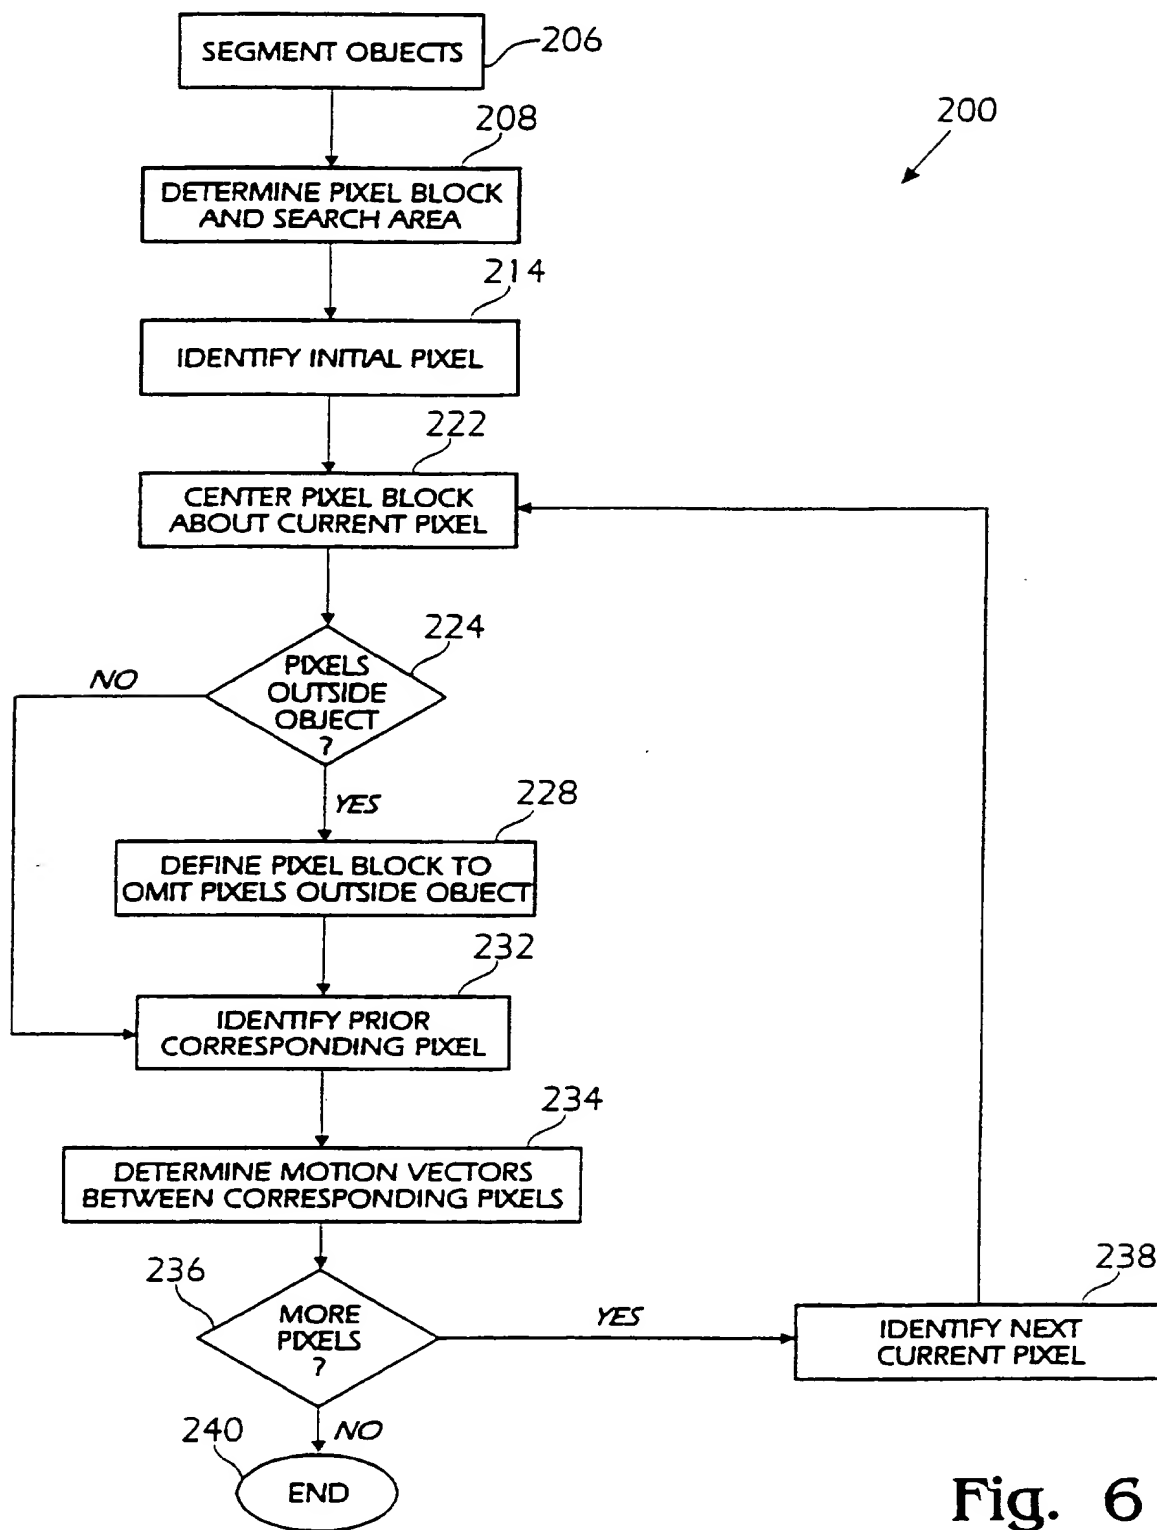


Fig. 6

7/30

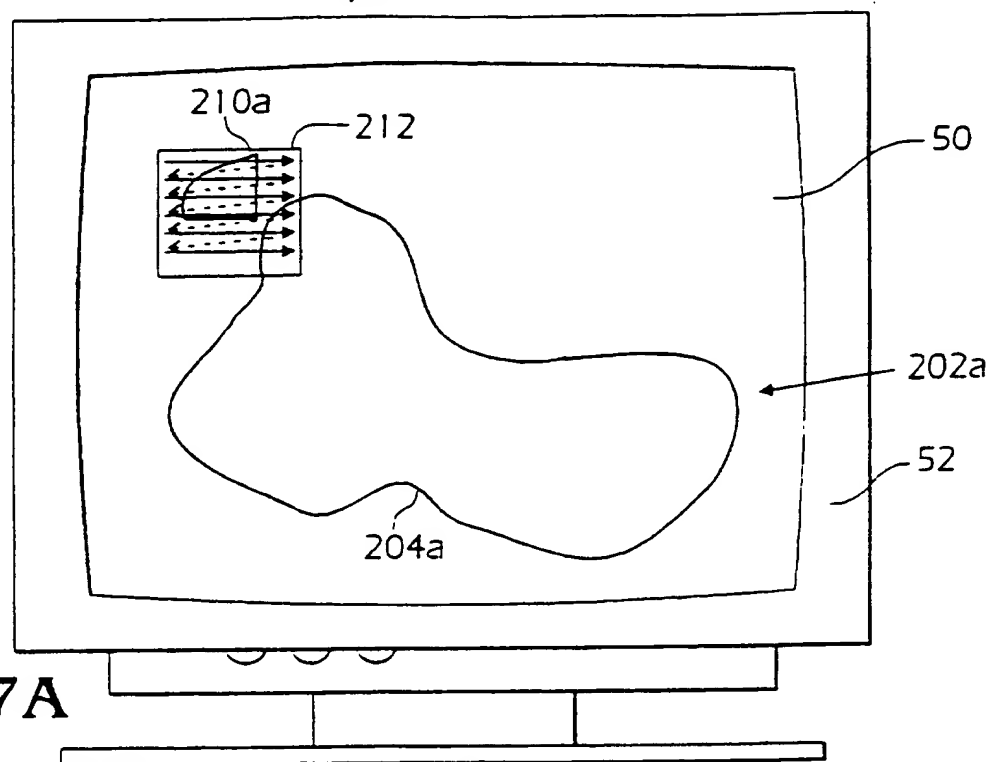


Fig. 7A

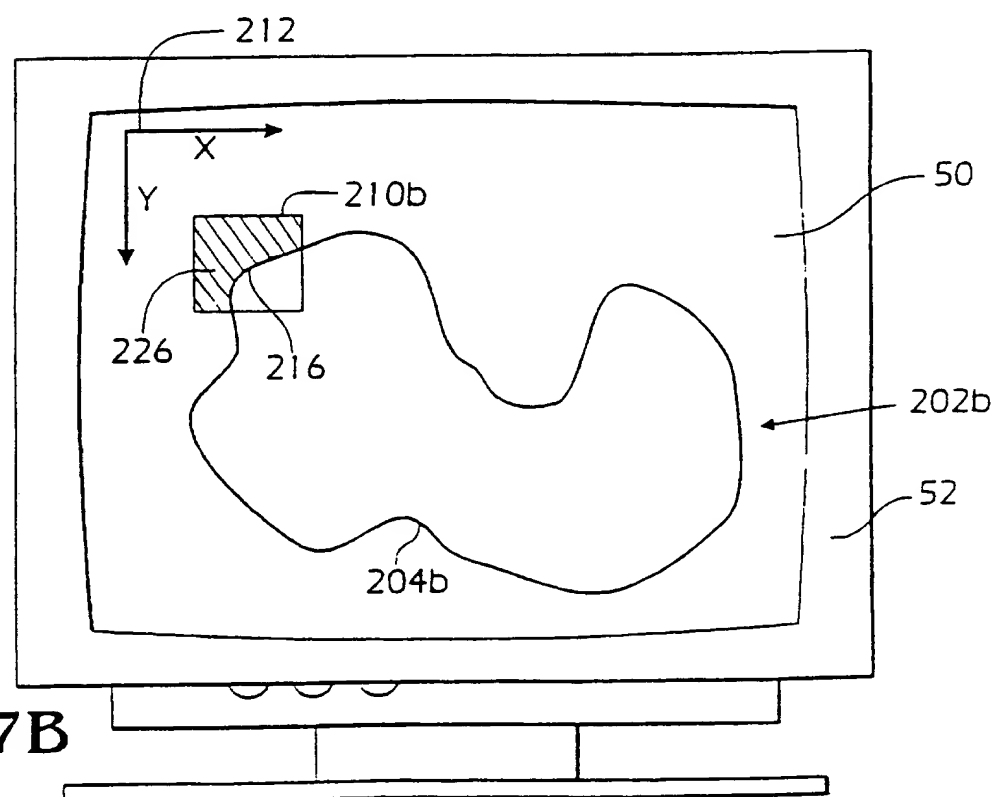


Fig. 7B


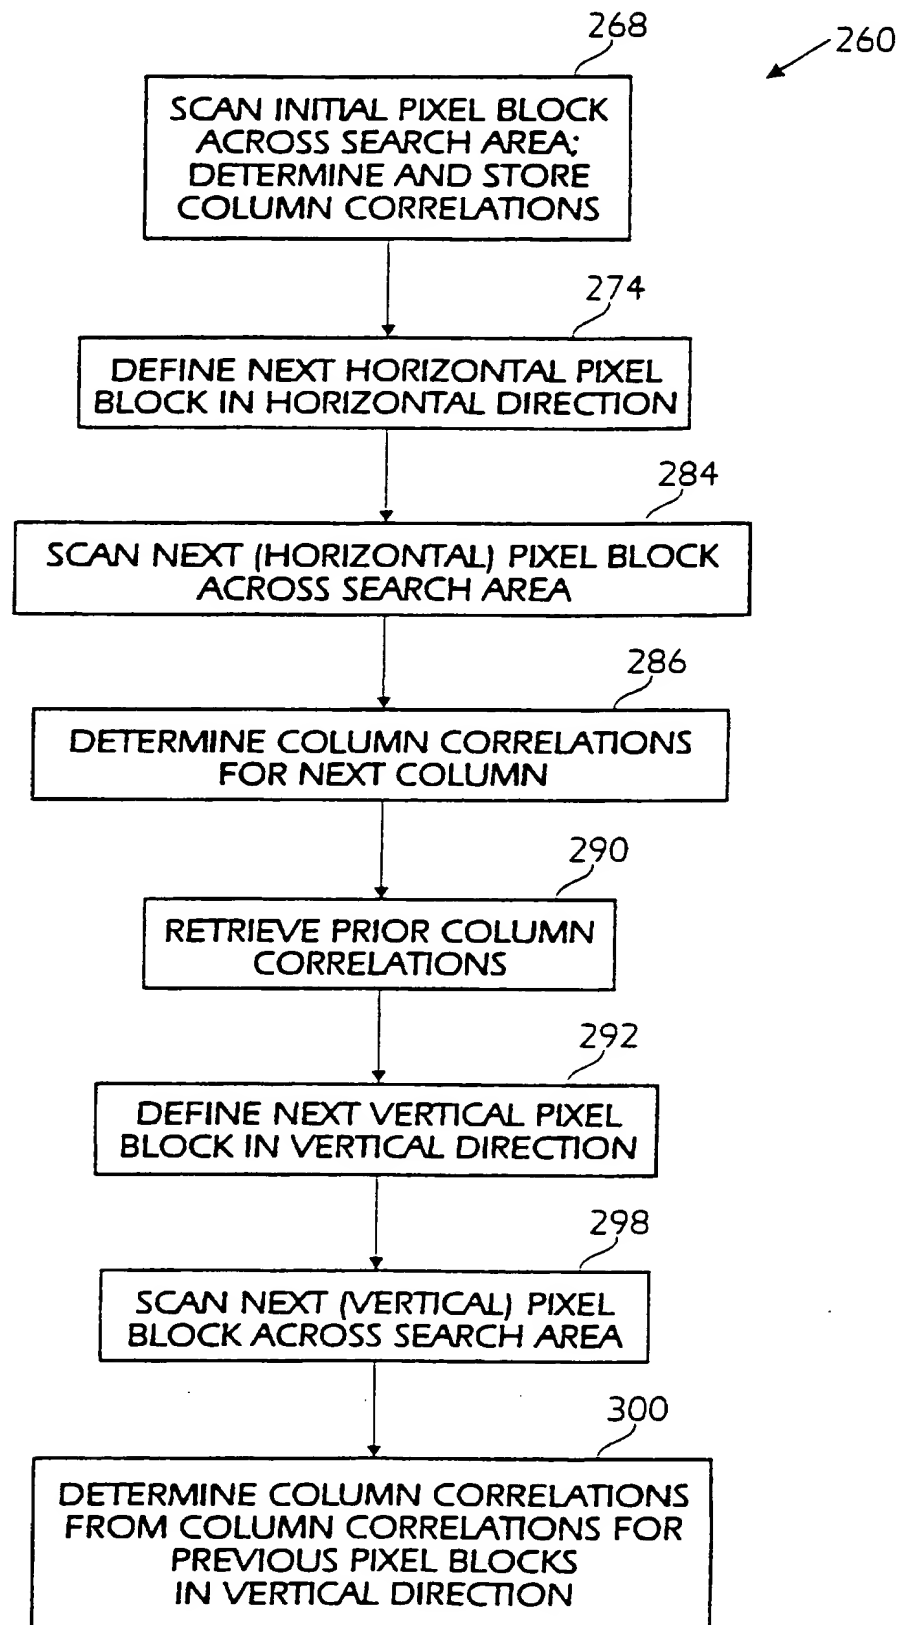


Fig. 8

9/30

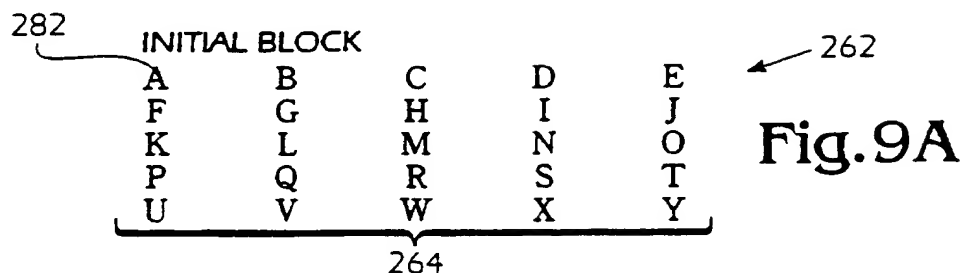

OBJECT

01	02	03	04	05	06	07	08	09	00	...
12	13	14	15	16	17	18	19	10	11	...
23	24	25	26	27	28	29	20	21	22	...
34	35	36	37	38	39	30	31	32	33	...
45	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig. 9B

INITIAL BLOCK SCANNING OBJECT (Step 1)

270(1)

01E	02	03	04	05	06	07	08	09	00	...
12J	13	14	15	16	17	18	19	10	11	...
23O	24	25	26	27	28	29	20	21	22	...
34T	35	36	37	38	39	30	31	32	33	...
45Y	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig. 9C

INITIAL BLOCK SCANNING OBJECT (Step 2)

270(2) 270(3)

01D	02E	03	04	05	06	07	08	09	00	...
12I	13J	14	15	16	17	18	19	10	11	...
23N	24O	25	26	27	28	29	20	21	22	...
34S	35T	36	37	38	39	30	31	32	33	...
45X	46Y	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig. 9D

10/30

INITIAL BLOCK SCANNING OBJECT (Step 5)

270(4)	270(5)	270(6)	270(7)	270(8)	06	07	08	09	00	...
01A	02B	03C	04D	05E	17	18	19	10	11	...
12F	13G	14H	15I	16J	28	29	20	21	22	...
23K	24L	25M	26N	27O	39	30	31	32	33	...
34P	35Q	36R	37S	38T	40	41	42	43	44	...
45U	46V	47W	48X	49Y	51	52	53	54	55	...
56	57	58	59	60	61	62	63	64	65	...
67	68	69	70	71	72	73	74	75	76	...
78	79	80	81	82	83	84	85	86	87	...
89	90	91	92	93	94	95	96	97	98	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 9E

INITIAL BLOCK SCANNING OBJECT (Step 6)

	270(9)	270(10)	270(11)	270(12)	270(13)				
01	02A	03B	04C	05D	06E	07	08	09	00
12	13F	14G	15H	16I	17J	18	19	10	11
23	24K	25L	26M	27N	28O	29	20	21	22
34	35P	36Q	37R	38S	39T	30	31	32	33
45	46U	47V	48W	49X	40Y	41	42	43	44
56	57	58	59	50	51	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99


Fig. 9F

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

270(14)	270(15)	270(16)	270(17)	270(18)	06	07	08	09	00	...
01	02	03	04	05	17	18	19	10	11	...
12A	13B	14C	15D	16E	28	29	20	21	22	...
23F	24G	25H	26I	27J	39	30	31	32	33	...
34K	35L	36M	37N	38O	40	41	42	43	44	...
45P	46Q	47R	48S	49T	51	52	53	54	55	...
56U	57V	58W	59X	50Y	62	63	64	65	66	...
67	68	69	70	71	72	73	74	75	76	...
78	79	80	81	82	83	84	85	86	87	...
89	90	91	92	93	94	95	96	97	98	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 9G

11/30

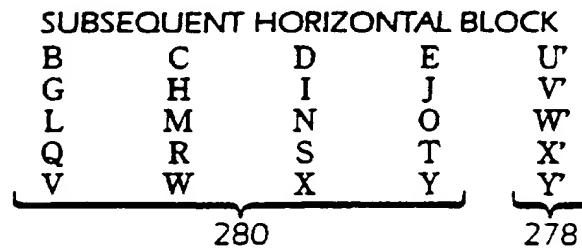

276
Fig. 10A

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 1)

288(1)									
01 U'	02	03	04	05	06	07	08	09	00 ...
12 V'	13	14	15	16	17	18	19	10	11 ...
23 W'	24	25	26	27	28	29	20	21	22 ...
34 X'	35	36	37	38	39	30	31	32	33 ...
45 Y'	46	47	48	49	40	41	42	43	44 ...
56	57	58	59	50	51	52	53	54	55 ...
67	68	69	60	61	62	63	64	65	66 ...
78	79	70	71	72	73	74	75	76	77 ...
89	80	81	82	83	84	85	86	87	88 ...
90	91	92	93	94	95	96	97	98	99 ...

Fig. 10B

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 2)

270'(1) 288(2)									
01 E	02 U'	03	04	05	06	07	08	09	00 ...
12 J	13 V'	14	15	16	17	18	19	10	11 ...
23 O	24 W'	25	26	27	28	29	20	21	22 ...
34 T	35 X'	36	37	38	39	30	31	32	33 ...
45 Y	46 Y'	47	48	49	40	41	42	43	44 ...
56	57	58	59	50	51	52	53	54	55 ...
67	68	69	60	61	62	63	64	65	66 ...
78	79	70	71	72	73	74	75	76	77 ...
89	80	81	82	83	84	85	86	87	88 ...
90	91	92	93	94	95	96	97	98	99 ...

Fig. 10C

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 3)

270'(2) 270'(3) 288(3)									
01 D	02 E	03 U'	04	05	06	07	08	09	00 ...
12 I	13 J	14 V'	15	16	17	18	19	10	11 ...
23 N	24 O	25 W'	26	27	28	29	20	21	22 ...
34 S	35 T	36 X'	37	38	39	30	31	32	33 ...
45 X	46 Y	47 Y'	48	49	40	41	42	43	44 ...
56	57	58	59	50	51	52	53	54	55 ...
67	68	69	60	61	62	63	64	65	66 ...
78	79	70	71	72	73	74	75	76	77 ...
89	80	81	82	83	84	85	86	87	88 ...
90	91	92	93	94	95	96	97	98	99 ...

Fig. 10D

12/30

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 6)

	270'(5)	270'(6)	270'(7)	270'(8)	288(4)					
01	02 B	03 C	04 D	05 E	06 U'	07	08	09	00	...
12	13 G	14 H	15 I	16 J	17 V'	18	19	10	11	...
23	24 L	25 M	26 N	27 O	28 W'	29	20	21	22	...
34	35 Q	36 R	37 S	38 T	39 X'	30	31	32	33	...
45	46 V	47 W	48 X	49 Y	40 Y'	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10E

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step Q+6)

	270'(15)	270'(16)	270'(17)	270'(18)	288(5)					
01	02	03	04	05	06	07	08	09	00	...
12	13 B	14 C	15 D	16 E	17 U'	18	19	10	11	...
23	24 G	25 H	26 I	27 J	28 V'	29	20	21	22	...
34	35 L	36 M	37 N	38 O	39 W'	30	31	32	33	...
45	46 Q	47 R	48 S	49 T	40 X'	41	42	43	44	...
56	57 V	58 W	59 X	50 Y	51 Y'	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10F

13/30

SUBSEQUENT VERTICAL BLOCK

F	G	H	I	J
K	L	M	N	O
P	Q	R	S	T
U	V	W	X	Y
A'	B'	C'	D'	E'

296

294

Fig. 11A

INITIAL BLOCK SCANNING OBJECT (Step Q+1)

01	02	03	04	05	06	07	08	09	00	...
12 J	13	14	15	16	17	18	19	10	11	...
23 O	24	25	26	27	28	29	20	21	22	...
34 T	35	36	37	38	39	30	31	32	33	...
45 Y	46	47	48	49	40	41	42	43	44	...
56 E'	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 11B

INITIAL BLOCK SCANNING OBJECT (Step Q+2)

01	02	03	04	05	06	07	08	09	00	...
12 I	13 J	14	15	16	17	18	19	10	11	...
23 N	24 O	25	26	27	28	29	20	21	22	...
34 S	35 T	36	37	38	39	30	31	32	33	...
45 X	46 Y	47	48	49	40	41	42	43	44	...
56 D'	57 E'	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 11C

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

01	02	03	04	05	06	07	08	09	00	...
12 F	13 G	14 H	15 I	16 J	17	18	19	10	11	...
23 K	24 L	25 M	26 N	27 O	28	29	20	21	22	...
34 P	35 Q	36 R	37 S	38 T	39	30	31	32	33	...
45 U	46 V	47 W	48 X	49 Y	40	41	42	43	44	...
56 A'	57 B'	58 C'	59 D'	50 E'	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

304'(4) 304'(5) 304'(6) 304'(7) 304'(8)

Fig. 11D

14/30

INITIAL BLOCK SCANNING OBJECT (Step Q+6)

	302(9)	302(10)	302(11)	302(12)	302(13)					
01	02	03	04	05	06	07	08	09	00	...
12	13 F	14 G	15 H	16 O	17 J	18	19	10	11	...
23	24 K	25 L	26 M	27 N	28 O	29	20	21	22	...
34	35 P	36 Q	37 R	38 S	39 T	30	31	32	33	...
45	46 U	47 V	48 W	49 X	40 Y	41	42	43	44	...
56	57 A'	58 B'	59 C'	50 D'	51 E'	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 11E

INITIAL BLOCK SCANNING OBJECT (Step 2Q+5)

	302(14)	302(15)	302(16)	302(17)	302(18)					
05	02	03	04		06	07	08	09	00	...
18	13	14	15		17	18	19	10	11	...
23 F	24 G	25 H	26 I	J	28	29	20	21	22	...
38 K	35 L	36 M	37 N	O	39	30	31	32	33	...
49 P	46 Q	47 R	48 S	T	40	41	42	43	44	...
58 U	57 V	58 W	59 X	Y	51	52	53	54	55	...
67 A'	68 B'	69 C'	60 D'	E'	62	63	64	65	66	...
78	79	70	71		73	74	75	76	77	...
89	80	81	82		84	85	86	87	88	...
90	91	92	93		95	96	97	98	99	...

Fig. 11F

Fig. 12

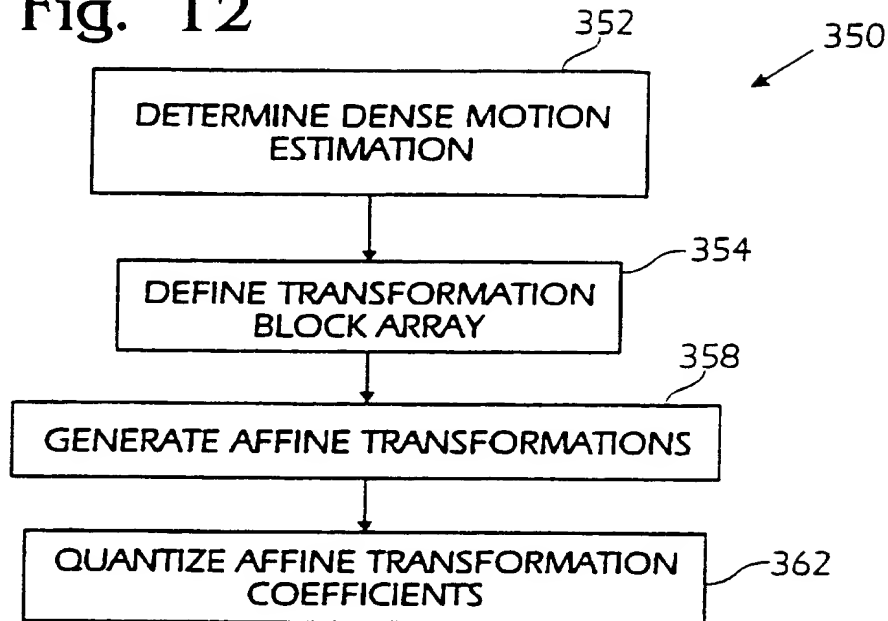
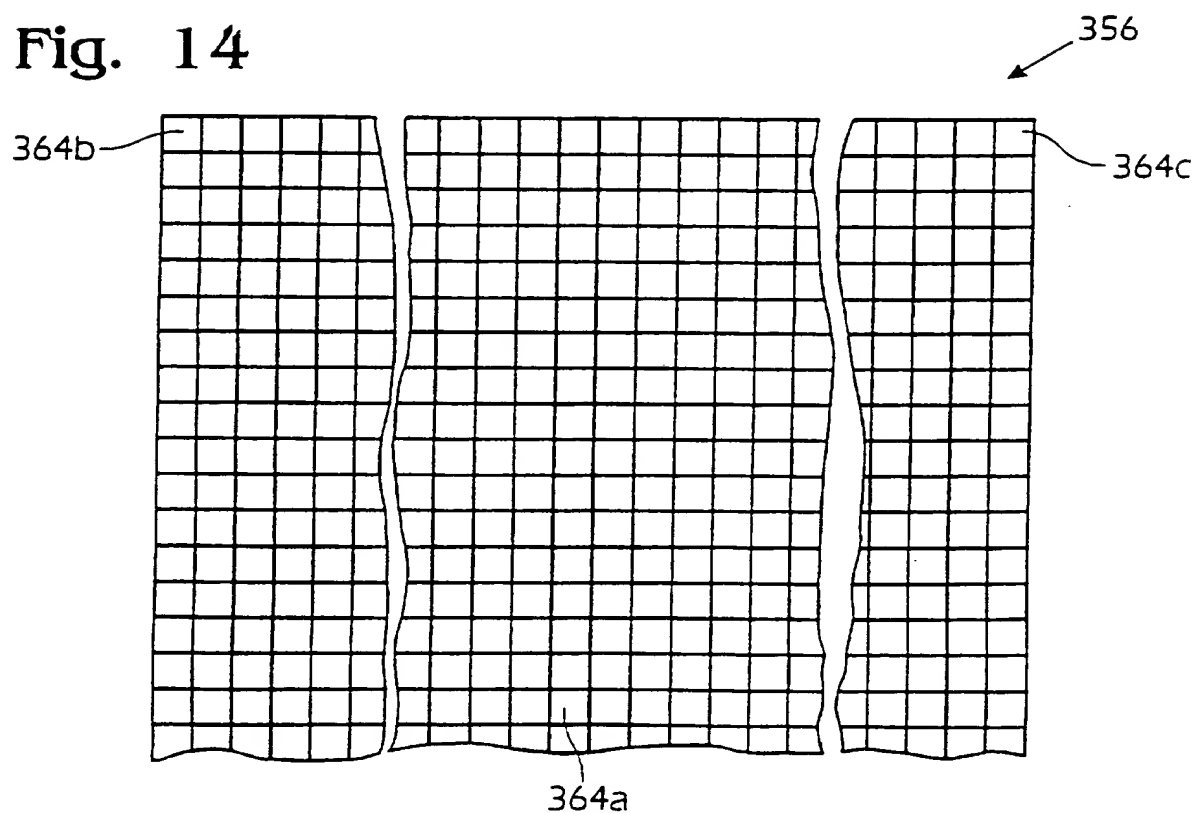


Fig. 14



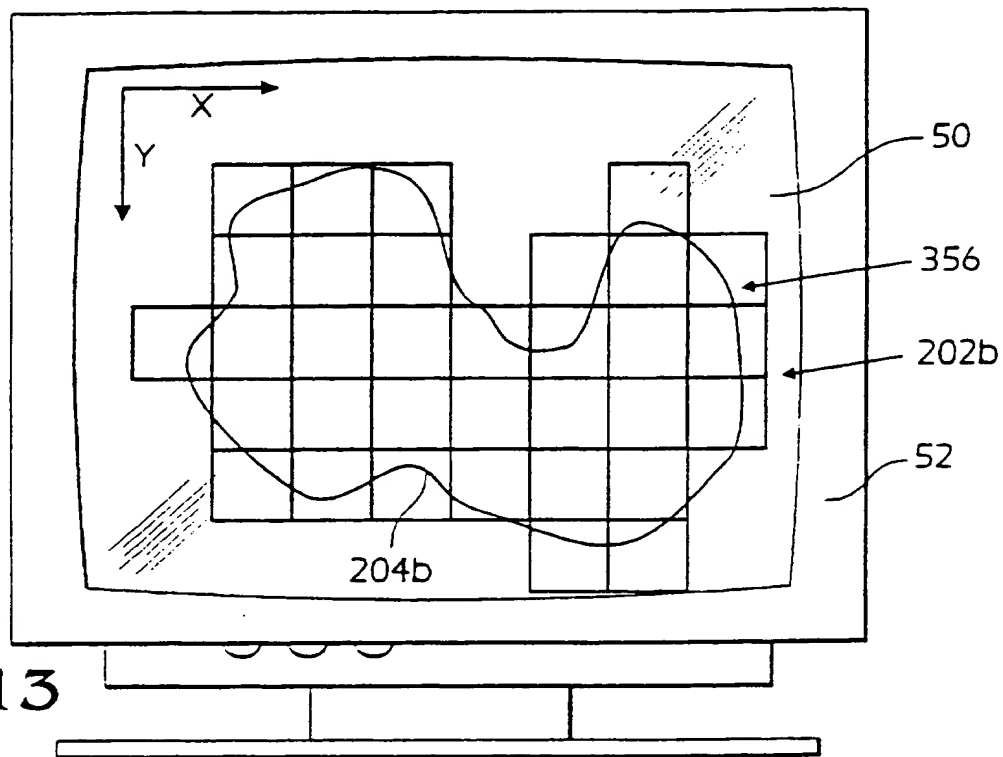


Fig. 13

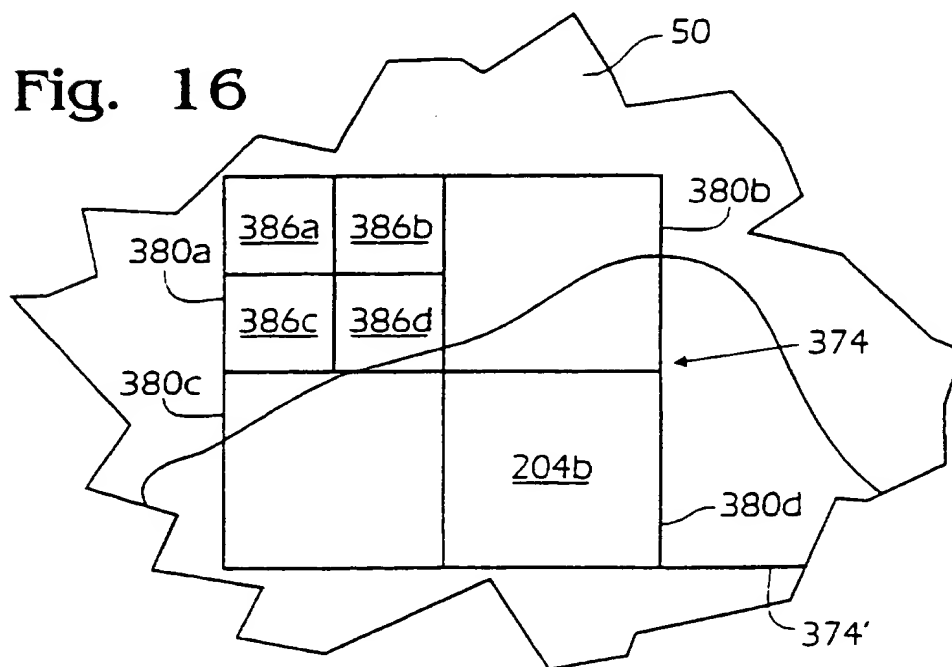


Fig. 16

Fig. 15

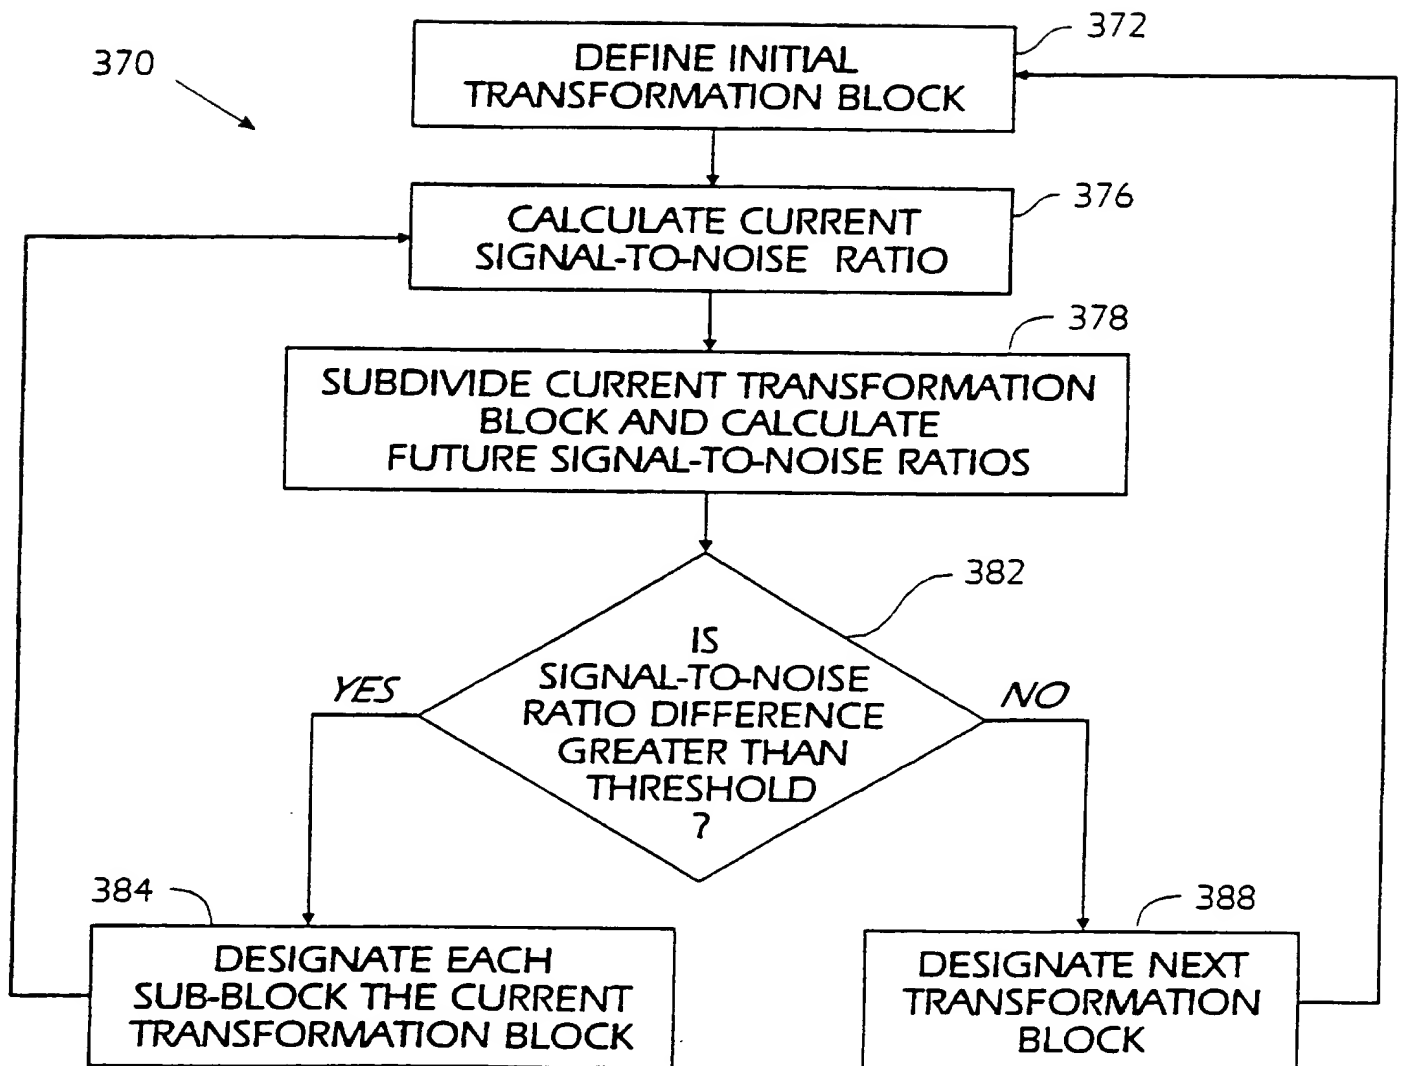
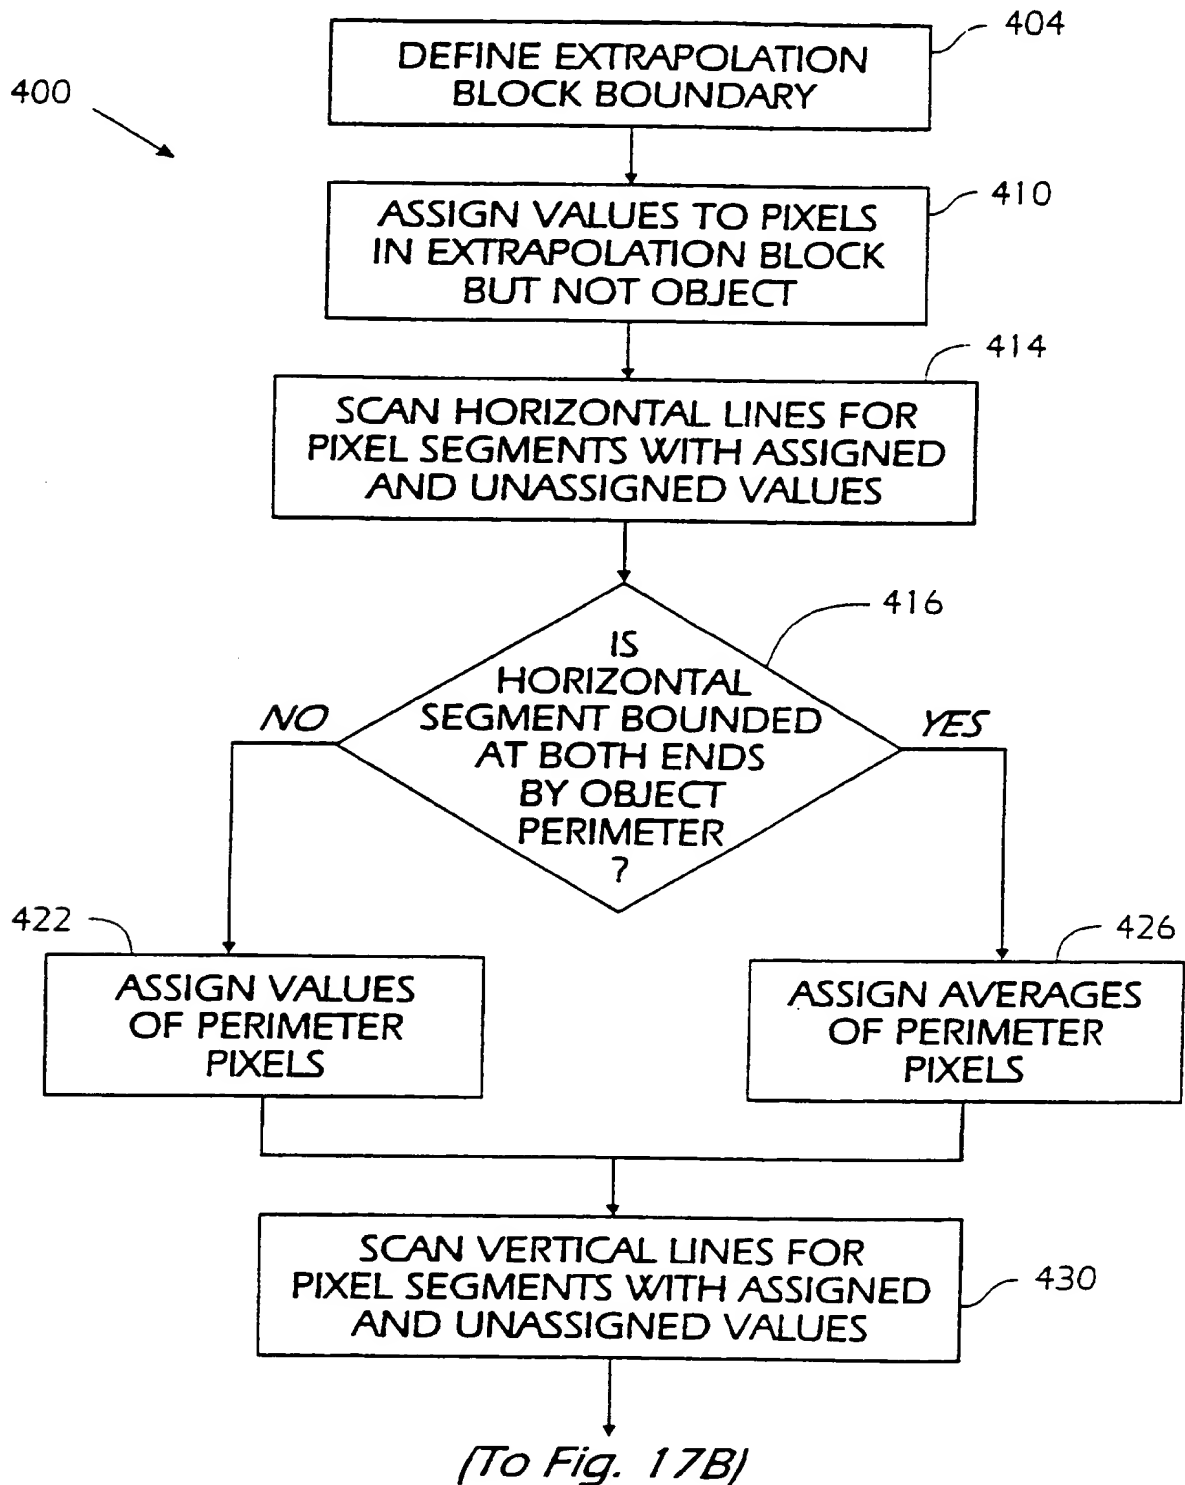


Fig. 17A



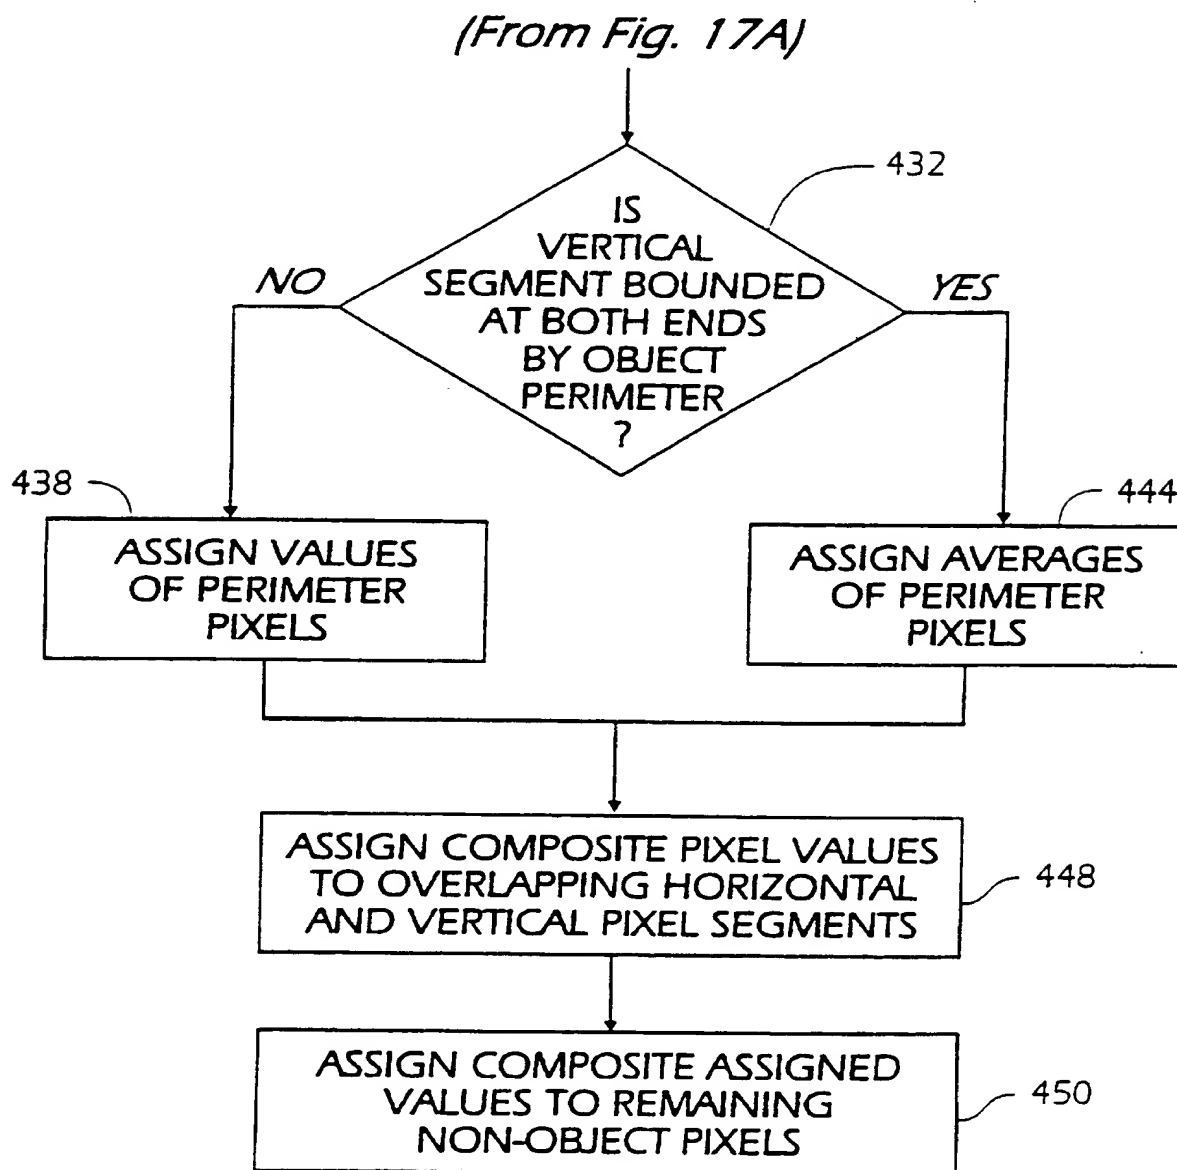


Fig. 17B

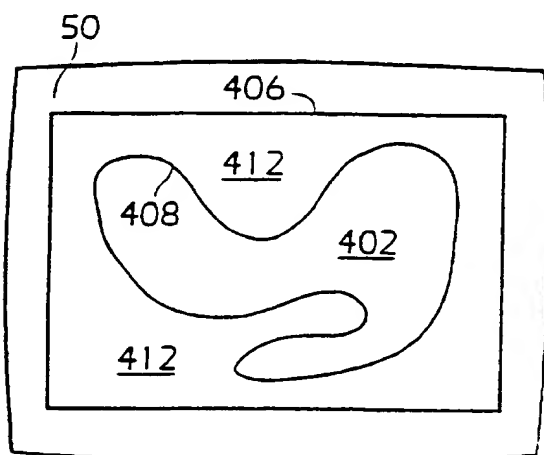


Fig. 18A

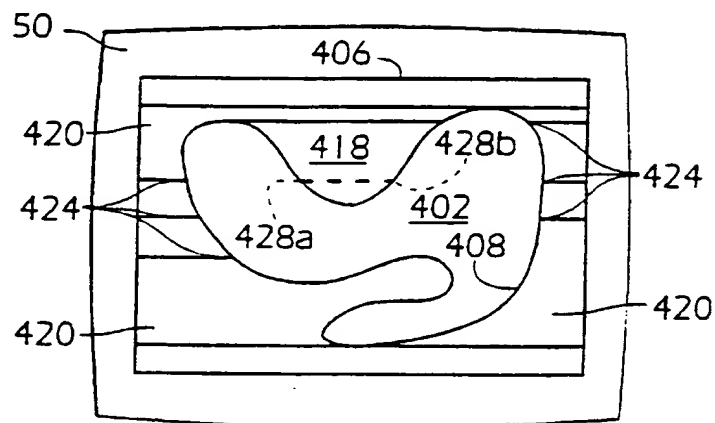


Fig. 18B

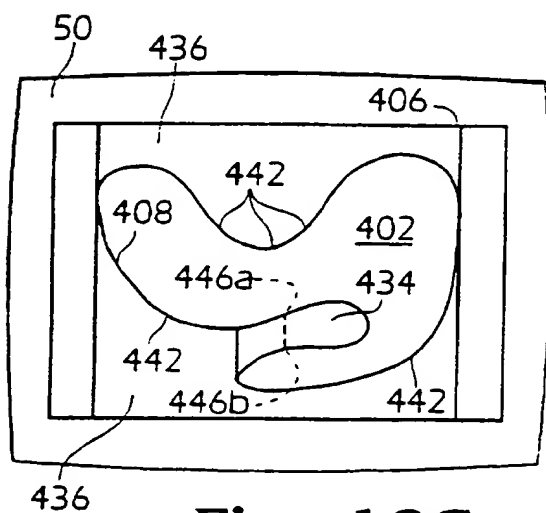


Fig. 18C

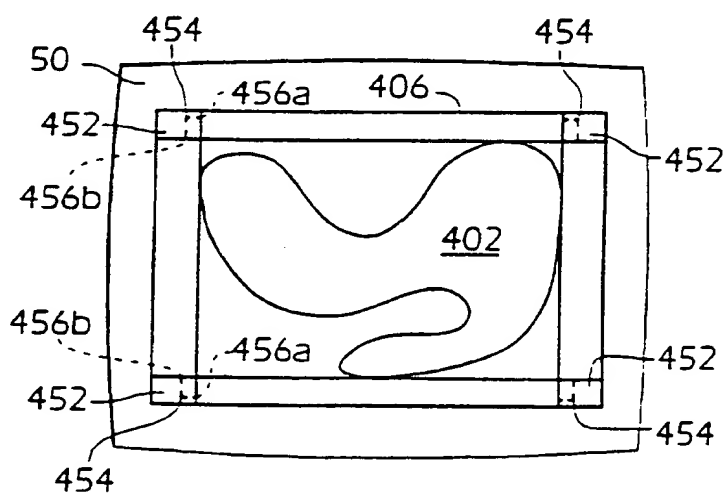


Fig. 18D

Fig. 19A

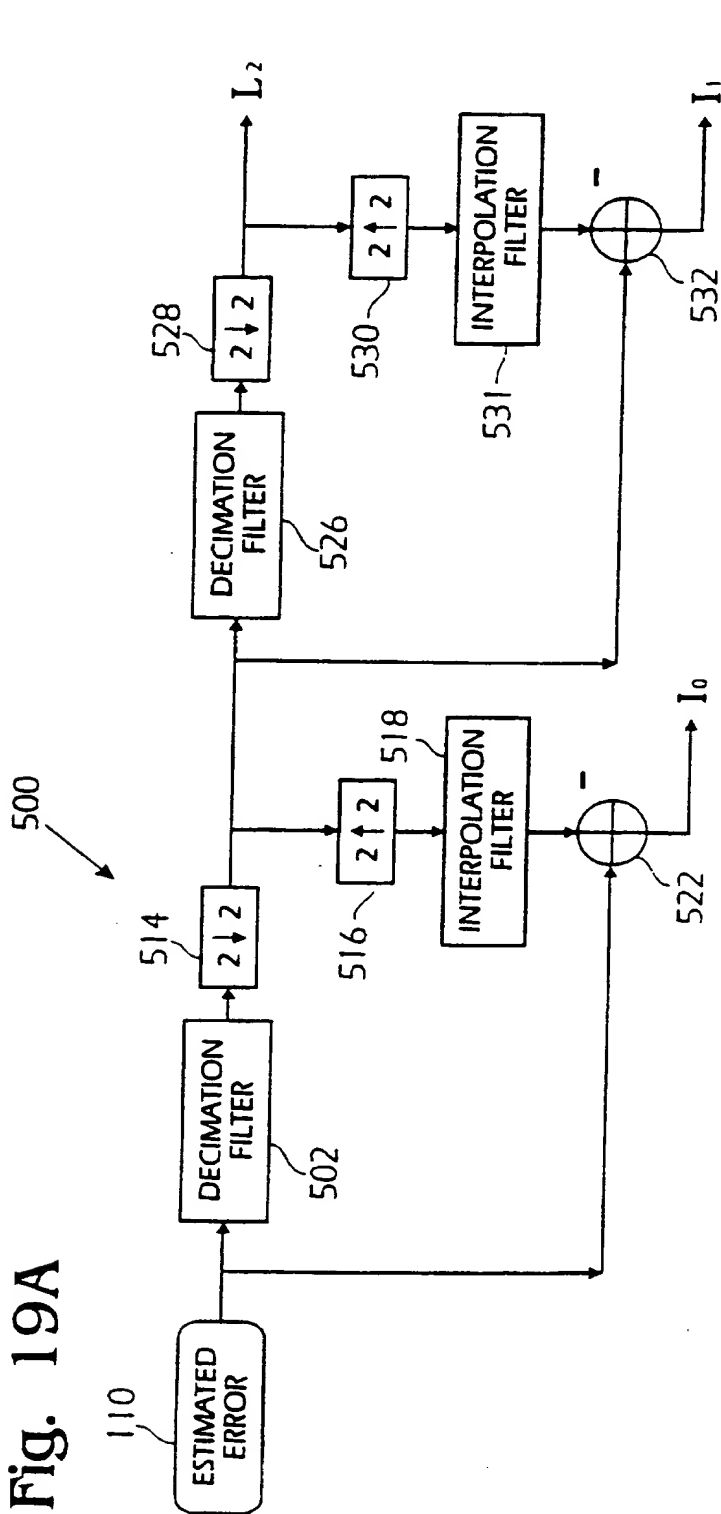


Fig. 19B

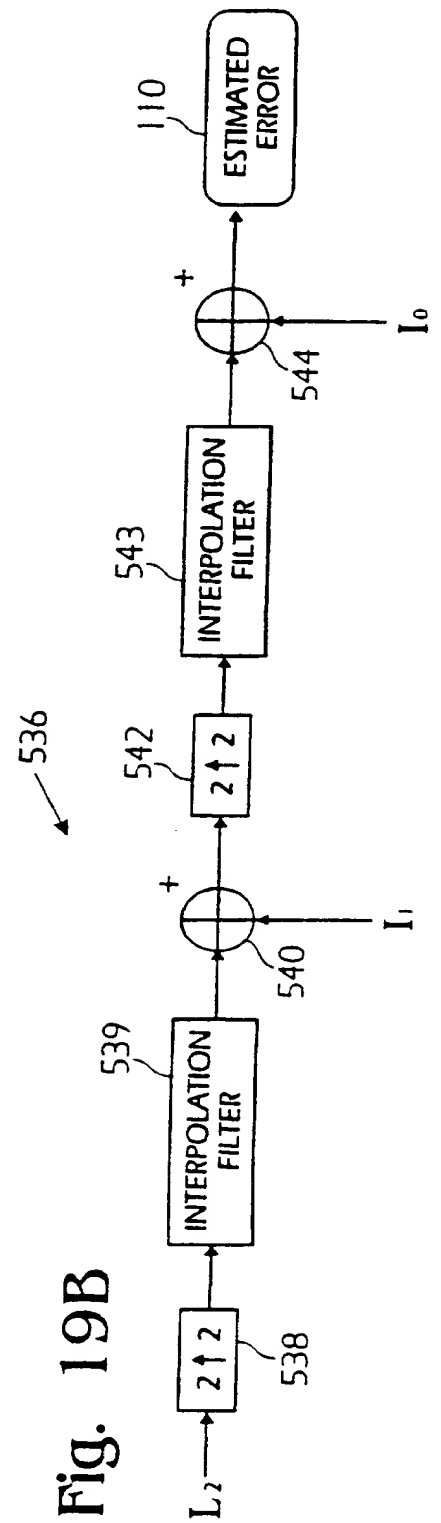


Fig. 3B

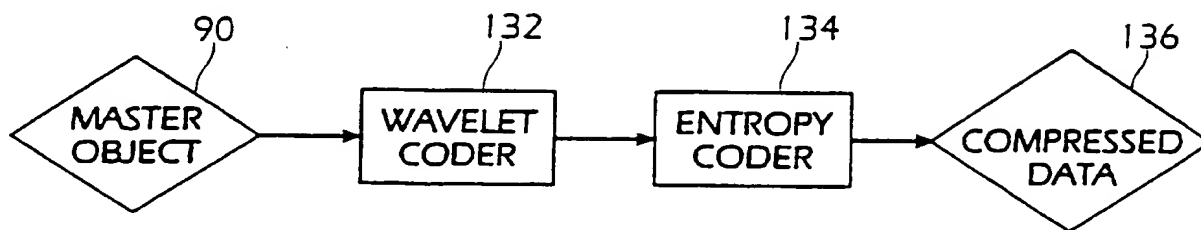


Fig. 23B

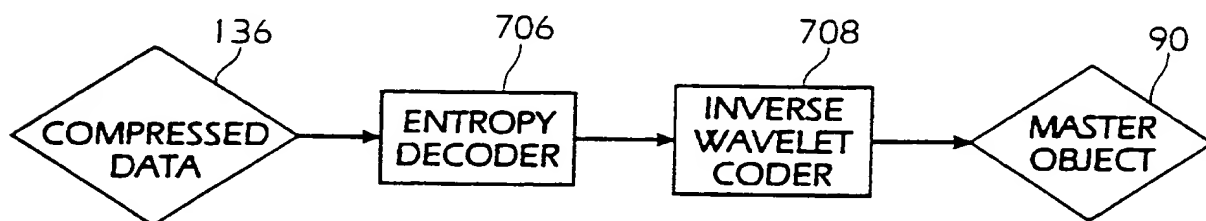


Fig. 20A

504

4	6	8	10	15	12	4	12	15
5	8	9	10	14	15	10	12	14
6	10	10	9	13	11	9	9	9
7	12	11	8	11	8	6	5	8
8	13	9	11	7	9	5	2	4

506a, 506b, 506c

Fig. 20C

515

8	10	12
10	10	9

Fig. 20B

512

8	9	10	12	12
9	10	10	11	11
10	10	10	9	9

Fig. 20D

520

8	9	10	11	12
9	9	10	10	10.5
10	10	10	9.5	9

Fig. 21

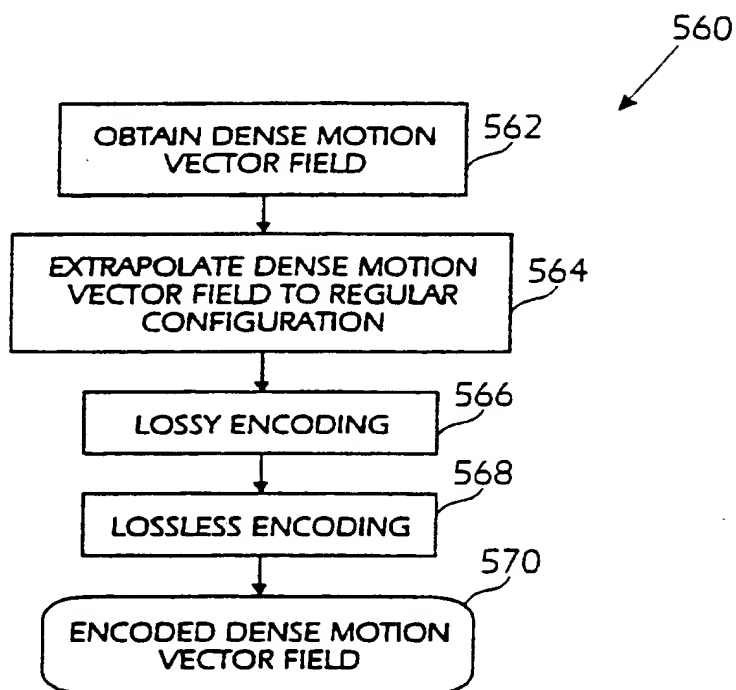
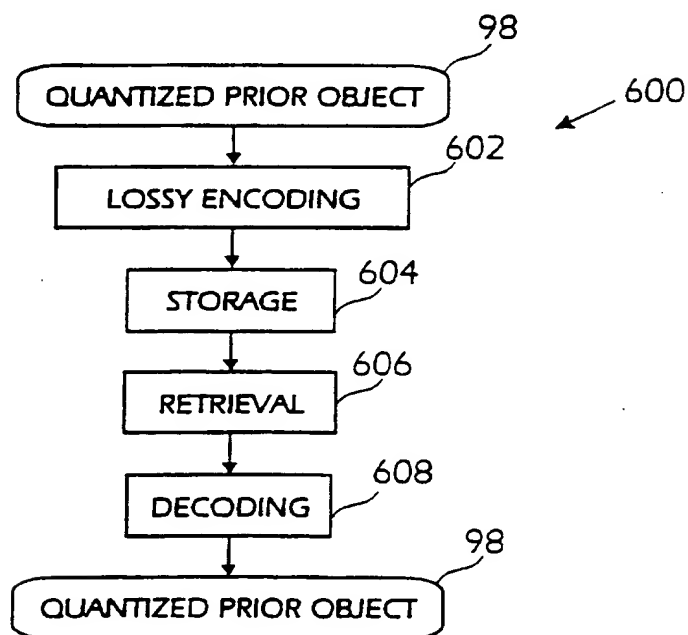


Fig. 22



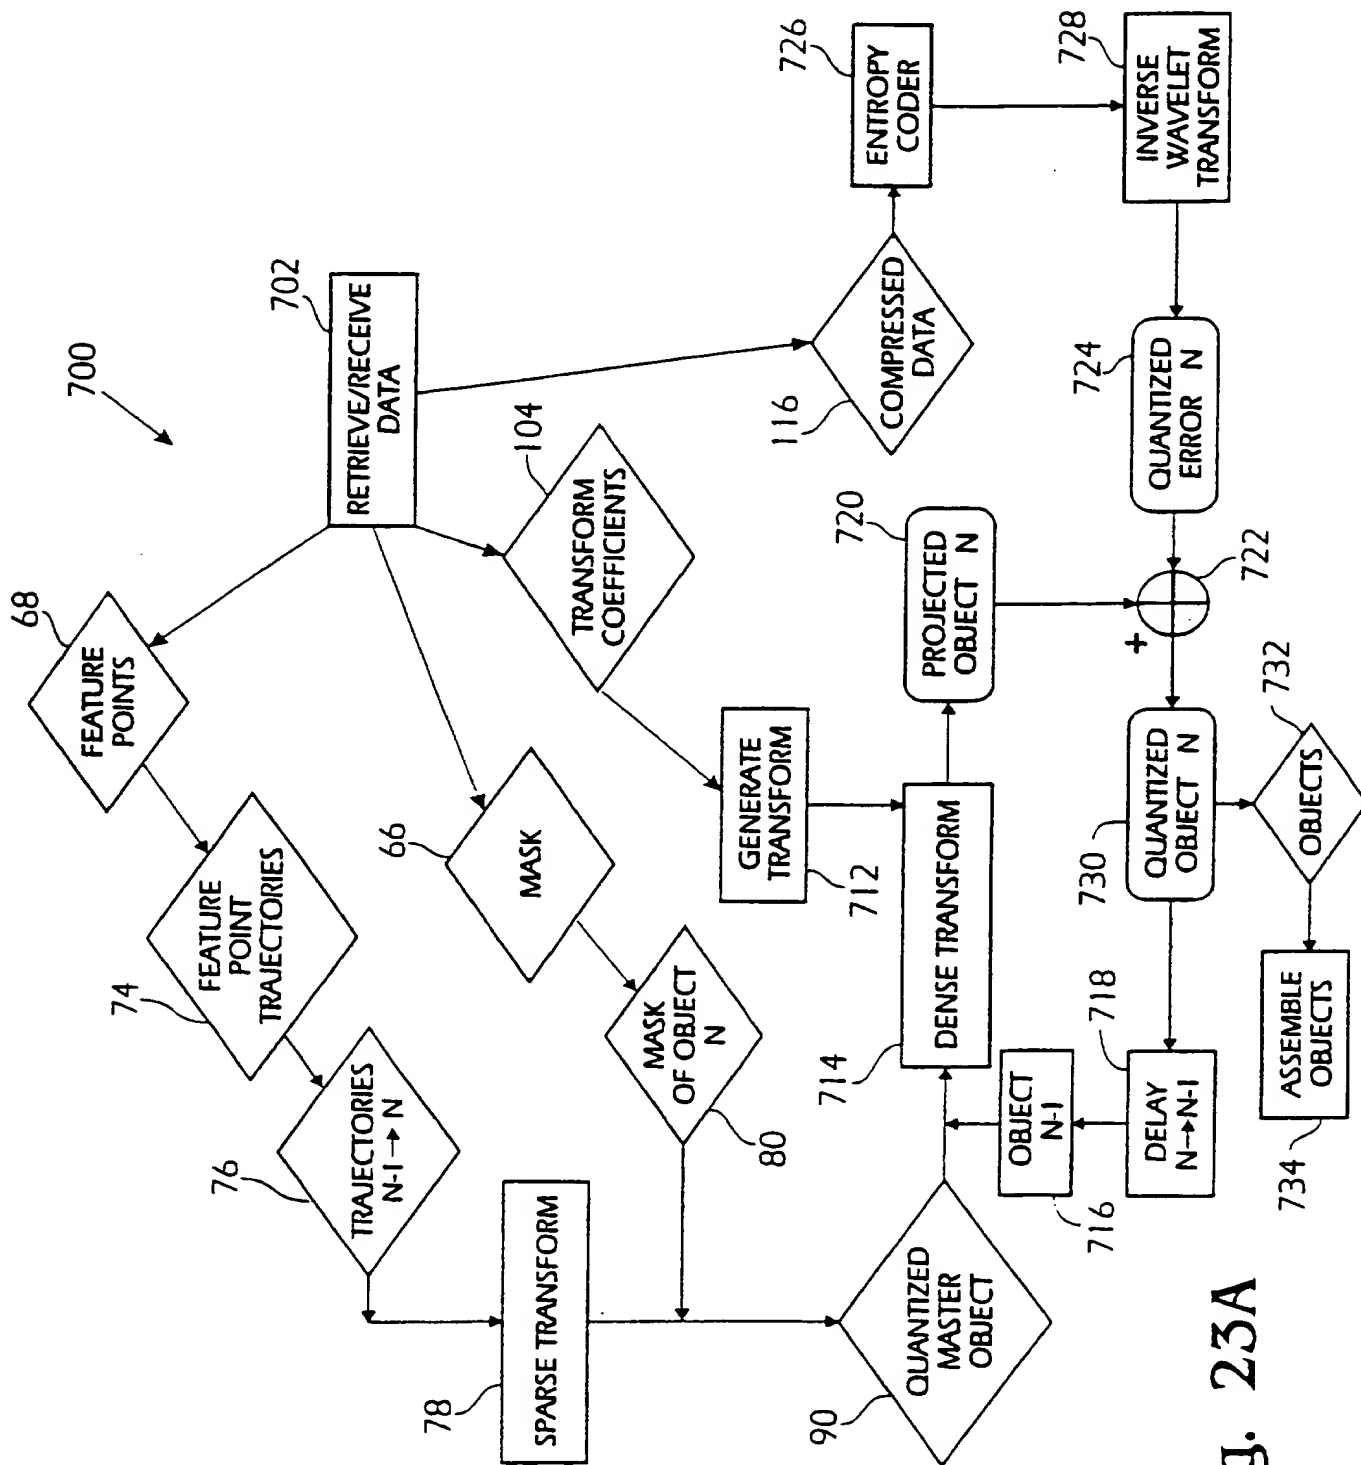


Fig. 23A

Fig. 24A
PRIOR ART

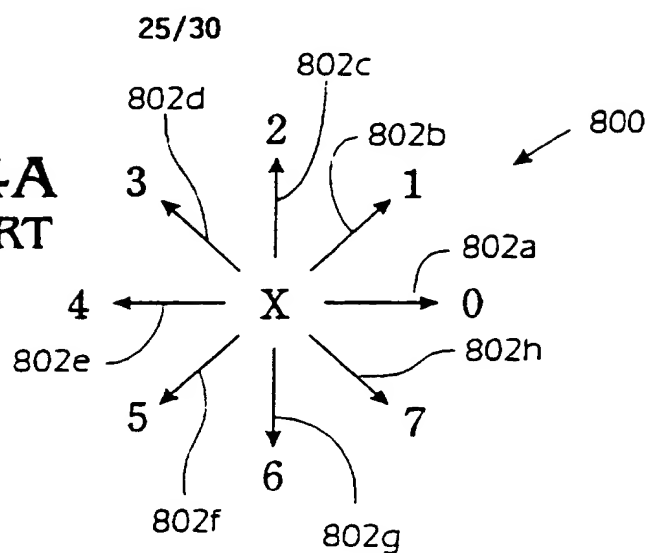


Fig. 24B
PRIOR ART



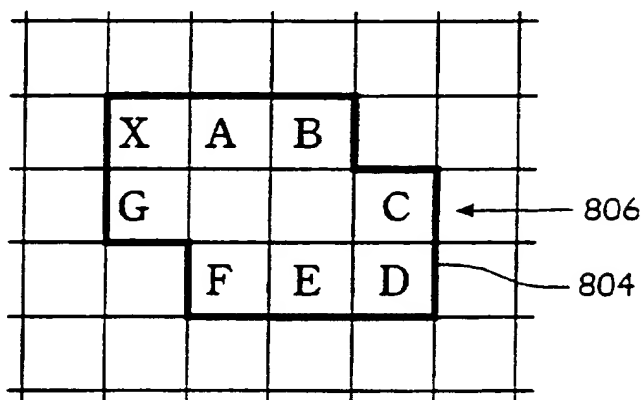


Fig. 25B

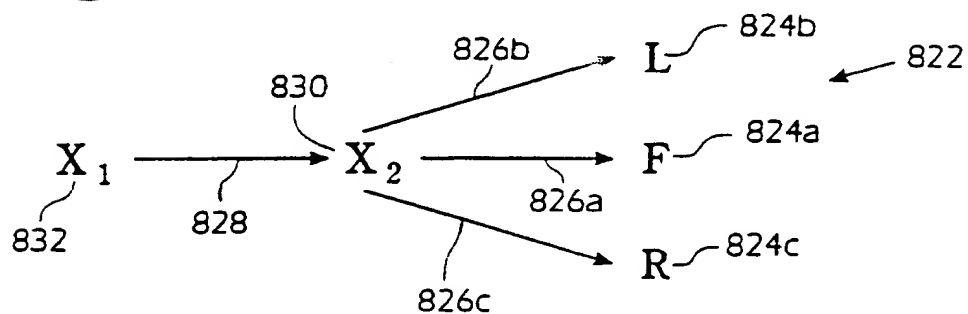

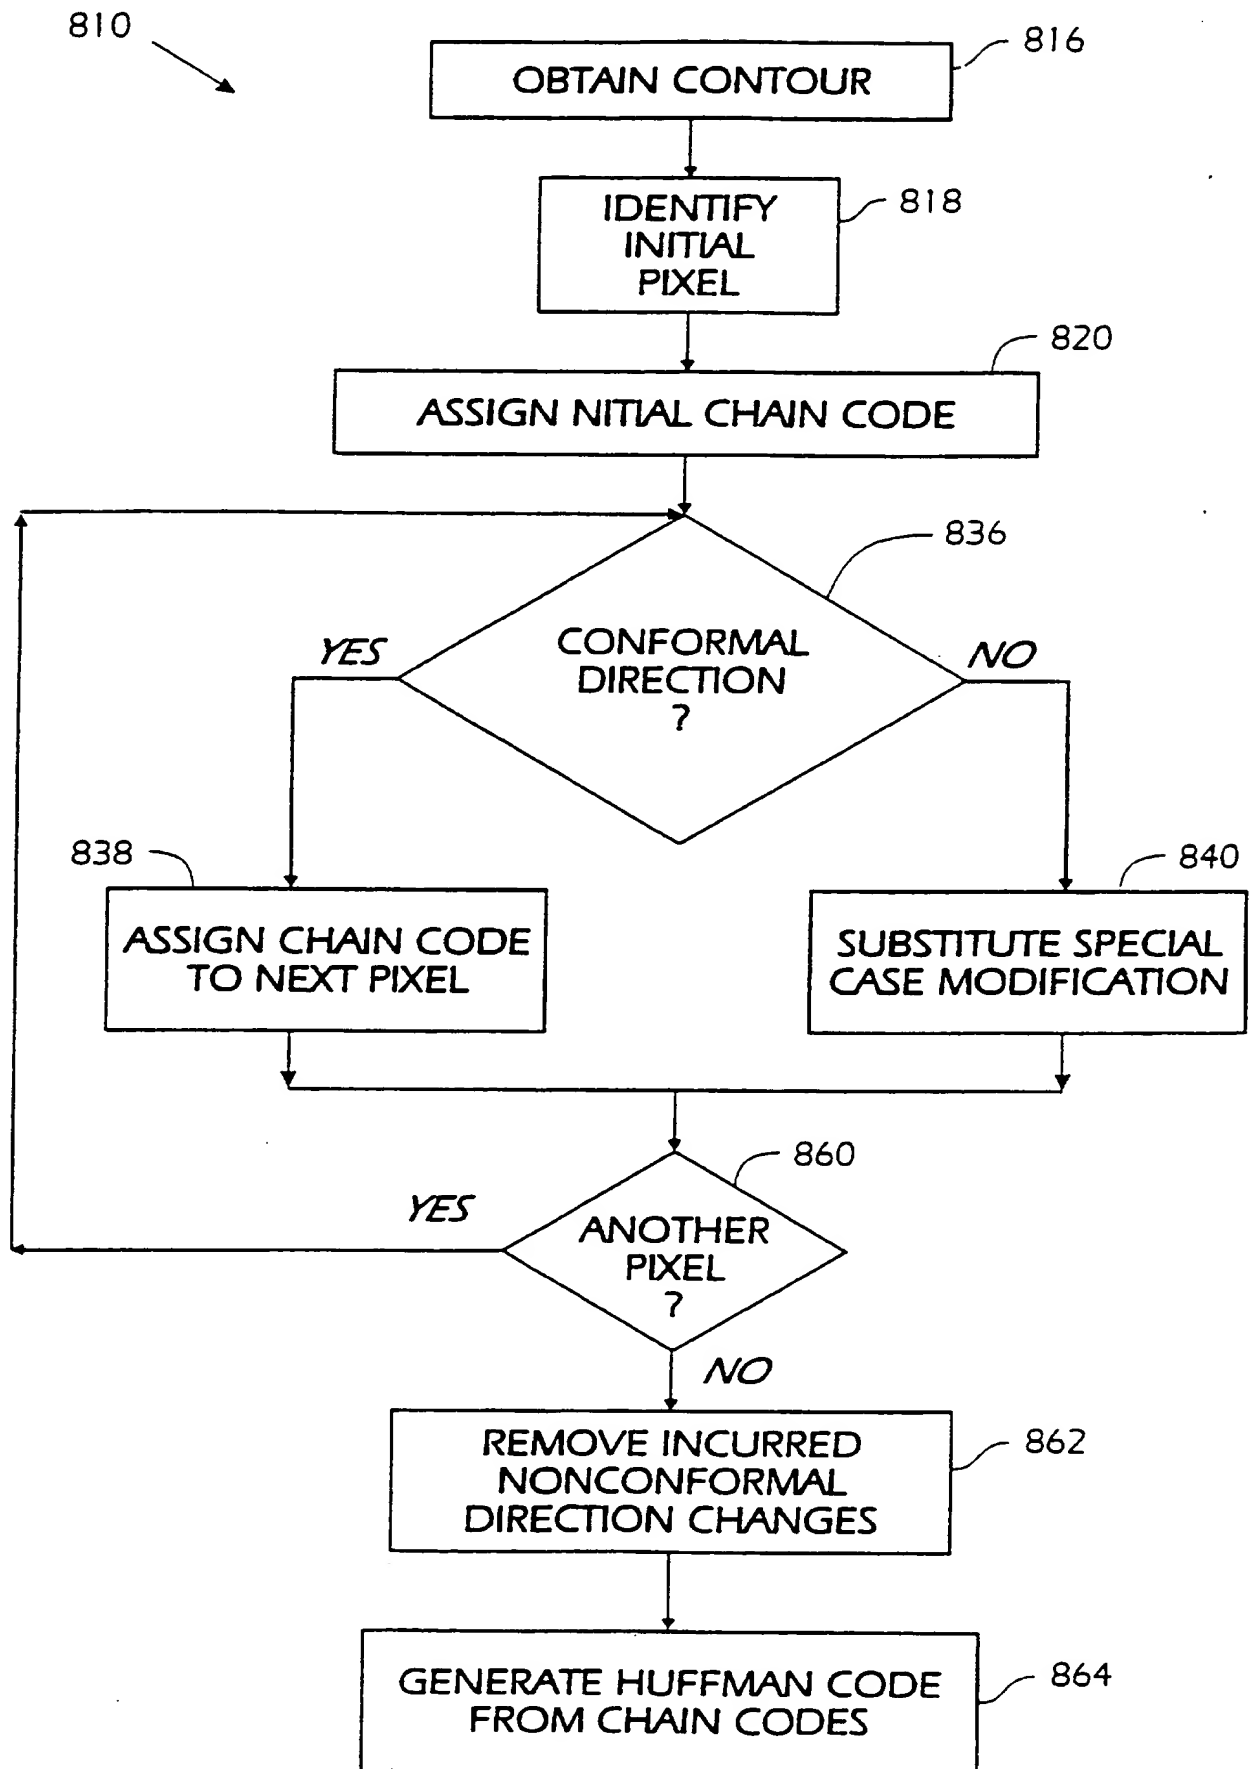

27/30


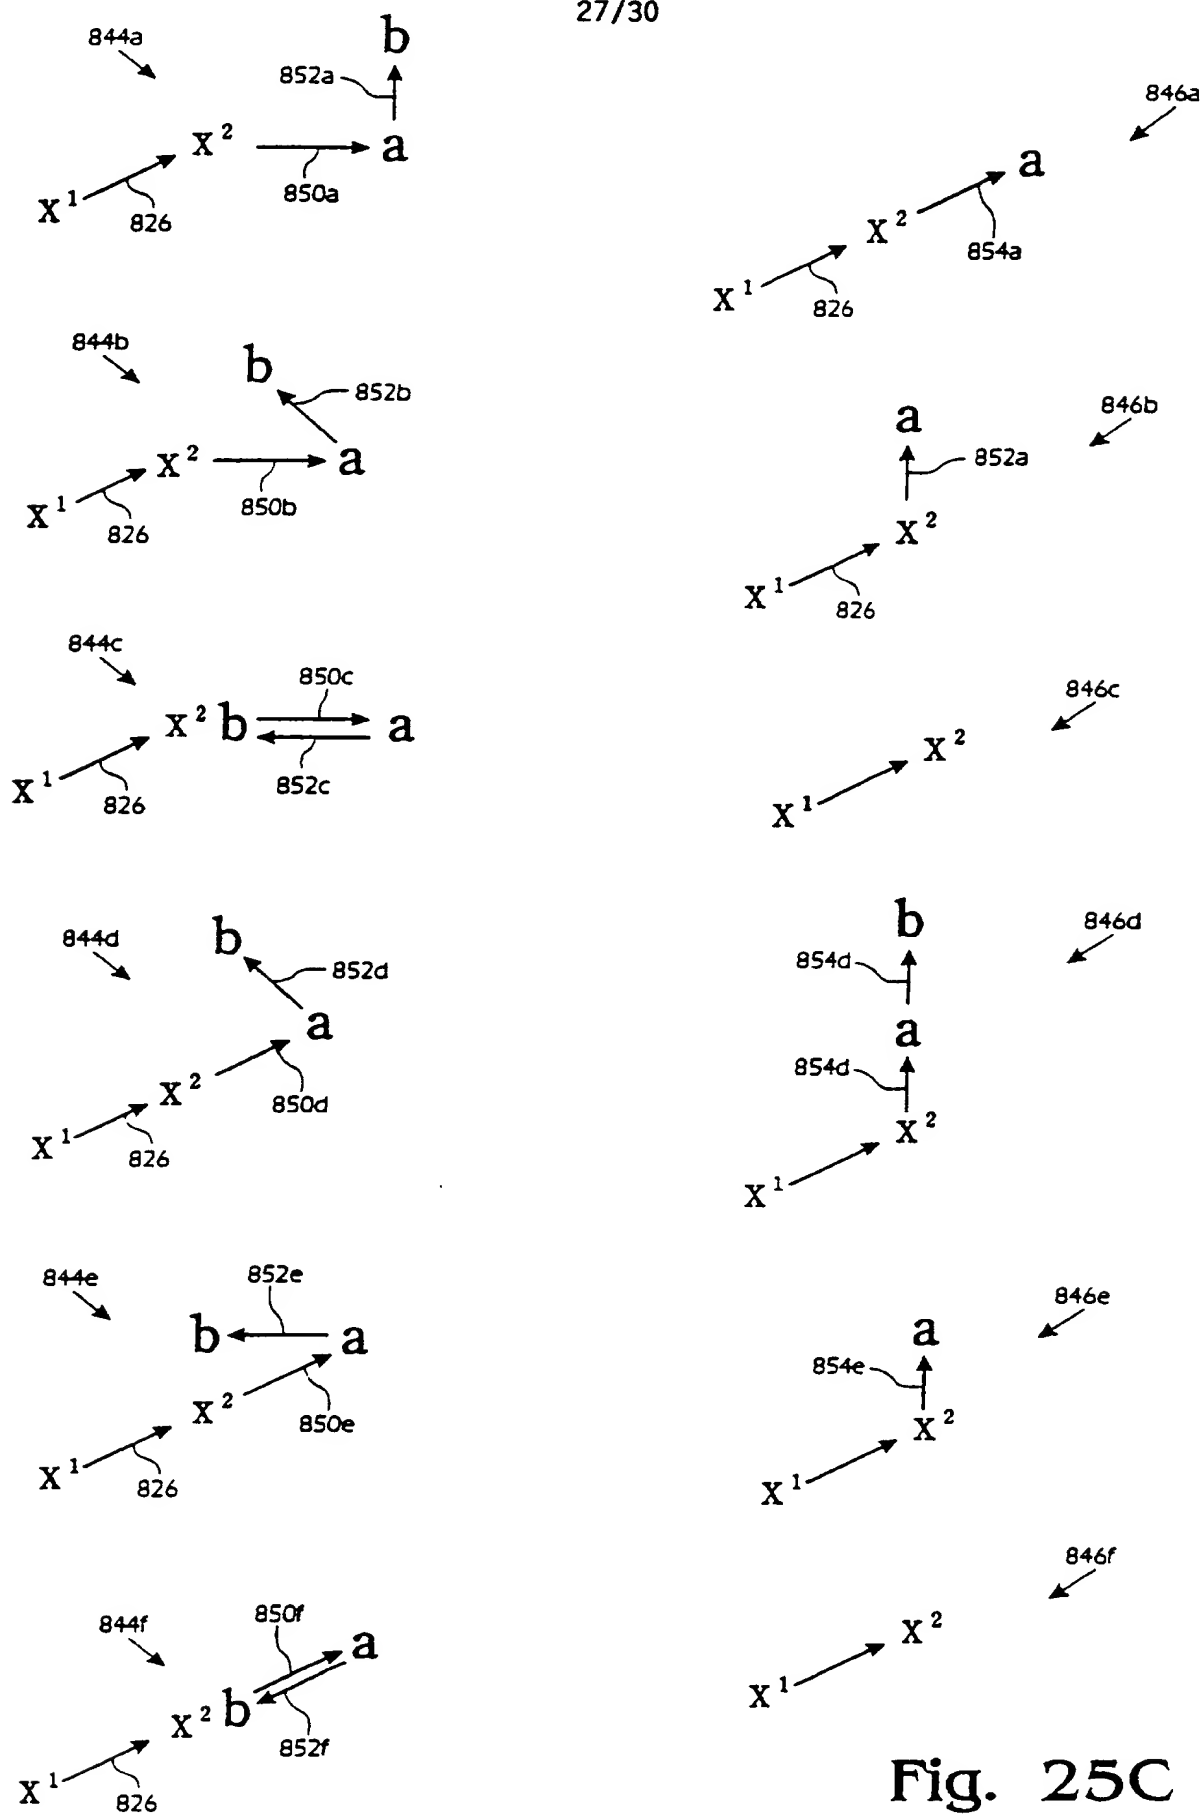


Fig. 25C

Fig. 26

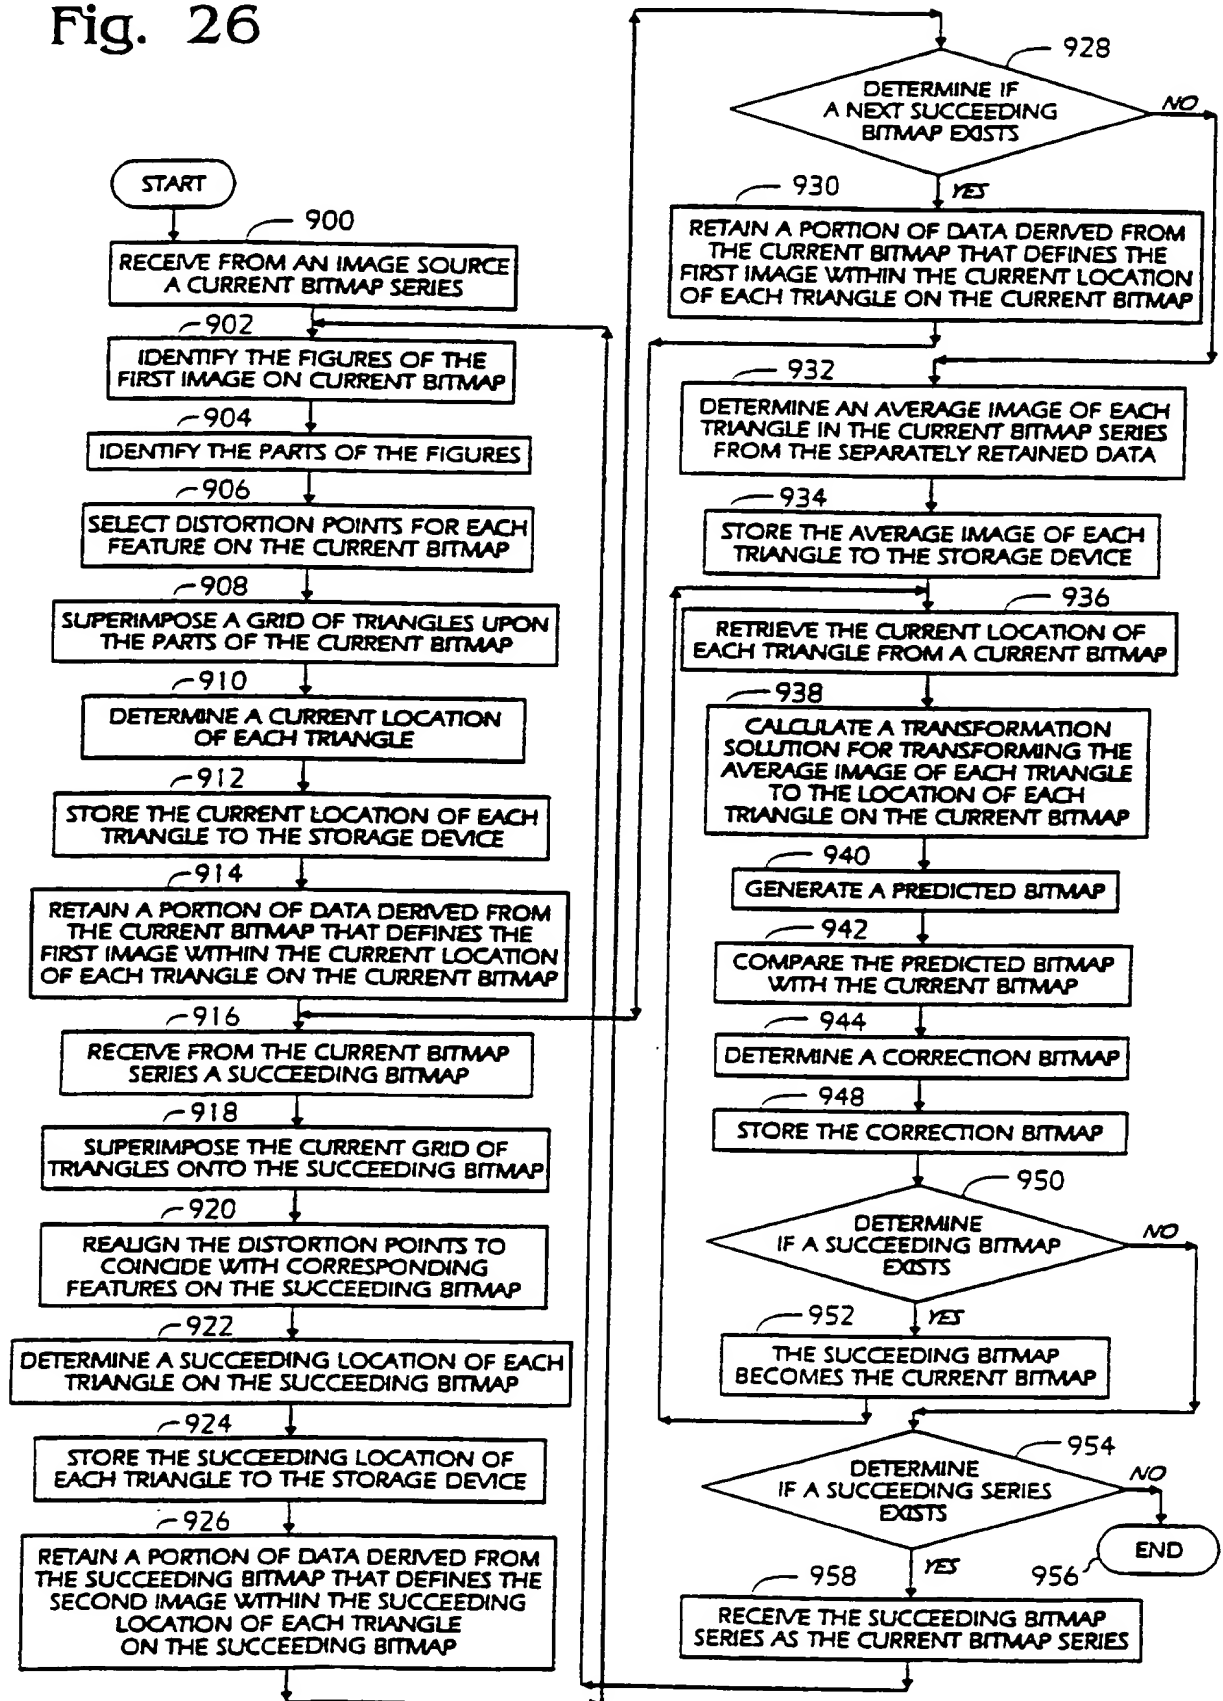

29/30

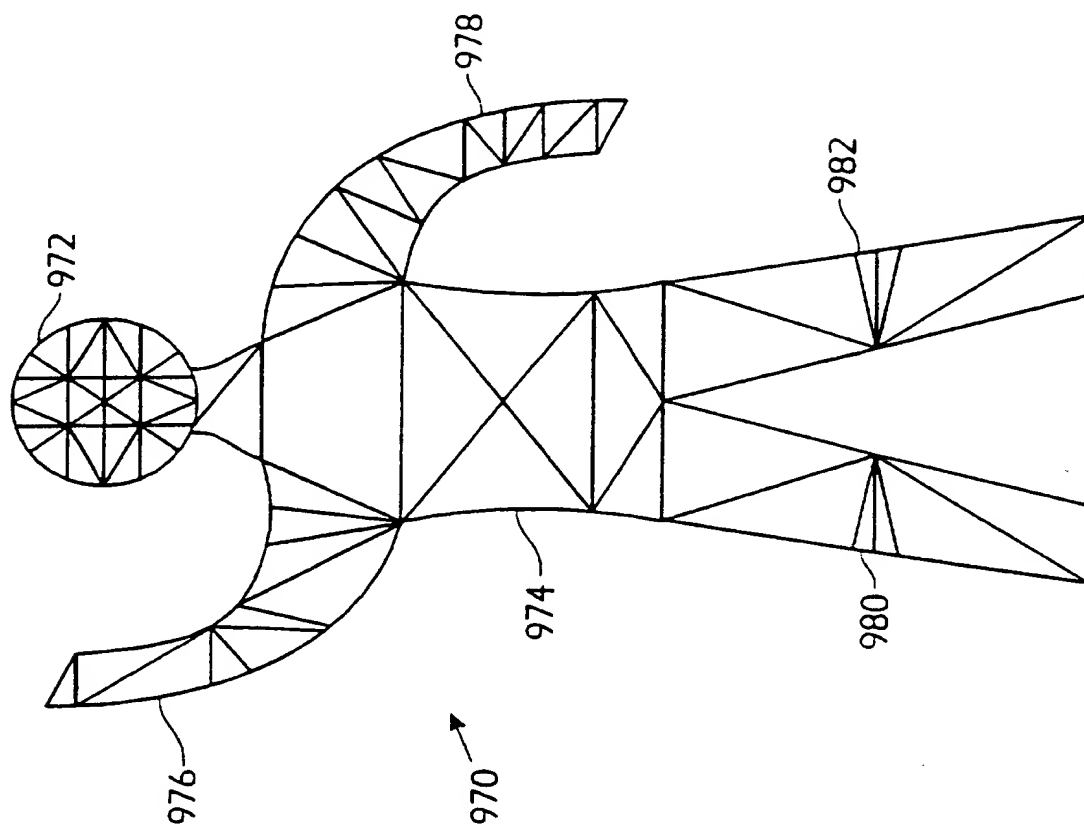


Fig. 27B

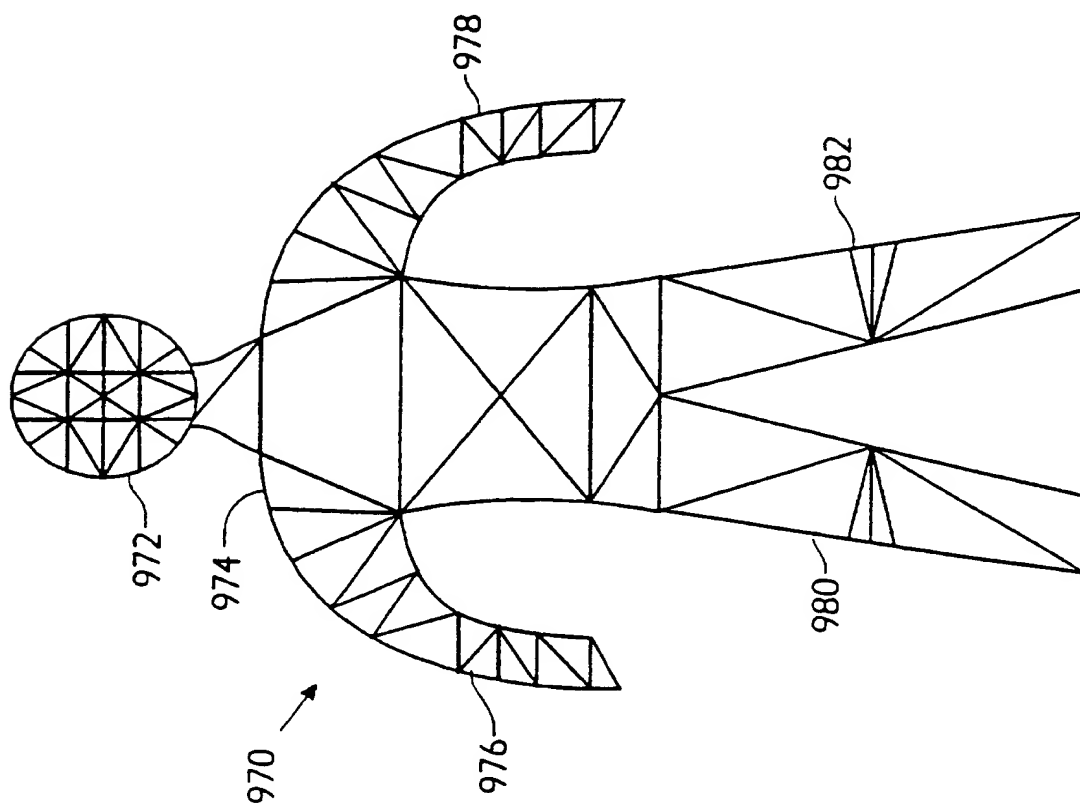


Fig. 27A

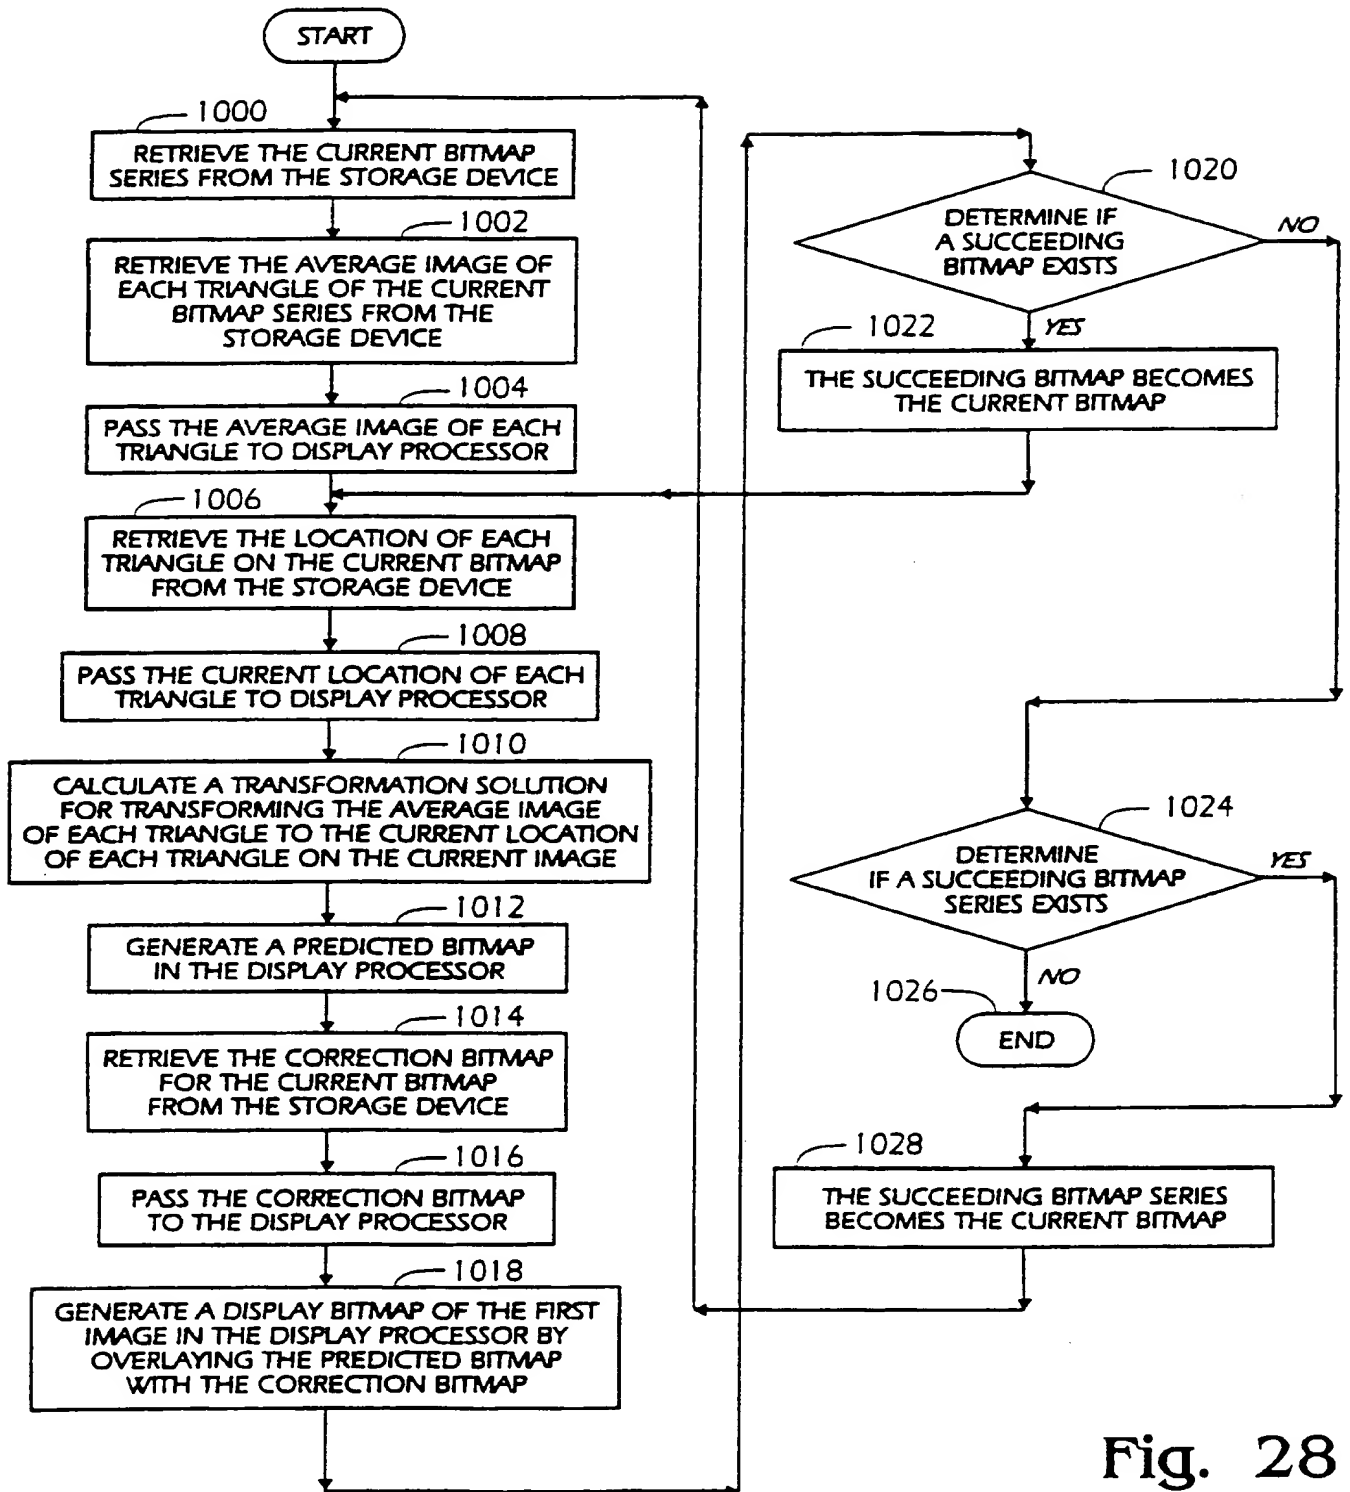



Fig. 28



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/26, 7/36		A3	(11) International Publication Number: WO 97/13372
			(43) International Publication Date: 10 April 1997 (10.04.97)
(21) International Application Number: PCT/US96/15892 (22) International Filing Date: 4 October 1996 (04.10.96) (30) Priority Data: 60:005.031 5 October 1995 (05.10.95) US (71) Applicant: MICROSOFT CORPORATION [US/US]: One Microsoft Way, Redmond, WA 98052 (US). (72) Inventors: LEE, Ming-Chieh; 5588 166th Place S.E., Bellevue, WA 98006 (US). CHEN, Wei-ge; 2900 First Avenue S-509, Seattle, WA 98121 (US). (74) Agent: MEININGER, Mark, M.; Klarquist, Sparkman, Campbell, Leigh & Whinston, One World Trade Center, Suite 1600, 121 S.W. Salmon Street, Portland, OR 97204 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 29 May 1997 (29.05.97)

(54) Title: FEATURE-BASED VIDEO COMPRESSION METHOD

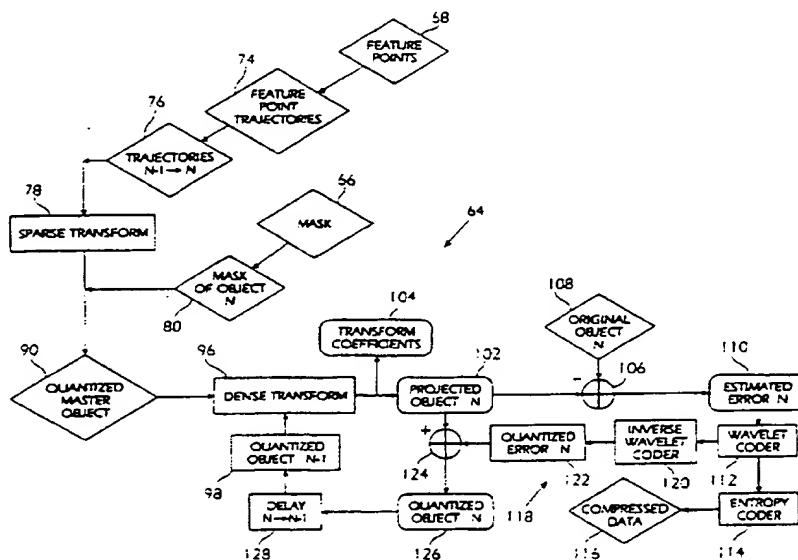

(57) Abstract

Video encoding and decoding processes provide compression and decompression of digitized video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object- or feature- based video compression to improve the accuracy and versatility of encoding interframe motion and interframe image features. Video information is compressed relative to objects or features of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. The decoder process decompresses the encoded video information to reconstruct the objects or features of arbitrary configurations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LT	Lithuania	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauntania	VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/15892

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/26 H04N7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 625 853 A (NIPPON TELEGRAPH AND TELEPHONE CORP.) 23 November 1994	1-3, 5-15, 17, 19, 21-27, 77
Y	see the whole document	4, 16, 18, 20
A	WO 91 11782 A (DAVID SARNOFF RESEARCH CENTER, INC.) 8 August 1991	1, 3, 19
Y	see the whole document	4, 20
A	EP 0 474 307 A (PHILIPS ELECTRONICS AND ASSOCIATED IND. LTD.) 11 March 1992	14
Y	see the whole document	16
A	US 5 117 287 A (KOIKE ET AL.) 26 May 1992	14
Y	see column 6 - column 8; figures 4, 6	18
	- / - -	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

- * "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- * "&" document member of the same patent family

Date of the actual completion of the international search

21 April 1997

Date of mailing of the international search report

28.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Foglia, P

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 96/15892

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	VISUAL COMMUNICATION AND IMAGE PROCESSING '91, vol. 1605, no. 1/2, 11 November 1991, BOSTON, MS, US, pages 570-581, XP000479265 SANSON: "Motion Affine Models Identification and Application to Television Image Coding"	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20
X	IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, vol. 4, no. 2, April 1994, NEW YORK US, pages 181-194, XP000489690 HÖTTER: "Optimization and Efficiency of an Object-Oriented Analysis-Synthesis Coder"	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20
X	IEEE TRANSACTIONS ON IMAGE PROCESSING, vol. 2, no. 4, October 1993, NEW YORK US, pages 481-498, XP000412063 ZAKHOR ET AL.: "Edge-Based 3-D Camera Motion Estimation with Application to Video Coding"	1-3, 5-15,17, 19, 21-27,77
A	see page 488, left-hand column, line 1 - line 15; figures 2-4	4,16,18, 20
X	EP 0 614 318 A (TOSHIBA KK) 7 September 1994	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20
A	CVGIP IMAGE UNDERSTANDING, vol. 60, no. 2, September 1994, ORLANDO, FL, US, pages 119-140, XP000484198 MEYER ET AL.: "Region-Based Tracking Using Affine Motion Models in Long Image Sequences"	1-27,77
A	US 5 295 201 A (YOKOHAMA) 15 March 1994 see the whole document	1-27,77
	-/--	

INTERNATIONAL SEARCH REPORT

Intern. Patent Application No.

PCT/US 96/15892

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 39, no. 3, August 1993, NEW YORK US, pages 141-150, XP000396273 NIEWEGLOWSKI ET AL.: "A Novel Video Coding Scheme Based on Temporal Prediction using Digital Image Warping" see the whole document ---	28-43
A	IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, vol. 3, no. 1, February 1993, NEW YORK US, pages 54-70, XP000334579 ORCHARD: "Predictive Motion-Field Segmentation for Image Sequence Coding" see the whole document ---	28-43
A	OPTICAL ENGINEERING, vol. 32, no. 7, July 1993, BELLINGHAM, WA, US, pages 1464-1474, XP000382627 SEFERIDIS ET AL.: "General Approach to Block-Matching Motion Estimation" see the whole document ---	28-43
A	EP 0 497 586 A (SONY CORP.) 5 August 1992 see the whole document ---	44-63
A	EP 0 395 293 A (BRITISH TELECOMMUNICATIONS PLC) 31 October 1990 see the whole document ---	44-63
X	PROCEEDINGS OF THE ACM MULTIMEDIA 93, 1 August 1993, ANAHEIM, CA, US, pages 83-90, XP002029826 CHANG ET AL.: "Transform Coding of Arbitrarily-Shaped Image Segments" see the whole document ---	64-76, 78-80
X	ICIP-94, vol. I/III, 13 November 1994, AUSTIN, TX, US, pages 85-89, XP002029827 CHEN ET AL.: "A Block Transform Coder for Arbitrarily Shaped Image Segments" see the whole document ---	64-76, 78-80
A	SIGNAL PROCESSING IV: THEORIES AND APPLICATIONS, September 1988, ELSEVIER, pages 1145-1148, XP002029828 FRANKE ET AL.: "Constrained Iterative Restoration Techniques: a Powerful Tool in Region Oriented Texture Coding" see the whole document -----	64-76, 78-80

Form PCT:ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 96/15892

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

(see Annex)

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 96/ 15892

FURTHER INFORMATION CONTINUED FROM PCT/SA/210

1. Claims 1-27,77: Method of encoding/decoding of a video sequence using a motion transformation between arbitrary image features
2. Claims 28-63: Method for estimating motion between corresponding pixels in consecutive image frames
3. Claims 64-76,78-80: Method for transforming an arbitrarily shaped image region into a region of predetermined configuration

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/15892

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 625853 A	23-11-94	JP 7046595 A	14-02-95
		US 5598215 A	28-01-97

WO 9111782 A	08-08-91	EP 0513047 A	19-11-92
		JP 5503796 T	17-06-93
		US 5067014 A	19-11-91

EP 474307 A	11-03-92	JP 4281688 A	07-10-92
		US 5280530 A	18-01-94

US 5117287 A	26-05-92	JP 3253190 A	12-11-91
		JP 8002107 B	10-01-96

EP 614318 A	07-09-94	JP 7067111 A	10-03-95
		JP 7170523 A	04-07-95
		US 5592228 A	07-01-97

US 5295201 A	15-03-94	JP 5199510 A	06-08-93
		CA 2087802 A	22-07-93

EP 497586 A	05-08-92	JP 4245386 A	01-09-92
		JP 4248683 A	04-09-92
		JP 4261288 A	17-09-92
		US 5586202 A	17-12-96


EP 395293 A	31-10-90	AU 626120 B	23-07-92
		AU 5422390 A	16-11-90
		CA 2053241 A	27-10-90
		WO 9013205 A	01-11-90
		JP 4506889 T	26-11-92
		US 5206723 A	27-04-93



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04N 7/26, 7/36</p>	<p>A3</p>	<p>(11) International Publication Number: WO 97/13372</p> <p>(43) International Publication Date: 10 April 1997 (10.04.97)</p>
<p>(21) International Application Number: PCT/US96/15892</p> <p>(22) International Filing Date: 4 October 1996 (04.10.96)</p> <p>(30) Priority Data: 60/005,031 5 October 1995 (05.10.95) US</p> <p>(71) Applicant: MICROSOFT CORPORATION [US/US]; One Microsoft Way, Redmond, WA 98052 (US).</p> <p>(72) Inventors: LEE, Ming-Chieh; 5588 166th Place S.E., Bellevue, WA 98006 (US). CHEN, Wei-ge; 2900 First Avenue S-509, Seattle, WA 98121 (US).</p> <p>(74) Agent: MEININGER, Mark, M.; Klarquist, Sparkman, Campbell, Leigh & Winston, One World Trade Center, Suite 1600, 121 S.W. Salmon Street, Portland, OR 97204 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 29 May 1997 (29.05.97)</p>

(54) Title: FEATURE-BASED VIDEO COMPRESSION METHOD

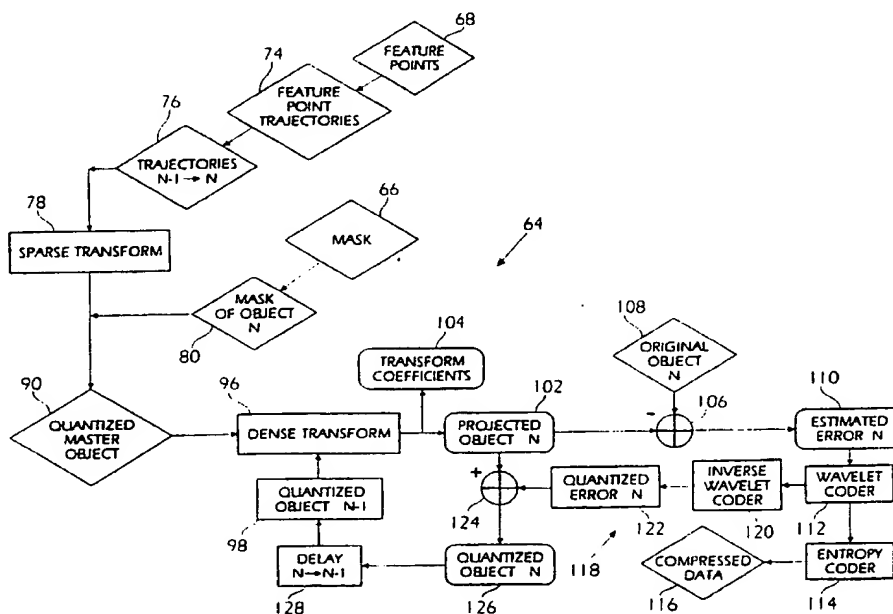

(57) Abstract

Video encoding and decoding processes provide compression and decompression of digitized video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object- or feature- based video compression to improve the accuracy and versatility of encoding interframe motion and interframe image features. Video information is compressed relative to objects or features of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. The decoder process decompresses the encoded video information to reconstruct the objects or features of arbitrary configurations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

FEATURE-BASED VIDEO COMPRESSION METHOD

FIELD OF THE INVENTION

The present invention relates to processes for compressing digital video
5 signals and, in particular, to an object-based digital video encoding process with
error feedback to increase accuracy.

BACKGROUND OF THE INVENTION

Full-motion video displays based upon analog video signals have long been
10 available in the form of television. With recent increases in computer processing
capabilities and affordability, full-motion video displays based upon digital video
signals are becoming more widely available. Digital video systems can provide
significant improvements over conventional analog video systems in creating,
modifying, transmitting, storing, and playing full-motion video sequences.

15 Digital video displays include large numbers of image frames that are played
or rendered successively at frequencies of between 30 and 75 Hz. Each image frame
is a still image formed from an array of pixels according to the display resolution of
a particular system. As examples, VHS-based systems have display resolutions of
320x480 pixels, NTSC-based systems have display resolutions of 720x486 pixels,
20 and high-definition television (HDTV) systems under development have display
resolutions of 1360x1024 pixels.

The amounts of raw digital information included in video sequences are
massive. Storage and transmission of these amounts of video information is
infeasible with conventional personal computer equipment. With reference to a
25 digitized form of a relatively low resolution VHS image format having a 320x480
pixel resolution, a full-length motion picture of two hours in duration could
correspond to 100 gigabytes of digital video information. By comparison,
conventional compact optical disks have capacities of about 0.6 gigabytes, magnetic
hard disks have capacities of 1-2 gigabytes, and compact optical disks under
30 development have capacities of up to 8 gigabytes.

In response to the limitations in storing or transmitting such massive amounts

of digital video information, various video compression standards or processes have been established, including MPEG-1, MPEG-2, and H.26X. These conventional video compression techniques utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression
5 in which pixel-based representations of image frames are converted to motion representations. In addition, the conventional video compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed. Intraframe compression is based upon conventional
10 processes for compressing still images, such as discrete cosine transform (DCT) encoding.

Although differing in specific implementations, the MPEG-1, MPEG-2, and H.26X video compression standards are similar in a number of respects. The following description of the MPEG-2 video compression standard is generally
15 applicable to the others.

MPEG-2 provides interframe compression and intraframe compression based upon square blocks or arrays of pixels in video images. A video image is divided into transformation blocks having dimensions of 16x16 pixels. For each transformation block T_N in an image frame N, a search is performed across the
20 image of an immediately preceding image frame N-1 or also a next successive video frame N+1 (i.e., bidirectionally) to identify the most similar respective transformation blocks T_{N+1} or T_{N-1} .

Ideally, and with reference to a search of the next successive image frame, the pixels in transformation blocks T_N and T_{N+1} are identical, even if the
25 transformation blocks have different positions in their respective image frames. Under these circumstances, the pixel information in transformation block T_{N+1} is redundant to that in transformation block T_N . Compression is achieved by substituting the positional translation between transformation blocks T_N and T_{N+1} for the pixel information in transformation block T_{N+1} . In this simplified example, a
30 single translational vector ($\Delta X, \Delta Y$) is designated for the video information associated with the 256 pixels in transformation block T_{N+1} .

Frequently, the video information (i.e., pixels) in the corresponding transformation blocks T_N and T_{N+1} are not identical. The difference between them is designated a transformation block error E , which often is significant. Although it is compressed by a conventional compression process such as discrete cosine transform (DCT) encoding, the transformation block error E is cumbersome and limits the extent (ratio) and the accuracy by which video signals can be compressed.

Large transformation block errors E arise in block-based video compression methods for several reasons. The block-based motion estimation represents only translational motion between successive image frames. The only change between corresponding transformation blocks T_N and T_{N+1} that can be represented are changes in the relative positions of the transformation blocks. A disadvantage of such representations is that full-motion video sequences frequently include complex motions other than translation, such as rotation, magnification and shear. Representing such complex motions with simple translational approximations results in the significant errors.

Another aspect of video displays is that they typically include multiple image features or objects that change or move relative to each other. Objects may be distinct characters, articles, or scenery within a video display. With respect to a scene in a motion picture, for example, each of the characters (i.e., actors) and articles (i.e., props) in the scene could be a different object.

The relative motion between objects in a video sequence is another source of significant transformation block errors E in conventional video compression processes. Due to the regular configuration and size of the transformation blocks, many of them encompass portions of different objects. Relative motion between the objects during successive image frames can result in extremely low correlation (i.e., high transformation errors E) between corresponding transformation blocks. Similarly, the appearance of portions of objects in successive image frames (e.g., when a character turns) also introduces high transformation errors E .

Conventional video compression methods appear to be inherently limited due to the size of transformation errors E . With the increased demand for digital video display capabilities, improved digital video compression processes are required.

SUMMARY OF THE INVENTION

The present invention includes a video compression encoder process for compressing digitized video signals representing display motion in video sequences of multiple image frames. The encoder process utilizes object-based video
5 compression to improve the accuracy and versatility of encoding interframe motion and intraframe image features. Video information is compressed relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels as in conventional video compression methods. This reduces the error components and thereby improves the compression efficiency and accuracy. As another benefit,
10 object-based video compression of this invention provides interactive video editing capabilities for processing compressed video information.

In a preferred embodiment, the process or method of this invention includes identifying image features of arbitrary configuration in a first video image frame and defining within the image feature multiple distinct feature points. The feature points
15 of the image feature in the first video image frame are correlated with corresponding feature points of the image feature in a succeeding second video image frame, thereby to determine an estimation of the image feature in the second video image frame. A difference between the estimated and actual image feature in the second video image frame is determined and encoded in a compressed format.

20 The encoder process of this invention overcomes the shortcomings of the conventional block-based video compression methods. The encoder process preferably uses a multi-dimensional transformation method to represent mappings between corresponding objects in successive image frames. The multiple dimensions of the transformation refer to the number of coordinates in its generalized form.
25 The multi-dimensional transformation is capable of representing complex motion that includes any or all of translation, rotation, magnification, and shear. As a result, complex motion of objects between successive image frames may be represented with relatively low transformation error.

Another source of error in conventional block-based video compression
30 methods is motion between objects included within a transformation block. The object-based video compression or encoding of this invention substantially eliminates

the relative motion between objects within transformation blocks. As a result, transformation error arising from inter-object motion also is substantially decreased. The low transformation errors arising from the encoder process of this invention allow it to provide compression ratios up to 300% greater than those obtainable from prior encoder processes such as MPEG-2.

The foregoing and other features and advantages of the preferred embodiment of the present invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a computer system that may be used to implement a method and apparatus embodying the invention.

Figs. 2A and 2B are simplified representations of a display screen of a video display device showing two successive image frames corresponding to a video signal.

Fig. 3A is a generalized functional block diagram of a video compression encoder process for compressing digitized video signals representing display motion in video sequences of multiple image frames. Fig. 3B is a functional block diagram of a master object encoder process according to this invention.

Fig. 4 is a functional block diagram of an object segmentation process for segmenting selected objects from an image frame of a video sequence.

Fig. 5A is simplified representation of display screen of the video display device of Fig. 2A, and Fig. 5B is an enlarged representation of a portion of the display screen of Fig. 5A.

Fig. 6 is a functional block diagram of a polygon match process for determining a motion vector for corresponding pairs of pixels in corresponding objects in successive image frames.

Figs. 7A and 7B are simplified representations of a display screen showing two successive image frames with two corresponding objects.

Fig. 8 is a functional block diagram of an alternative pixel block correlation process.

Fig. 9A is a schematic representation of a first pixel block used for identifying corresponding pixels in different image frames. Fig. 9B is a schematic representation of an array of pixels corresponding to a search area in a prior image frame where corresponding pixels are sought. Figs. 9C-9G are schematic
5 representations of the first pixel block being scanned across the pixel array of FIG. 9B to identify corresponding pixels.

Fig. 10A is a schematic representation of a second pixel block used for identifying corresponding pixels in different image frames. Figs. 10B-10F are schematic representations of the second pixel block being scanned across the pixel
10 array of FIG. 9B to identify corresponding pixels.

Fig. 11A is a schematic representation of a third pixel block used for identifying corresponding pixels in different image frames. Figs. 11B-11F are schematic representations of the third pixel block being scanned across the pixel array of Fig. 9B.

15 Fig. 12 is a function block diagram of a multi-dimensional transformation method that includes generating a mapping between objects in first and second successive image frames and quantizing the mapping for transmission or storage.

Fig. 13 is a simplified representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the multi-dimensional transformation
20 method of Fig. 12.

Fig. 14 is an enlarged simplified representation showing three selected pixels of a transformation block used in the quantization of affine transformation coefficients determined by the method of Fig. 12.

Fig. 15 is a functional block diagram of a transformation block optimization
25 method utilized in an alternative embodiment of the multi-dimensional transformation method of Fig. 12.

Fig. 16 is a simplified fragmentary representation of a display screen showing the image frame of Fig. 7B for purposes of illustrating the transformation block optimization method of Fig. 15.

30 Figs. 17A and 17B are a functional block diagram of a precompression extrapolation method for extrapolating image features of arbitrary configuration to a

predefined configuration to facilitate compression.

Figs. 18A-18D are representations of a display screen on which a simple object is rendered to show various aspects of the extrapolation method of Fig. 14.

5 Figs. 19A and 19B are functional block diagrams of an encoder method and a decoder method, respectively, employing a Laplacian pyramid encoder method in accordance with this invention.

Figs. 20A-20D are simplified representations of the color component values of an arbitrary set or array of pixels processed according to the encoder process of Fig. 19A.

10 Fig. 21 is a functional block diagram of a motion vector encoding process according to this invention.

Fig. 22 is a functional block diagram of an alternative quantized object encoder-decoder process.

15 Fig. 23A is a generalized functional block diagram of a video compression decoder process matched to the encoder process of Fig. 3. Fig. 23B is a functional diagram of a master object decoder process according to this invention.

Fig. 24A is a diagrammatic representation of a conventional chain code format. Fig. 24B is a simplified representation of an exemplary contour for processing with the chain code format of Fig. 24A.

20 Fig. 25A is a functional block diagram of a chain coding process of this invention.

Fig. 25B is a diagrammatic representation of a chain code format of the present invention.

25 Fig. 25C is a diagrammatic representation of special case chain code modifications used in the process of Fig. 25A.

Fig. 26 is a functional block diagram of a sprite generating or encoding process.

30 Figs. 27A and 27B are respective first and second objects defined by bitmaps and showing grids of triangles superimposed over the objects in accordance with the process of Fig. 26.

Fig. 28 is a functional block diagram of a sprite decoding process

corresponding to the encoding process of Fig. 26.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to Fig. 1, an operating environment for the preferred embodiment
5 of the present invention is a computer system 20, either of a general purpose or a dedicated type, that comprises at least one high speed central processing unit (CPU) 22, in conjunction with a memory system 24, an input device 26, and an output device 28. These elements are interconnected by a bus structure 30.

The illustrated CPU 22 is of familiar design and includes an ALU 32 for
10 performing computations, a collection of registers 34 for temporary storage of data and instructions, and a control unit 36 for controlling operation of the system 20. CPU 22 may be a processor having any of a variety of architectures including Alpha from Digital, MIPS from MIPS Technology, NEC, IDT, Siemens, and others, x86 from Intel and others, including Cyrix, AMD, and Nexgen, and the PowerPc from
15 IBM and Motorola.

The memory system 24 includes main memory 38 and secondary storage 40. Illustrated main memory 38 takes the form of 16 megabytes of semiconductor RAM memory. Secondary storage 40 takes the form of long term storage, such as ROM,
optical or magnetic disks, flash memory, or tape. Those skilled in the art will
20 appreciate that memory system 24 may comprise many other alternative components.

The input and output devices 26, 28 are also familiar. The input device 26 can comprise a keyboard, a mouse, a physical transducer (e.g., a microphone), etc. The output device 28 can comprise a display, a printer, a transducer (e.g. a speaker), etc. Some devices, such as a network interface or a modem, can be used as input
25 and/or output devices.

As is familiar to those skilled in the art, the computer system 20 further includes an operating system and at least one application program. The operating system is the set of software which controls the computer system's operation and the allocation of resources. The application program is the set of software that performs
30 a task desired by the user, making use of computer resources made available through the operating system. Both are resident in the illustrated memory system 24.

In accordance with the practices of persons skilled in the art of computer programming, the present invention is described below with reference to symbolic representations of operations that are performed by computer system 20, unless indicated otherwise. Such operations are sometimes referred to as being
5 computer-executed. It will be appreciated that the operations which are symbolically represented include the manipulation by CPU 22 of electrical signals representing data bits and the maintenance of data bits at memory locations in memory system 24, as well as other processing of signals. The memory locations where data bits are maintained are physical locations that have particular electrical, magnetic, or optical
10 properties corresponding to the data bits.

Figs. 2A and 2B are simplified representations of a display screen 50 of a video display device 52 (e.g., a television or a computer monitor) showing two successive image frames 54a and 54b of a video image sequence represented electronically by a corresponding video signal. Video signals may be in any of a
15 variety of video signal formats including analog television video formats such as NTSC, PAL, and SECAM, and pixelated or digitized video signal formats typically used in computer displays, such as VGA, CGA, and EGA. Preferably, the video signals corresponding to image frames are of a digitized video signal format, either as originally generated or by conversion from an analog video signal format, as is
20 known in the art.

Image frames 54a and 54b each include a rectangular solid image feature 56 and a pyramid image feature 58 that are positioned over a background 60. Image features 56 and 58 in image frames 54a and 54b have different appearances because different parts are obscured and shown. For purposes of the following description,
25 the particular form of an image feature in an image frame is referred to as an object or, alternatively, a mask. Accordingly, rectangular solid image feature 56 is shown as rectangular solid objects 56a and 56b in respective image frames 54a and 54b, and pyramid image feature 58 is shown as pyramid objects 58a and 58b in respective image frames 54a and 54b.

30 Pyramid image feature 58 is shown with the same position and orientation in image frames 54a and 54b and would "appear" to be motionless when shown in the

video sequence. Rectangular solid 56 is shown in frames 54a and 54b with a different orientation and position relative to pyramid 58 and would "appear" to be moving and rotating relative to pyramid 58 when shown in the video sequence. These appearances of image features 58 and 60 are figurative and exaggerated. The image frames of a video sequence typically are displayed at rates in the range of 30-80 Hz. Human perception of video motion typically requires more than two image frames. Image frames 54a and 54b provide, therefore, a simplified representation of a conventional video sequence for purposes of illustrating the present invention. Moreover, it will be appreciated that the present invention is in no way limited to such simplified video images, image features, or sequences and, to the contrary, is applicable to video images and sequences of arbitrary complexity.

VIDEO COMPRESSION ENCODER PROCESS OVERVIEW

Fig. 3A is a generalized functional block diagram of a video compression encoder process 64 for compressing digitized video signals representing display motion in video sequences of multiple image frames. Compression of video information (i.e., video sequences or signals) can provide economical storage and transmission of digital video information in applications that include, for example, interactive or digital television and multimedia computer applications. For purposes of brevity, the reference numerals assigned to function blocks of encoder process 64 are used interchangeably in reference to the results generated by the function blocks.

Conventional video compression techniques utilize similarities between successive image frames, referred to as temporal or interframe correlation, to provide interframe compression in which pixel-based representations of image frames are converted to motion representations. In addition, conventional video compression techniques utilize similarities within image frames, referred to as spatial or intraframe correlation, to provide intraframe compression in which the motion representations within an image frame are further compressed.

In such conventional video compression techniques, including MPEG-1, MPEG-2, and H.26X, the temporal and spatial correlations are determined relative to simple translations of fixed, regular (e.g., square) arrays of pixels. Video

information commonly includes, however, arbitrary video motion that cannot be represented accurately by translating square arrays of pixels. As a consequence, conventional video compression techniques typically include significant error components that limit the compression rate and accuracy.

- 5 In contrast, encoder process 64 utilizes object-based video compression to improve the accuracy and versatility of encoding interframe motion and intraframe image features. Encoder process 64 compresses video information relative to objects of arbitrary configurations, rather than fixed, regular arrays of pixels. This reduces the error components and thereby improves the compression efficiency and accuracy.
- 10 As another benefit, object-based video compression provides interactive video editing capabilities for processing compressed video information.

Referring to Fig. 3A, function block 66 indicates that user-defined objects within image frames of a video sequence are segmented from other objects within the image frames. The objects may be of arbitrary configuration and preferably represent distinct image features in a display image. Segmentation includes

15 identifying the pixels in the image frames corresponding to the objects. The user-defined objects are defined in each of the image frames in the video sequence. In Figs. 2A and 2B, for example, rectangular solid objects 56a and 56b and pyramid objects 58a and 58b are separately segmented.

- 20 The segmented objects are represented by binary or multi-bit (e.g., 8-bit) "alphachannel" masks of the objects. The object masks indicate the size, configuration, and position of an object on a pixel-by-pixel basis. For purposes of simplicity, the following description is directed to binary masks in which each pixel of the object is represented by a single binary bit rather than the typical 24-bits (i.e.,
- 25 8 bits for each of three color component values). Multi-bit (e.g., 8-bit) masks also have been used.

Function block 68 indicates that "feature points" of each object are defined by a user. Feature points preferably are distinctive features or aspects of the object. For example, corners 70a-70c and corners 72a-72c could be defined by a user as

30 feature points of rectangular solid 56 and pyramid 58, respectively. The pixels corresponding to each object mask and its feature points in each image frame are

stored in an object database included in memory system 24.

Function block 74 indicates that changes in the positions of feature points in successive image frames are identified and trajectories determined for the feature points between successive image frames. The trajectories represent the direction and extent of movement of the feature points. Function block 76 indicates that trajectories of the feature points in the object between prior frame N-1 and current frame N also is retrieved from the object data base.

Function block 78 indicates that a sparse motion transformation is determined for the object between prior frame N-1 and current frame N. The sparse motion transformation is based upon the feature point trajectories between frames N-1 and N. The sparse motion transformation provides an approximation of the change of the object between prior frame N-1 and current frame N.

Function block 80 indicates that a mask of an object in a current frame N is retrieved from the object data base in memory system 24.

Function block 90 indicates that a quantized master object or "sprite" is formed from the objects or masks 66 corresponding to an image feature in an image frame sequence and feature point trajectories 74. The master object preferably includes all of the aspects or features of an object as it is represented in multiple frames. With reference to Figs. 2A and 2B, for example, rectangular solid 56 in frame 54b includes a side 78b not shown in frame 54a. Similarly, rectangular solid 56 includes a side 78a in frame 54a not shown in frame 54b. The master object for rectangular solid 56 includes both sides 78a and 78b.

Sparse motion transformation 78 frequently will not provide a complete representation of the change in the object between frames N-1 and N. For example, an object in a prior frame N-1, such as rectangular object 54a, might not include all the features of the object in the current frame N, such as side 78b of rectangular object 54b.

To improve the accuracy of the transformation, therefore, an intersection of the masks of the object in prior frame N-1 and current frame N is determined, such as by a logical AND function as is known in the art. The mask of the object in the current frame N is subtracted from the resulting intersection to identify any portions

or features of the object in the current frame N not included in the object in the prior frame N-1 (e.g., side 78b of rectangular object 54b, as described above). The newly identified portions of the object are incorporated into master object 90 so that it includes a complete representation of the object in frames N-1 and N.

5 Function block 96 indicates that a quantized form of an object 98 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) is transformed by a dense motion transformation to provide a predicted form of the object 102 in a current frame N (e.g., rectangular solid object 56b in image frame 54b). This transformation provides object-based interframe compression.

10 The dense motion transformation preferably includes determining an affine transformation between quantized prior object 98 in frame N-1 and the object in the current frame N and applying the affine transformation to quantized prior object 98. The preferred affine transformation is represented by affine transformation coefficients 104 and is capable of describing translation, rotation, magnification, and
15 shear. The affine transformation is determined from a dense motion estimation, preferably including a pixel-by-pixel mapping, between prior quantized object 98 and the object in the current frame N.

 Predicted current object 102 is represented by quantized prior object 98, as modified by dense motion transformation 96, and is capable of representing
20 relatively complex motion, together with any new image aspects obtained from master object 90. Such object-based representations are relatively accurate because the perceptual and spatial continuity associated with objects eliminates errors arising from the typically changing relationships between different objects in different image frames. Moreover, the object-based representations allow a user to represent
25 different objects with different levels of resolution to optimize the relative efficiency and accuracy for representing objects of varying complexity.

 Function block 106 indicates that for image frame N, predicted current object 102 is subtracted from original object 108 for current frame N to determine an estimated error 110 in predicted object 102. Estimated error 110 is a compressed
30 representation of current object 108 in image frame N relative to quantized prior object 98. More specifically, current object 108 may be decoded or reconstructed

from estimated error 110 and quantized prior object 98.

Function block 112 indicates that estimated error 110 is compressed or “coded” by a conventional “lossy” still image compression method such as lattice subband or other wavelet compression or encoding as described in Multirate Systems and Filter Banks by Vaidyanathan, PTR Prentice-Hall, Inc., Englewood Cliffs, New Jersey, (1993) or discrete cosine transform (DCT) encoding as described in JPEG: Still Image Data Compression Standard by Pennebaker et al., Van Nostrand Reinhold, New York (1993).

As is known in the art, “lossy” compression methods introduce some data distortion to provide increased data compression. The data distortion refers to variations between the original data before compression and the data resulting after compression and decompression. For purposes of illustration below, the compression or encoding of function block 102 is presumed to be wavelet encoding.

Function block 114 indicates that the wavelet encoded estimated error from function block 112 is further compressed or “coded” by a conventional “lossless” still image compression method to form compressed data 116. A preferred conventional “lossless” still image compression method is entropy encoding as described in JPEG: Still Image Data Compression Standard by Pennebaker et al. As is known in the art, “lossless” compression methods introduce no data distortion.

An error feedback loop 118 utilizes the wavelet encoded estimated error from function block 112 for the object in frame N to obtain a prior quantized object for succeeding frame N+1. As an initial step in feedback loop 118, function block 120 indicates that the wavelet encoded estimated error from function block 112 is inverse wavelet coded, or wavelet decoded, to form a quantized error 122 for the object in image frame N.

The effect of successively encoding and decoding estimated error 110 by a lossy still image compression method is to omit from quantized error 122 video information that is generally imperceptible by viewers. This information typically is of higher frequencies. As a result, omitting such higher frequency components typically can provide image compression of up to about 200% with only minimal degradation of image quality.

Function block 124 indicates that quantized error 122 and predicted object 102, both for image frame N, are added together to form a quantized object 126 for image frame N. After a timing coordination delay 128, quantized object 126 becomes quantized prior object 98 and is used as the basis for processing the
5 corresponding object in image frame N+1.

Encoder process 64 utilizes the temporal correlation of corresponding objects in successive image frames to obtain improved interframe compression, and also utilizes the spatial correlation within objects to obtain accurate and efficient intraframe compression. For the interframe compression, motion estimation and
10 compensation are performed so that an object defined in one frame can be estimated in a successive frame. The motion-based estimation of the object in the successive frame requires significantly less information than a conventional block-based representation of the object. For the intraframe compression, an estimated error
15 signal for each object is compressed to utilize the spatial correlation of the object within a frame and to allow different objects to be represented at different resolutions. Feedback loop 118 allows objects in subsequent frames to be predicted from fully decompressed objects, thereby preventing accumulation of estimation error.

Encoder process 64 provides as an output a compressed or encoded
20 representation of a digitized video signal representing display motion in video sequences of multiple image frames. The compressed or encoded representation includes object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116. The encoded representation may be stored or
25 transmitted, according to the particular application in which the video information is used.

Fig. 3B is a functional block diagram of a master object encoder process 130 for encoding or compressing master object 90. Function block 132 indicates that master object 90 is compressed or coded by a conventional "lossy" still image compression method such as lattice subband or other wavelet compression or discrete
30 cosine transform (DCT) encoding. Preferably, function block 132 employs wavelet encoding.

Function block 134 indicates that the wavelet encoded master object from function block 132 is further compressed or coded by a conventional "lossless" still image compression method to form compressed master object data 136. A preferred conventional lossless still image compression method is entropy encoding.

5 Encoder process 130 provides as an output compressed master object 136. Together with the compressed or encoded representations provided by encoder process 64, compressed master object 136 may be decompressed or decoded after storage or transmission to obtain a video sequence of multiple image frames.

Encoder process 64 is described with reference to encoding video information
10 corresponding to a single object within an image frame. As shown in Figs. 2A and 2B and indicated above, encoder process 64 is performed separately for each of the objects (e.g., objects 56 and 58 of Figs. 2A and 2B) in an image frame. Moreover, many video images include a background over which arbitrary numbers of image features or objects are rendered. Preferably, the background is processed as an
15 object according to this invention after all user-designated objects are processed.

Processing of the objects in an image frame requires that the objects be separately identified. Preferably, encoder process 64 is applied to the objects of an image frame beginning with the forward-most object or objects and proceeding successively to the back-most object (e.g., the background). The compositing of the
20 encoded objects into a video image preferably proceeds from the rear-most object (e.g., the background) and proceeds successively to the forward-most object (e.g., rectangular solid 56 in Figs. 2A and 2B). The layering of encoding objects may be communicated as distinct layering data associated with the objects of an image frame or, alternatively, by transmitting or obtaining the encoded objects in a sequence
25 corresponding to the layering or compositing sequence.

OBJECT SEGMENTATION AND TRACKING

In a preferred embodiment, the segmentation of objects within image frames referred to in function block 66 allows interactive segmentation by users. The object
30 segmentation of this invention provides improved accuracy in segmenting objects and is relatively fast and provides users with optimal flexibility in defining objects to

be segmented.

Fig. 4 is a functional block diagram of an object segmentation process 140 for segmenting selected objects from an image frame of a video sequence. Object segmentation according to process 140 provides a perceptual grouping of objects that is accurate and quick and easy for users to define.

Fig. 5A is simplified representation of display screen 50 of video display device 52 showing image frame 54a and the segmentation of rectangular solid object 56a. In its rendering on display screen 50, rectangular solid object 56a includes an object perimeter 142 (shown spaced apart from object 56a for clarity) that bounds an object interior 144. Object interior 144 refers to the outline of object 56a on display screen 50 and in general may correspond to an inner surface or, as shown, an outer surface of the image feature. Fig. 5B is an enlarged representation of a portion of display screen 50 showing the semi-automatic segmentation of rectangular solid object 56a. The following description is made with specific reference to rectangular solid object 56a, but is similarly applicable to each object to be segmented from an image frame.

Function block 146 indicates that a user forms within object interior 144 an interior outline 148 of object perimeter 142. The user preferably forms interior outline 148 with a conventional pointer or cursor control device, such as a mouse or trackball. Interior outline 148 is formed within a nominal distance 150 from object perimeter 142. Nominal distance 150 is selected by a user to be sufficiently large that the user can form interior outline 148 relatively quickly within nominal distance 150 of perimeter 142. Nominal distance 150 corresponds, for example, to between about 4 and 10 pixels.

Function block 146 is performed in connection with a key frame of a video sequence. With reference to a scene in a conventional motion picture, for example, the key frame could be the first frame of the multiple frames in a scene. The participation of the user in this function renders object segmentation process 140 semi-automatic, but significantly increases the accuracy and flexibility with which objects are segmented. Other than for the key frame, objects in subsequent image frames are segmented automatically as described below in greater detail.

Function block 152 indicates that interior outline 148 is expanded automatically to form an exterior outline 156. The formation of exterior outline 156 is performed as a relatively simple image magnification of outline 148 so that exterior outline 156 is a user-defined number of pixels from interior outline 148.

- 5 Preferably, the distance between interior outline 148 and exterior outline 156 is approximately twice distance 150.

Function block 158 indicates that pixels between interior outline 148 and exterior outline 156 are classified according to predefined attributes as to whether they are within object interior 144, thereby to identify automatically object perimeter 10 142 and a corresponding mask 80 of the type described with reference to Fig. 3A. Preferably, the image attributes include pixel color and position, but either attribute could be used alone or with other attributes.

In the preferred embodiment, each of the pixels in interior outline 148 and exterior outline 156 defines a "cluster center" represented as a five-dimensional 15 vector in the form of (r, g, b, x, y) . The terms $r, g,$ and b correspond to the respective red, green, and blue color components associated with each of the pixels, and the terms x and y correspond to the pixel locations. The m -number of cluster center vectors corresponding to pixels in interior outline 148 are denoted as $\{I_0, I_1, \dots, I_{m-1}\}$, and the n -number of cluster center vectors corresponding pixels in exterior 20 outline 156 are denoted as $\{O_0, O_1, \dots, O_{n-1}\}$.

Pixels between the cluster center vectors I_i and O_j are classified by identifying the vector to which each pixel is closest in the five-dimensional vector space. For each pixel, the absolute distance d_i and d_j to each of respective cluster center vectors I_i and O_j is computed according to the following equations:

25
$$d_i = w_{\text{color}}(|r - r_i| + |g - g_i| + |b - b_i|) + w_{\text{coord}}(|x - x_i| + |y - y_i|), \quad 0 \leq i < m,$$

$$d_j = w_{\text{color}}(|r - r_j| + |g - g_j| + |b - b_j|) + w_{\text{coord}}(|x - x_j| + |y - y_j|), \quad 0 \leq j < n,$$

in which w_{color} and w_{coord} are weighting factors for the respective color and pixel position information. Weighting factors w_{color} and w_{coord} are of values having a sum of 1 and otherwise selectable by a user. Preferably, weighting factors w_{color} and 30 w_{coord} are of an equal value of 0.5. Each pixel is associated with object interior 144 or exterior according to the minimum five-dimensional distance to one of the cluster

center vectors I_i and O_j .

Function block 162 indicates that a user selects at least two, and preferable more (e.g. 4 to 6), feature points in each object of an initial or key frame.

Preferably, the feature points are relatively distinctive aspects of the object. With
5 reference to rectangular solid image feature 56, for example, corners 70a-70c could be selected as feature points.

Function block 164 indicates that a block 166 of multiple pixels centered about each selected feature point (e.g., corners 70a-70c) is defined and matched to a corresponding block in a subsequent image frame (e.g., the next successive image
10 frame). Pixel block 166 is user defined, but preferably includes a 32 x 32 pixel array that includes only pixels within image interior 144. Any pixels 168 (indicated by cross-hatching) of pixel block 166 falling outside object interior 144 as determined by function block 158 (e.g., corners 70b and 70c) are omitted. Pixel blocks 166 are matched to the corresponding pixel blocks in the next image frame
15 according to a minimum absolute error identified by a conventional block match process or a polygon match process, as described below in greater detail.

Function block 170 indicates that a sparse motion transformation of an object is determined from the corresponding feature points in two successive image frames. Function block 172 indicates that mask 80 of the current image frame is transformed
20 according to the sparse motion transformation to provide an estimation of the mask 80 for the next image frame. Any feature point in a current frame not identified in a successive image frame is disregarded.

Function block 174 indicates that the resulting estimation of mask 80 for the next image frame is delayed by one frame, and functions as an outline 176 for a
25 next successive cycle. Similarly, function block 178 indicates that the corresponding feature points also are delayed by one frame, and utilized as the initial feature points 180 for the next successive frame.

POLYGON MATCH METHOD

Fig. 6 is a functional block diagram of a polygon match process 200 for determining a motion vector for each corresponding pair of pixels in successive image frames. Such a dense motion vector determination provides the basis for
5 determining the dense motion transformations 96 of Fig. 3A.

Polygon match process 200 is capable of determining extensive motion between successive image frames like the conventional block match process. In contrast to the conventional block match process, however, polygon match process 200 maintains its accuracy for pixels located near or at an object perimeter and
10 generates significantly less error. A preferred embodiment of polygon match method 200 has improved computational efficiency.

Polygon block method 200 is described with reference to Figs. 7A and 7B, which are simplified representations of display screen 50 showing two successive image frames 202a and 202b in which an image feature 204 is rendered as objects
15 204a and 204b, respectively.

Function block 206 indicates that objects 204a and 204b for image frames 202a and 202b are identified and segmented by, for example, object segmentation method 140.

Function block 208 indicates that dimensions are determined for a pixel block
20 210b (e.g., 15x15 pixels) to be applied to object 204b and a search area 212 about object 204a. Pixel block 210b defines a region about each pixel in object 204b for which region a corresponding pixel block 210a is identified in object 204a. Search area 212 establishes a region within which corresponding pixel block 210a is sought. Preferably, pixel block 210b and search area 212 are right regular arrays of pixels
25 and of sizes defined by the user.

Function block 214 indicates that an initial pixel 216 in object 204b is identified and designated the current pixel. Initial pixel 216 may be defined by any of a variety of criteria such as, for example, the pixel at the location of greatest vertical extent and minimum horizontal extent. With the pixels on display screen 50
30 arranged according to a coordinate axis 220 as shown, initial pixel 216 may be represented as the pixel of object 214b having a maximum y-coordinate value and a

-21-

minimum x-coordinate value.

Function block 222 indicates that pixel block 210b is centered at and extends about the current pixel.

Function block 224 represents an inquiry as to whether pixel block 210b includes pixels that are not included in object 204b (e.g., pixels 226 shown by cross-hatching in Fig. 7B). This inquiry is made with reference to the objects identified according to function block 206. Whenever pixels within pixel block 210b positioned at the current pixel fall outside object 204b, function block 224 proceeds to function block 228 and otherwise proceeds to function block 232.

Function block 228 indicates that pixels of pixel block 210b falling outside object 204b (e.g., pixels 226) are omitted from the region defined by pixel block 210b so that it includes only pixels within object 204b. As a result, pixel block 210b defines a region that typically would be of a polygonal shape more complex than the originally defined square or rectangular region.

Function block 232 indicates that a pixel in object 204a is identified as corresponding to the current pixel in object 204b. The pixel in object 204a is referred to as the prior corresponding pixel. Preferably, the prior corresponding pixel is identified by forming a pixel block 210a about each pixel in search area 212 and determining a correlation between the pixel block 210a and pixel block 210b about the current pixel in object 204b. Each correlation between pixel blocks 210a and 210b may be determined, for example, by an absolute error. The prior corresponding pixel is identified by identifying the pixel block 210a in search area 212 for which the absolute error relative to pixel block 210b is minimized. A summed absolute error E for a pixel block 210a relative to pixel block 210b may be determined as:

$$E = \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} (|r_{ij} - r'_{ij}| + |g_{ij} - g'_{ij}| + |b_{ij} - b'_{ij}|),$$

in which the terms r_{ij} , g_{ij} , and b_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210b and the terms r'_{ij} , g'_{ij} , and b'_{ij} correspond to the respective red, green, and blue color components associated with each of the pixels in pixel block 210a.

As set forth above, the summations for the absolute error E imply pixel blocks having pixel arrays having $m \times n$ pixel dimensions. Pixel blocks 210b of polygonal configuration are accommodated relatively simply by, for example, defining zero values for the color components of all pixels outside polygonal pixel blocks 210b.

Function block 234 indicates that a motion vector MV between each pixel in object 204b and the corresponding prior pixel in object 204a is determined. A motion vector is defined as the difference between the locations of the pixel in object 204b and the corresponding prior pixel in object 204a:

$$MV = (x_i - x_k', y_j - y_l'),$$

in which the terms x_i and y_j correspond to the respective x- and y-coordinate positions of the pixel in pixel block 210b, and the terms x_k' and y_l' correspond to the respective x- and y-coordinate positions of the corresponding prior pixel in pixel block 210a.

Function block 236 represents an inquiry as to whether object 204b includes any remaining pixels. Whenever object 204b includes remaining pixels, function block 236 proceeds to function block 238 and otherwise proceeds to end block 240.

Function block 238 indicates that a next pixel in object 204b is identified according to a predetermined format or sequence. With the initial pixel selected as described above in reference to function block 214, subsequent pixels may be defined by first identifying the next adjacent pixel in a row (i.e., of a common y-coordinate value) and, if object 204 includes no other pixels in a row, proceeding to the first or left-most pixel (i.e., of minimum x-coordinate value) in a next lower row. The pixel so identified is designated the current pixel and function block 238 returns to function block 222.

Polygon block method 200 accurately identifies corresponding pixels even if they are located at or near an object perimeter. A significant source of error in conventional block matching processes is eliminated by omitting or disregarding pixels of pixel blocks 210b falling outside object 204b. Conventional block matching processes rigidly apply a uniform pixel block configuration and are not applied with reference to a segmented object. The uniform block configurations

cause significant errors for pixels adjacent the perimeter of an object because the pixels outside the object can undergo significant changes as the object moves or its background changes. With such extraneous pixel variations included in conventional block matching processes, pixels in the vicinity of an object perimeter cannot be correlated accurately with the corresponding pixels in prior image frames.

For each pixel in object 204b, a corresponding prior pixel in object 204a is identified by comparing pixel block 210b with a pixel block 210a for each of the pixels in prior object 204a. The corresponding prior pixel is the pixel in object 204a having the pixel block 210a that best correlates to pixel block 210b. If processed in a conventional manner, such a determination can require substantial computation to identify each corresponding prior pixel. To illustrate, for pixel blocks having dimensions of $n \times n$ pixels, which are significantly smaller than a search area 212 having dimensions of $m \times m$ pixels, approximately $n^2 \times m^2$ calculations are required to identify each corresponding prior pixel in the prior object 204a.

PIXEL BLOCK CORRELATION PROCESS

Fig. 8 is a functional block diagram of a modified pixel block correlation process 260 that preferably is substituted for the one described with reference to function block 232. Modified correlation process 260 utilizes redundancy inherent in correlating pixel blocks 210b and 210a to significantly reduce the number of calculations required.

Correlation process 260 is described with reference to Figs. 9A-9G and 10A-10G, which schematically represent arbitrary groups of pixels corresponding to successive image frames 202a and 202b. In particular, Fig. 9A is a schematic representation of a pixel block 262 having dimensions of 5×5 pixels in which each letter corresponds to a different pixel. The pixels of pixel block 262 are arranged as a right regular array of pixels that includes distinct columns 264. Fig. 9B represents an array of pixels 266 having dimensions of $q \times q$ pixels and corresponding to a search area 212 in a prior image frame 202a. Each of the numerals in Fig. 9B represents a different pixel. Although described with reference to a conventional right regular pixel block 262, correlation process 260 is similarly applicable to

polygonal pixel blocks of the type described with reference to polygon match process 200.

Function block 268 indicates that an initial pixel block (e.g., pixel block 262) is defined with respect to a central pixel M and scanned across a search area 212 (e.g., pixel array 266) generally in a raster pattern (partly shown in Fig. 7A) as in a conventional block match process. Figs. 9C-9G schematically illustrate five of the approximately q^2 steps in the block matching process between pixel block 262 and pixel array 266.

Although the scanning of pixel block 262 across pixel array 266 is performed in a conventional manner, computations relating to the correlation between them are performed differently according to this invention. In particular, a correlation (e.g., an absolute error) is determined and stored for each column 264 of pixel block 262 in each scan position. The correlation that is determined and stored for each column 264 of pixel block 262 in each scanned position is referred to as a column correlation 270, several of which are symbolically indicated in Figs. 9C-9G by referring to the correlated pixels. To illustrate, Fig. 9C shows a column correlation 270(1) that is determined for the single column 264 of pixel block 262 aligned with pixel array 266. Similarly, Fig. 9D shows column correlations 270(2) and 270(3) that are determined for the two columns 264 of pixel block 262 aligned with pixel array 266. Figs. 9E-9G show similar column correlations with pixel block 262 at three exemplary subsequent scan positions relative to pixel array 266.

The scanning of initial pixel block 262 over pixel array 266 provides a stored array or database of column correlations. With pixel block 262 having r-number of columns 264, and pixel array 266 having qxq pixels, the column correlation database includes approximately rq^2 number of column correlations. This number of column correlations is only approximate because pixel block 262 preferably is initially scanned across pixel array 266 such that pixel M is aligned with the first row of pixels in pixel array 266.

The remaining steps beginning with the one indicated in Fig. 9C occur after two complete scans of pixel block 262 across pixel array 266 (i.e., with pixel M aligned with the first and second rows of pixel array 266).

Function block 274 indicates that a next pixel block 276 (Fig. 10A) is defined from, for example, image frame 202b with respect to a central pixel N in the same row as pixel M. Pixel block 276 includes a column 278 of pixels not included in pixel block 262 and columns 280 of pixels included in pixel block 262. Pixel
5 block 276 does not include a column 282 (Fig. 9A) that was included in pixel block 262. Such an incremental definition of next pixel block 276 is substantially the same as that used in conventional block matching processes.

Function block 284 indicates that pixel block 276 is scanned across pixel array 266 in the manner described above with reference to function block 268. As
10 with Figs. 9C-9G, Figs. 10B-10G represent the scanning of pixel block 276 across pixel array 266.

Function block 286 indicates that for column 278 a column correlation is determined and stored at each scan position. Accordingly, column correlations 288(1)-288(5) are made with respect to the scanned positions of column 278 shown
15 in respective Figs. 10B-10F.

Function block 290 indicates that for each of columns 280 in pixel block 276 a stored column determination is retrieved for each scan position previously computed and stored in function block 268. For example, column correlation 270(1) of Fig. 9C is the same as column correlation 270'(1) of Fig. 10C. Similarly, column
20 correlations 270'(2), 270'(3), 270'(5)-270'(8), and 270'(15)-270'(18) of Figs. 10D-10F are the same as the corresponding column correlations in Figs. 9D, 9E, and 9G. For pixel block 276, therefore, only one column correlation 288 is calculated for each scan position. As a result, the number of calculations required for pixel block 276 is reduced by nearly 80 percent.

Function block 292 indicates that a subsequent pixel block 294 (Fig. 11A) is defined with respect to a central pixel R in the next successive row relative to pixel M. Pixel block 294 includes columns 296 of pixels that are similar to but distinct from columns 264 of pixels in pixel block 262 of Fig. 9A. In particular, columns 296 include pixels A'-E' not included in columns 264. Such an incremental
30 definition of subsequent pixel block 294 is substantially the same as that used in conventional block matching processes.

Function block 298 indicates that pixel block 294 is scanned across pixel array 266 (Fig. 9B) in the manner described above with reference to function blocks 268 and 276. Figs. 11B-11F represent the scanning of pixel block 294 across pixel array 266.

5 Function block 300 indicates that a column correlation is determined and stored for each of columns 296. Accordingly, column correlations 302(1)-302(18) are made with respect to the scanned positions of columns 296 shown in Figs. 11B-11F.

10 Each of column correlations 302(1)-302(18) may be calculated in an abbreviated manner with reference to column correlations made with respect to pixel block 262 (Fig. 9A).

For example, column correlations 302(4)-302(8) of Fig. 11D include subcolumn correlations 304'(4)-304'(8) that are the same as subcolumn correlations 304(4)-304(8) of Fig. 9E. Accordingly, column correlations 302(4)-302(8) may be
15 determined from respective column correlations 270(4)-270(8) by subtracting from the latter correlation values for pixels 01A, 02B, 03C, 04D, and 05E to form subcolumn correlations 304(4)-304(8), respectively. Column correlations 302(4)-302(8) may be obtained by adding correlation values for the pixel pairs 56A', 57B', 58C', 59D' and 50E' to the respective subcolumn correlation values 304(4)-304(8),
20 respectively.

The determination of column correlations 302(4)-302(8) from respective column correlations 270(4)-270(8) entails subtracting individual pixel correlation values corresponding to the row of pixels A-E of pixel block 262 not included in pixel block 294, and adding pixel correlation values for the row of pixels A'-E'
25 included in pixel block 294 but not pixel block 262. This method substitutes for each of column correlations 302(4)-302(8), one subtraction and one addition for the five additions that would be required to determine each column correlation in a conventional manner. With pixel blocks of larger dimensions as are preferred, the improvement of this method over conventional calculation methods is even greater.
30 Conventional block matching processes identify only total block correlations for each scan position of initial pixel block 262 relative to pixel array 266. As a

-27-

consequence, all correlation values for all pixels must be calculated separately for each scan position. In contrast, correlation process 260 utilizes stored column correlations 270 to significantly reduce the number of calculations required. The improvements in speed and processor resource requirements provided by correlation process 260 more than offset the system requirements for storing the column correlations.

It will be appreciated that correlation process 260 has been described with reference to Figs. 9-11 to illustrate specific features of this invention. As shown in the illustrations, this invention includes recurring or cyclic features that are particularly suited to execution by a computer system. These recurring or cyclic features are dependent upon the dimensions of pixel blocks and pixel arrays and are well understood and can be implemented by persons skilled in the art.

MULTI-DIMENSIONAL TRANSFORMATION

Fig. 12 is a functional block diagram of a transformation method 350 that includes generating a multi-dimensional transformation between objects in first and second successive image frames and quantizing the mapping for transmission or storage. The multi-dimensional transformation preferably is utilized in connection with function block 96 of Fig. 3. Transformation method 350 is described with reference to Fig. 7A and Fig. 13, the latter of which like Fig. 7B is a simplified representation of display screen 50 showing image frame 202b in which image feature 204 is rendered as object 204b.

Transformation method 350 preferably provides a multi-dimensional affine transformation capable of representing complex motion that includes any or all of translation, rotation, magnification, and shear. Transformation method 350 provides a significant improvement over conventional video compression methods such as MPEG-1, MPEG-2, and H.26X, which are of only one dimension and represent only translation. In this regard, the dimensionality of a transformation refers to the number of coordinates in the generalized form of the transformation, as described below in greater detail. Increasing the accuracy with which complex motion is represented according to this invention results in fewer errors than by conventional

representations, thereby increasing compression efficiency.

Function block 352 indicates that a dense motion estimation of the pixels in objects 204a and 204b is determined. Preferably, the dense motion estimation is obtained by polygon match process 200. As described above, the dense motion
5 estimation includes motion vectors between pixels at coordinates (x_i, y_i) in object 204b of image frame 202b and corresponding pixels at locations (x_i', y_i') of object 204a in image frame 202a.

Function block 354 indicates that an array of transformation blocks 356 is defined to encompass object 204b. Preferably, transformation blocks 356 are right
10 regular arrays of pixels having dimensions of, for example, 32x32 pixels.

Function block 358 indicates that a multi-dimensional affine transformation is generated for each transformation block 356. Preferably, the affine transformations are of first order and represented as:

$$x_i' = ax_i + by_i + c$$

$$15 \quad y_i' = dx_i + ey_i + f,$$

and are determined with reference to all pixels for which the motion vectors have a relatively high confidence. These affine transformations are of two dimensions in that x_i and y_i are defined relative to two coordinates: x_i and y_i .

The relative confidence of the motion vectors refers to the accuracy with
20 which the motion vector between corresponding pixels can be determined uniquely relative to other pixels. For example, motion vectors between particular pixels that are in relatively large pixel arrays and are uniformly colored (e.g., black) cannot typically be determined accurately. In particular, for a black pixel in a first image frame, many pixels in the pixel array of the subsequent image frame will have the
25 same correlation (i.e., absolute value error between pixel blocks).

In contrast, pixel arrays in which pixels correspond to distinguishing features typically will have relatively high correlations for particular corresponding pixels in successive image frames.

The relatively high correlations are preferably represented as a minimal
30 absolute value error determination for particular pixel. Motion vectors of relatively high confidence may, therefore, be determined relative to such uniquely low error

values. For example, a high confidence motion vector may be defined as one in which the minimum absolute value error for the motion vector is less than the next greater error value associated with the pixel by a difference amount that is greater than a threshold difference amount. Alternatively, high confidence motion vectors
5 may be defined with respect to the second order derivative of the absolute error values upon which the correlations are determined. A second order derivative of more than a particular value would indicate a relatively high correlation between specific corresponding pixels.

With n-number of pixels with such high-confidence motion vectors, the
10 preferred affine transformation equations are solved with reference to n-number of corresponding pixels in image frames 202a and 202b. Images frames must include at least three corresponding pixels in image frames 202a and 202b with high confidence motion vectors to solve for the six unknown coefficients a, b, c, d, e, and f of the preferred affine transformation equations. With the preferred dimensions,
15 each of transformation blocks 356 includes 2^{10} pixels of which significant numbers typically have relatively high confidence motion vectors. Accordingly, the affine transformation equations are over-determined in that a significantly greater number of pixels are available to solve for the coefficients a, b, c, d, e, and f.

The resulting n-number of equations may be represented by the linear
20 algebraic expression:

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_n-1 & Y_n-1 & 1 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} = \begin{bmatrix} X'_0 \\ X'_1 \\ \cdot \\ \cdot \\ \cdot \\ X'_{N-1} \end{bmatrix}$$

$$\begin{bmatrix} X_0 & Y_0 & 1 \\ X_1 & Y_1 & 1 \\ X_1 & Y_1 & 1 \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ X_n-1 & Y_n-1 & 1 \end{bmatrix} \begin{bmatrix} d \\ e \\ f \end{bmatrix} = \begin{bmatrix} Y'_0 \\ Y'_1 \\ \cdot \\ \cdot \\ \cdot \\ Y'_{N-1} \end{bmatrix}$$

5

Preferably these equations are solved by a conventional singular value decomposition (SVD) method, which provides a minimal least-square error for the approximation of the dense motion vectors. A conventional SVD method is described, for example, in Numerical Recipes in C, by Press et al., Cambridge University Press, (1992).

10

As described above, the preferred two-dimensional affine transformation equations are capable of representing translation, rotation, magnification, and shear of transformation blocks 356 between successive image frames 202a and 202b. In contrast, conventional motion transformation methods used in prior compression standards employ simplified transformation equations of the form:

15

$$x_i' = x_i + g$$

$$y_i' = y_i + h$$

The prior simplified transformation equations represent motion by only two coefficients, g and h , which represents only one-third the amount of information (i.e., coefficients) obtained by the preferred multi-dimensional transformation equations. To obtain superior compression of the information obtained by transformation method 350 relative to conventional compression methods, the dimensions of transformation block 356 preferably are more than three times larger than the corresponding 16x16 pixel blocks employed in MPEG-1 and MPEG-2 compression methods. The preferred 32x32 pixel dimensions of transformation blocks 356 encompass four times the number of pixels employed in the transformation blocks of conventional transformation methods. The larger dimensions of transformation blocks 356, together with the improved accuracy with which the affine transformation coefficients represent motion of the transformation blocks 356, allow transformation method 350 to provide greater compression than conventional compression methods.

It will be appreciated that the affine coefficients generated according to the present invention typically would be non-integer, floating point values that could be difficult to compress adequately without adversely affecting their accuracy. Accordingly, it is preferable to quantize the affine transformation coefficient to reduce the bandwidth required to store or transmit them.

Function block 362 indicates that the affine transformation coefficients generated with reference to function block 358 are quantized to reduce the bandwidth required to store or transmit them. Fig. 14 is an enlarged fragmentary representation of a transformation block 356 showing three selected pixels, 364a, 364b, and 364c from which the six preferred affine transformation coefficients a - f may be determined.

Pixels 364a-364c are represented as pixel coordinates (x_1, y_1) , (x_2, y_2) , and (x_3, y_3) , respectively. Based upon the dense motion estimation of function block 352, pixels 364a-364c have respective corresponding pixels (x_1', y_1') , (y_2', y_2') , (x_3', y_3') in preceding image frame 202a. As is conventional, pixel locations (x_i, y_i) are

represented by integer values and are solutions to the affine transformation equations upon which the preferred affine transformation coefficients are based. Accordingly, selected pixels 364a-364c are used to calculate the corresponding pixels from the preceding image frame 202a, which typically will be floating point values.

5 Quantization of these floating point values is performed by converting to integer format the difference between corresponding pixels $(x_i - x'_i, y_i - y'_i)$. The affine transformation coefficients are determined by first calculating the pixel values (x'_i, y'_i) from the difference vectors and the pixel values (x_i, y_i) , and then solving the multi-dimensional transformation equations of function block 358 with respect to the
10 pixel values (x'_i, y'_i) .

As shown in Fig. 14, pixels 364a-364c preferably are distributed about transformation block 356 to minimize the sensitivity of the quantization to local variations within transformation block 356. Preferably, pixel 364a is positioned at or adjacent the center of transformation block 356, and pixels 364b and 364c are
15 positioned at upper corners. Also in the preferred embodiment, the selected pixels for each of the transformation blocks 356 in object 204b have the same positions, thereby allowing the quantization process to be performed efficiently.

Another aspect of the quantization method of function block 362 is that different levels of quantization may be used to represent varying degrees of motion.
20 As a result, relatively simple motion (e.g., translation) may be represented by fewer selected pixels 364 than are required to represent complex motion. With respect to the affine transformation equations described above, pixel 364a (x_i, y_i) from object 204b and the corresponding pixel (x'_i, y'_i) from object 204a are sufficient to solve simplified affine transformation equations of the form:

$$\begin{aligned} 25 \quad & x'_i = y_i + c \\ & y'_i = y_i + f, \end{aligned}$$

which represent translation between successive image frames. Pixel 364a specifically is used because its central position generally represents translational motion independent of the other types of motion. Accordingly, a user may
30 selectively represent simplified motion such as translation with simplified affine transformation equations that require one-third the data required to represent

complex motion.

Similarly, a pair of selected pixels (x_1, y_1) (e.g., pixel 364a) and (x_2, y_2) (i.e., either of pixels 364b and 364c) from object 204b and the corresponding pixels (x_1', y_1') and (x_2', y_2') from object 204a are sufficient to solve simplified affine

5 transformation equations of the form:

$$x_i' = ax_i + c$$

$$y_i' = ey_i + f,$$

which are capable of representing motions that include translation and magnification between successive image frames. In the simplified form:

10 $x' = a \cos \theta x + \sin \theta y + c$

$$y' = -\sin \theta x + a \cos \theta y + f$$

the corresponding pairs of selected pixels are capable of representing motions that include translation, rotation, and isotropic magnification. In this simplified form, the common coefficients of the x and y variables allow the equations to be solved by

15 two corresponding pairs of pixels.

Accordingly, a user may selectively represent moderately complex motion that includes translation, rotation, and magnification with partly simplified affine transformation equations. Such equations would require two-thirds the data required to represent complex motion. Adding the third selected pixel (x_3, y_3) from object
20 204b, the corresponding pixel (x_3', y_3') from object 204a, and the complete preferred affine transformation equations allows a user also to represent shear between successive image frames.

A preferred embodiment of transformation method 350 (Fig. 12) is described as using uniform transformation blocks 356 having dimensions of, for example,
25 32x32 pixels. The preferred multi-dimensional affine transformations described with reference to function block 358 are determined with reference to transformation blocks 356. It will be appreciated that the dimensions of transformation blocks 356 directly affect the compression ratio provided by this method.

Fewer transformation blocks 356 of relatively large dimensions are required
30 to represent transformations of an object between image frames than the number of transformation blocks 356 having smaller dimensions. A consequence of uniformly

large transformation blocks 356 is that correspondingly greater error can be introduced for each transformation block. Accordingly, uniformly sized transformation blocks 356 typically have moderate dimensions to balance these conflicting performance constraints.

5

TRANSFORMATION BLOCK OPTIMIZATION

Fig. 15 is a functional block diagram of a transformation block optimization method 370 that automatically selects transformation block dimensions that provide a minimal error threshold. Optimization method 370 is described with reference to
10 Fig. 16, which is a simplified representation of display screen 50 showing a portion of image frame 202b with object 204b.

Function block 372 indicates that an initial transformation block 374 is defined with respect to object 204b. Initial transformation block 374 preferably is of maximal dimensions that are selectable by a user and are, for example, 64x64 pixels.
15 Initial transformation block 374 is designated the current transformation block.

Function block 376 indicates that a current peak signal-to-noise ratio (SNR) is calculated with respect to the current transformation block. The signal-to-noise ratio preferably is calculated as the ratio of the variance of the color component values of the pixel within the current transformation block (i.e., the signal) to the
20 variance of the color components values of the pixels associated with estimated error 110 (Fig. 3).

Function block 378 indicates that the current transformation block (e.g., transformation block 374) is subdivided into, for example, four equal sub-blocks 380a-380d, affine transformations are determined for each of sub-blocks 380a-380d,
25 and a future signal-to-noise ratio is determined with respect to the affine transformations. The future signal-to-noise ratio is calculated in substantially the same manner as the current signal-to-noise ratio described with reference to function block 376.

Inquiry block 382 represents an inquiry as to whether the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than a user-selected threshold amount. This inquiry represents a determination that further
30

subdivision of the current transformation block (e.g., transformation block 374) would improve the accuracy of the affine transformations by at least the threshold amount. Whenever the future signal-to-noise ratio is greater than the current signal-to-noise ratio by more than the threshold amount, inquiry block 382 proceeds to
5 function block 384, and otherwise proceeds to function block 388.

Function block 384 indicates that sub-blocks 380a-380d are successively designated the current transformation block, and each are analyzed whether to be further subdivided. For purposes of illustration, sub-block 380a is designated the current transformation and processed according to function block 376 and further
10 sub-divided into sub-blocks 386a-386d. Function block 388 indicates that a next successive transformation block 374' is identified and designated an initial or current transformation block.

PRECOMPRESSION EXTRAPOLATION METHOD

15 Figs. 17A and B are a functional block diagram of a precompression extrapolation method 400 for extrapolating image features of arbitrary configuration to a predefined configuration to facilitate compression in accordance with function block 112 of encoder process 64 (both of Fig. 3). Extrapolation method 400 allows the compression of function block 112 to be performed in a conventional manner
20 such as DCT or lattice or other wavelet compression, as described above.

Conventional still image compression methods such as lattice or other wavelet compression or discrete cosine transforms (DCT) operate upon rectangular arrays of pixels. As described above, however, the methods of the present invention are applicable to image features or objects of arbitrary configuration. Extrapolating
25 such objects or image features to a rectangular pixel array configuration allows use of conventional still image compression methods such as lattice or other wavelet compression or DCT. Extrapolation method 400 is described below with reference to Figs. 18A-18D, which are representations of display screen 50 on which a simple object 402 is rendered to show various aspects of extrapolation method 400.

30 Function block 404 indicates that an extrapolation block boundary 406 is defined about object 402. Extrapolation block boundary 406 preferably is

rectangular. Referring to Fig. 18A, the formation of extrapolation block boundary 406 about object 402 is based upon an identification of a perimeter 408 of object 402 by, for example, object segmentation method 140 (Fig. 4). Extrapolation block boundary 406 is shown encompassing object 402 in its entirety for purposes of illustration. It will be appreciated that extrapolation block boundary 406 could alternatively encompass only a portion of object 402. As described with reference to object segmentation method 140, pixels included in object 402 have color component values that differ from those of pixels not included in object 402.

Function block 410 indicates that all pixels 412 bounded by extrapolation block boundary 406 and not included in object 402 are assigned a predefined value such as, for example, a zero value for each of the color components.

Function block 414 indicates that horizontal lines of pixels within extrapolation block boundary 406 are scanned to identify horizontal lines with horizontal pixel segments having both zero and non-zero color component values.

Function block 416 represents an inquiry as to whether the horizontal pixel segments having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18B, region 418 represents horizontal pixel segments having color component values of zero that are bounded at both ends by perimeter 408. Regions 420 represent horizontal pixel segments that have color component values of zero and are bounded at only one end by perimeter 408. Function block 416 proceeds to function block 426 for regions 418 in which the pixel segments have color component values of zero bounded at both ends by perimeter 408 of object 402, and otherwise proceeds to function block 422.

Function block 422 indicates that the pixels in each horizontal pixel segment of a region 420 is assigned the color component values of a pixel 424 (only exemplary ones shown) in the corresponding horizontal lines and perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in regions 420 are functionally related to the color component values of pixels 424.

Function block 426 indicates that the pixels in each horizontal pixel segment in region 418 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 428a and 428b that are

in the corresponding horizontal lines and on perimeter 408.

Function block 430 indicates that vertical lines of pixels within extrapolation block boundary 406 are scanned to identify vertical lines with vertical pixel segments having both zero and non-zero color component values.

5 Function block 432 represents an inquiry as to whether the vertical pixel segments in vertical lines having color component values of zero are bounded at both ends by perimeter 408 of object 402. Referring to Fig. 18C, region 434 represents vertical pixel segments having color component values of zero that are bounded at both ends by perimeter 408. Regions 436 represent vertical pixel
10 segments that have color component values of zero and are bounded at only one end by perimeter 408. Function block 432 proceeds to function block 444 for region 434 in which the vertical pixel segments have color component values of zero bounded at both ends by perimeter 408 of object 402, and otherwise proceeds to function block 438.

15 Function block 438 indicates that the pixels in each vertical pixel segment of region 436 are assigned the color component values of pixels 442 (only exemplary ones shown) in the vertical lines and perimeter 408 of object 402. Alternatively, the color component values assigned to the pixels in region 436 are functionally related to the color component values of pixels 442.

20 Function block 444 indicates that the pixels in each vertical pixel segment in region 434 are assigned color component values corresponding to, and preferably equal to, an average of the color component values of pixels 446a and 446b that are in the horizontal lines and on perimeter 408.

 Function block 448 indicates that pixels that are in both horizontal and
25 vertical pixel segments that are assigned color component values according to this method are assigned composite color component values that relate to, and preferably are the average of, the color component values otherwise assigned to the pixels according to their horizontal and vertical pixel segments.

 Examples of pixels assigned such composite color component values are
30 those pixels in regions 418 and 434.

Function block 450 indicates that regions 452 of pixels bounded by

-38-

extrapolation block boundary 406 and not intersecting perimeter 408 of object 402 along a horizontal or vertical line are assigned composite color component values that are related to, and preferably equal to the average of, the color component values assigned to adjacent pixels. Referring to Fig. 18D, each of pixels 454 in regions 452 is assigned a color component value that preferably is the average of the color component values of pixels 456a and 456b that are aligned with pixel 454 along respective horizontal and vertical lines and have non-zero color component values previously assigned by this method.

A benefit of object extrapolation process 400 is that it assigns smoothly varying color component values to pixels not included in object 402 and therefore optimizes the compression capabilities and accuracy of conventional still image compression methods. In contrast, prior art zero padding or mirror image methods, as described by Chang et al., "Transform Coding of Arbitrarily-Shaped Image Segments," ACM Multimedia, pp. 83-88, June, 1993, apply compression to extrapolated objects that are filled with pixels having zero color components values such as those applied in function block 410. The drastic image change that occurs between an object and the zero-padded regions introduces high frequency changes that are difficult to compress or introduce image artifacts upon compression. Object extrapolation method 400 overcomes such disadvantages.

20

ALTERNATIVE ENCODER METHOD

Fig. 19A is a functional block diagram of an encoder method 500 that employs a Laplacian pyramid encoder with unique filters that maintain nonlinear aspects of image features, such as edges, while also providing high compression. Conventional Laplacian pyramid encoders are described, for example, in the Laplacian Pyramid as a Compact Image Code by Burt and Adleson, IEEE Trans. Comm., Vol. 31, No. 4, pp. 532-540, April 1983. Encoder method 500 is capable of providing the encoding described with reference to function block 112 of video compression encoder process 64 shown in Fig. 3, as well as whenever else DCT or wavelet encoding is suggested or used. By way of example, encoder method 500 is described with reference to encoding of estimated error 110 (Fig. 3).

30

A first decimation filter 502 receives pixel information corresponding to an estimated error 110 (Fig. 3) and filters the pixels according to a filter criterion. In a conventional Laplacian pyramid method, the decimation filter is a low-pass filter such as a Gaussian weighting function. In accordance with encoder method 500, however, decimation filter 502 preferably employs a median filter and, more specifically, a 3x3 nonseparable median filter.

To illustrate, Fig. 20A is a simplified representation of the color component values for one color component (e.g., red) for an arbitrary set or array of pixels 504. Although described with particular reference to red color component values, this illustration is similarly applied to the green and blue color component values of pixels 504.

With reference to the preferred embodiment of decimation filter 502, filter blocks 506 having dimensions of 3x3 pixels are defined among pixels 504. For each pixel block 506, the median pixel intensity value is identified or selected. With reference to pixel blocks 506a-506c, for example, decimation filter 502 provides the respective values of 8, 9, and 10, which are listed as the first three pixels 512 in Fig. 20B.

It will be appreciated, however, that decimation filter 502 could employ other median filters according to this invention. Accordingly, for each group of pixels having associated color component values of $\{a_0, a_1, \dots, a_{n-1}\}$ the median filter would select a median value a_M .

A first 2x2 down sampling filter 514 samples alternate pixels 512 in vertical and horizontal directions to provide additional compression. Fig. 20C represents a resulting compressed set of pixels 515.

A 2x2 up sample filter 516 inserts a pixel of zero value in place of each pixel 512 omitted by down sampling filter 514, and interpolation filter 518 assigns to the zero-value pixel a pixel value of an average of the opposed adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero value pixels. To illustrate, Fig. 20D represents a resulting set or array of value pixels 520.

A difference 522 is taken between the color component values of the set of

pixels 504 and the corresponding color component values for set of pixels 520 to form a zero-order image component I_0 .

A second decimation filter 526 receives color component values corresponding to the compressed set of pixels 515 generated by first 2x2 down sampling filter 514. Decimation filter 526 preferably is the same as decimation filter 502 (e.g., a 3x3 nonseparable median filter). Accordingly, decimation filter 526 functions in the same manner as decimation filter 502 and delivers a resulting compressed set or array of pixels (not shown) to a second 2x2 down sampling filter 528.

Down sampling filter 528 functions in the same manner as down sampling filter 514 and forms a second order image component L_2 that also is delivered to a 2x2 up sample filter 530 and an interpolation filter 531 that function in the same manner as up sample filter 516 and interpolation filter 518, respectively. A difference 532 is taken between the color component values of the set of pixels 515 and the resulting color component values provided by interpolation filter 531 to form a first-order image component I_1 .

The image components I_0 , I_1 , and L_2 are respective

$$nxn, \quad \frac{n}{2}x\frac{n}{2}, \quad \frac{n}{4}x\frac{n}{4}$$

sets of color component values that represent the color component values for an nxn array of pixels 504.

Image component I_0 maintains the high frequency components (e.g., edges) of an image represented by the original set of pixel 504. Image components I_1 and L_2 represent low frequency aspects of the original image. Image components I_0 , I_1 and L_2 provide relative compression of the original image. Image component I_0 and I_1 maintain high frequency features (e.g., edges) in a format that is highly compressible due to the relatively high correlation between the values of adjacent pixels. Image component L_2 is not readily compressible because it includes primarily low frequency image features, but is a set of relatively small size.

Fig. 19B is a functional block diagram of a decoder method 536 that decodes

-41-

or inverse encodes image components I_0 , I_1 , and L_2 generated by encoder method 500. Decoder method 536 includes a first 2x2 up sample filter 538 that receives image component L_2 and interposes a pixel of zero value between each adjacent pair of pixels. An interpolation filter 539 assigns to the zero-value pixel a pixel value
5 that preferably is an average of the values of the adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero-value pixels. First 2x2 up sample filter 538 operates in substantially the same manner as up sample filters 516 and 530 of Fig. 19A, and interpolation filter 539 operates in substantially the same manner as interpolation filters 518 and 531.

10 A sum 540 is determined between image component I_1 and the color component values corresponding to the decompressed set of pixels generated by first 2x2 up sample filter 538 and interpolation filter 539. A second 2x2 up sample filter 542 interposes a pixel of zero value between each adjacent pair of pixels generated by sum 540. An interpolation filter 543 assigns to the zero-value pixel a pixel value
15 that includes an average of the values of the adjacent pixels, or a previous assigned value if the zero-value pixel is not between an opposed pair of non-zero-value pixels. Up sample filter 542 and interpolation filter 543 are substantially the same as up sample filter 538 and interpolation filter 539, respectively.

A sum 544 sums the image component I_0 with the color component values
20 corresponding to the decompressed set of pixels generated by second 2x2 up sample filter 542 and interpolation filter 543. Sum 544 provides decompressed estimated error 110 corresponding to the estimated error 110 delivered to encoder process 500.

TRANSFORM CODING OF MOTION VECTORS

25 Conventional video compression encoder processes, such as MPEG-1 or MPEG-2, utilize only sparse motion vector fields to represent the motion of significantly larger pixel arrays of a regular size and configuration. The motion vector fields are sparse in that only one motion vector is used to represent the motion of a pixel array having dimensions of, for example, 16 x 16 pixels. The
30 sparse motion vector fields, together with transform encoding of underlying images or pixels by, for example, discrete cosine transform (DCT) encoding, provide

conventional video compression encoding.

In contrast, video compression encoding process 64 (Fig. 3) utilizes dense motion vector fields in which motion vectors are determined for all, or virtually all, pixels of an object. Such dense motion vector fields significantly improve the accuracy with which motion between corresponding pixels is represented. Although the increased accuracy can significantly reduce the errors associated with conventional sparse motion vector field representations, the additional information included in dense motion vector fields represent an increase in the amount of information representing a video sequence. In accordance with this invention, therefore, dense motion vector fields are themselves compressed or encoded to improve the compression ratio provided by this invention.

Fig. 21 is a functional block diagram of a motion vector encoding process 560 for encoding or compressing motion vector fields and, preferably, dense motion vector fields such as those generated in accordance with dense motion transformation 96 of Fig. 3. It will be appreciated that such dense motion vector fields from a selected object typically will have greater continuity or "smoothness" than the underlying pixels corresponding to the object. As a result, compression or encoding of the dense motion vector fields will attain a greater compression ratio than would compression or encoding of the underlying pixels.

Function block 562 indicates that a dense motion vector field is obtained for an object or a portion of an object in accordance with, for example, the processes of function block 96 described with reference to Fig. 3. Accordingly, the dense motion vector field will correspond to an object or other image portion of arbitrary configuration or size.

Function block 564 indicates that the configuration of the dense motion vector field is extrapolated to a regular, preferably rectangular, configuration to facilitate encoding or compression. Preferably, the dense motion vector field configuration is extrapolated to a regular configuration by precompression extrapolation method 400 described with reference to Figs. 17A and 17B. It will be appreciated that conventional extrapolation methods, such as a mirror image method, could alternatively be utilized.

Function block 566 indicates that the dense motion vector field with its extrapolated regular configuration is encoded or compressed according to conventional encoding transformations such as, for example, discrete cosine transformation (DCT) or lattice or other wavelet compression, the former of which is preferred.

Function block 568 indicates that the encoded dense motion vector field is further compressed or encoded by a conventional lossless still image compression method such as entropy encoding to form an encoded dense motion vector field 570. Such a still image compression method is described with reference to function block 114 of Fig. 3.

COMPRESSION OF QUANTIZED OBJECTS FROM PREVIOUS VIDEO FRAMES

Referring to Fig. 3A, video compression encoder process 64 uses quantized prior object 126 determined with reference to a prior frame N-1 to encode a corresponding object in a next successive frame N. As a consequence, encoder process 64 requires that quantized prior object 126 be stored in an accessible memory buffer. With conventional video display resolutions, such a memory buffer would require a capacity of at least one-half megabyte to store the quantized prior object 126 for a single video frame. Higher resolution display formats would require correspondingly larger memory buffers.

Fig. 22 is a functional block diagram of a quantized object encoder-decoder (codec) process 600 that compresses and selectively decompresses quantized prior objects 126 to reduce the required capacity of a quantized object memory buffer.

Function block 602 indicates that each quantized object 126 in an image frame is encoded on a block-by-block manner by a lossy encoding or compression method such as discrete cosine transform (DCT) encoding or lattice sub-band or other wavelet compression. As shown in Fig. 21, lossy encoded information can undergo additional lossless encoding. Alternatively, lossless encoding alone can be used.

Function block 604 indicates that the encoded or compressed quantized objects are stored in a memory buffer (not shown).

Function block 606 indicates that encoded quantized objects are retrieved from the memory buffer in anticipation of processing a corresponding object in a next successive video frame.

Function block 608 indicates that the encoded quantized object is inverse
5 encoded by, for example, DCT or wavelet decoding according to the encoding processes employed with respect to function block 602.

Codec process 600 allows the capacity of the corresponding memory buffer to be reduced by up to about 80%, depending upon the overall video compression ratio and the desired quality of the resultant video. Moreover, it will be appreciated
10 that codec process 600 is similarly applicable to the decoder process corresponding to video compression encoder process 64.

VIDEO COMPRESSION DECODER PROCESS OVERVIEW

Video compression encoder process 64 of Fig. 3 provides encoded or
15 compressed representations of video signals corresponding to video sequences of multiple image frames. The compressed representations include object masks 66, feature points 68, affine transform coefficients 104, and compressed error data 116 from encoder process 64 and compressed master objects 136 from encoder process 130. These compressed representations facilitate storage or transmission of video
20 information, and are capable of achieving compression ratios of up to 300 percent greater than those achievable by conventional video compression methods such as MPEG-2.

It will be appreciated, however, that retrieving such compressed video information from data storage or receiving transmission of the video information
25 requires that it be decoded or decompressed to reconstruct the original video signal so that it can be rendered by a display device such as video display device 52 (Figs. 2A and 2B). As with conventional encoding processes such as MPEG-1, MPEG-2, and H.26X, the decompression or decoding of the video information is substantially the inverse of the process by which the original video signal is encoded or
30 compressed.

Fig. 23A is a functional block diagram of a video compression decoder

process 700 for decompressing video information generated by video compression encoder process 64 of Fig. 3. For purposes of consistency with the description of encoder process 64, decoder process 700 is described with reference to Figs. 2A and 2B. Decoder process 700 retrieves from memory or receives as a transmission
5 encoded video information that includes object masks 66, feature points 68, compressed master objects 136, affine transform coefficients 104, and compressed error data 116.

Decoder process 700 performs operations that are the inverse of those of encoder process 64 (Fig. 3). Accordingly, each of the above-described preferred
10 operations of encoder process 64 having a decoding counterpart would similarly be inversed.

Function block 702 indicates that masks 66, feature points 68, transform coefficients 104, and compressed error data 116 are retrieved from memory or received as a transmission for processing by decoder process 700.

15 Fig. 23B is a functional block diagram of a master object decoder process 704 for decoding or decompressing compressed master object 136. Function block 706 indicates that compressed master object data 136 are entropy decoded by the inverse of the conventional lossless entropy encoding method in function block 134 of Fig. 3B. Function block 708 indicates that the entropy decoded master object
20 from function block 706 is decoded according to an inverse of the conventional lossy wavelet encoding process used in function block 132 of Fig. 3B.

Function block 712 indicates that dense motion transformations, preferably multi-dimensional affine transformations, are generated from affine coefficients 104. Preferably, affine coefficients 104 are quantized in accordance with transformation
25 method 350 (Fig. 12), and the affine transformations are generated from the quantized affine coefficients by performing the inverse of the operations described with reference to function block 362 (Fig. 12).

Function block 714 indicates that a quantized form of an object 716 in a prior frame N-1 (e.g., rectangular solid object 56a in image frame 54a) provided via
30 a timing delay 718 is transformed by the dense motion transformation to provide a predicted form of the object 720 in a current frame N (e.g., rectangular solid object

56b in image frame 54b).

Function block 722 indicates that for image frame N, predicted current object 720 is added to a quantized error 724 generated from compressed error data 116. In particular, function block 726 indicates that compressed error data 116 is decoded by
5 an inverse process to that of compression process 114 (Fig. 3A). In the preferred embodiment, function blocks 114 and 726 are based upon a conventional lossless still image compression method such as entropy encoding.

Function block 728 indicates that the entropy decoded error data from function block 726 is further decompressed or decoded by a conventional lossy still
10 image compression method corresponding to that utilized in function block 112 (Fig. 3A). In the preferred embodiment, the decompression or decoding of function block 728 is by a lattice subband or other wavelet process or a discrete cosine transform (DCT) process.

Function block 722 provides quantized object 730 for frame N as the sum of
15 predicted object 720 and quantized error 724, representing a reconstructed or decompressed object 732 that is delivered to function block 718 for reconstruction of the object in subsequent frames.

Function block 734 indicates that quantized object 732 is assembled with other objects of a current image frame N to form a decompressed video signal.
20

SIMPLIFIED CHAIN ENCODING

Masks, objects, sprites, and other graphical features, commonly are represented by their contours. As shown in and explained with reference to FIG. 5A, for example, rectangular solid object 56a is bounded by an object perimeter or
25 contour 142. A conventional process of encoding or compressing contours is referred to as chain encoding.

FIG. 24A shows a conventional eight-point chain code 800 from which contours on a conventional recta-linear pixel array are defined. Based upon a current pixel location X, a next successive pixel location in the contour extends in
30 one of directions 802a-802h. The chain code value for the next successive pixel is the numeric value corresponding to the particular direction 802. As examples, the

right, horizontal direction 802a corresponds to the chain code value 0, and the downward, vertical direction 802g corresponds to the chain code value 6. Any continuous contour can be described from eight-point chain code 800.

With reference to FIG. 24B, a contour 804 represented by pixels 806
5 designated X and A-G can be encoded in a conventional manner by the chain code sequence {00764432}. In particular, beginning from pixel X, pixels A and B are positioned in direction 0 relative to respective pixels X and A. Pixel C is positioned in direction 7 relative to pixel B. Remaining pixels D-G are similarly positioned in directions corresponding to the chain code values listed above. In a binary
10 representation, each conventional chain code value is represented by three digital bits.

FIG. 25A is a functional block diagram of a chain code process 810 of the present invention capable of providing contour compression ratios at least about twice those of conventional chain code processes. Chain code process 810 achieves
15 such improved compression ratios by limiting the number of chain codes and defining them relative to the alignment of adjacent pairs of pixels. Based upon experimentation, it has been discovered that the limited chain codes of chain code process 810 directly represent more than 99.8% of pixel alignments of object or mask contours. Special case chain code modifications accommodate the remaining
20 less than 0.2% of pixel alignment as described below in greater detail.

Function block 816 indicates that a contour is obtained for a mask, object, or sprite. The contour may be obtained, for example, by object segmentation process 140 described with reference to FIGS. 4 and 5.

Function block 818 indicates that an initial pixel in the contour is identified.
25 The initial pixel may be identified by common methods such as, for example, a pixel with minimal X-axis and Y-axis coordinate positions.

Function block 820 indicates that a predetermined chain code is assigned to represent the relationship between the initial pixel and the next adjacent pixel in the contour. Preferably, the predetermined chain code is defined to correspond to the
30 forward direction.

FIG. 25B is a diagrammatic representation of a three-point chain code 822 of

the present invention. Chain code 822 includes three chain codes 824a, 824b, and 824c that correspond to a forward direction 826a, a leftward direction 826b, and a rightward direction 826c, respectfully. Directions 826a-826c are defined relative to a preceding alignment direction 828 between a current pixel 830 and an adjacent pixel 832 representing the preceding pixel in the chain code.

Preceding alignment direction 828 may extend in any of the directions 802 shown in Fig. 24A, but is shown with a specific orientation (i.e., right, horizontal) for purposes of illustration. Direction 826a is defined, therefore, as the same as direction 828. Directions 826b and 826c differ from direction 828 by leftward and rightward displacements of one pixel.

It has been determined experimentally that slightly more than 50% of chain codes 824 correspond to forward direction 826a, and slightly less than 25% of chain codes 824 correspond to each of directions 826b and 826c.

Function block 836 represents an inquiry as to whether the next adjacent pixel in the contour conforms to one of directions 826. Whenever the next adjacent pixel in the contour conforms to one of directions 826, function block 836 proceeds to function block 838, and otherwise proceeds to function block 840.

Function block 838 indicates that the next adjacent pixel is assigned a chain code 824 corresponding to its direction 826 relative to the direction 828 along which the adjacent preceding pair of pixels are aligned.

Function block 840 indicates that a pixel sequence conforming to one of directions 826 is substituted for the actual nonconformal pixel sequence. Based upon experimentation, it has been determined that such substitutions typically will arise in fewer than 0.2% of pixel sequences in a contour and may be accommodated by one of six special-case modifications.

FIG. 25C is a diagrammatic representation of the six special-case modifications 842 for converting non-conformal pixel sequences to pixel sequences that conform to directions 826. Within each modification 842, a pixel sequence 844 is converted to a pixel sequence 846. In each of pixel sequences 844 of adjacent respective pixels X^1 , X^2 , A, B, the direction between pixels A and B does not conform to one of directions 826 due to the alignment of pixel A relative to the

alignment of pixels X^1 and X^2 .

In pixel sequence 844a, initial pixel alignments 850a and 852a represent a nonconformal right-angle direction change. Accordingly, in pixel sequence 846a, pixel A of pixel sequence 844a is omitted, resulting in a pixel direction 854a that
5 conforms to pixel direction 826a. Pixel sequence modifications 842b-842f similarly convert nonconformal pixel sequences 844b-844f to conformal sequences 846b-846f, respectively.

Pixel sequence modifications 842 omit pixels that cause pixel direction alignments that change by 90° or more relative to the alignments of adjacent
10 preceding pixels X_1 and X_2 . One effect is to increase the minimum radius of curvature of a contour representing a right angle to three pixels. Pixel modifications 842 cause, therefore, a minor loss of extremely fine contour detail. According to this invention, however, it has been determined that the loss of such details is acceptable under most viewing conditions.

15 Function block 860 represents an inquiry as to whether there is another pixel in the contour to be assigned a chain code. Whenever there is another pixel in the contour to be assigned a chain code, function block returns to function block 836, and otherwise proceeds to function block 862.

Function block 862 indicates that nonconformal pixel alignment directions
20 introduced or incurred by the process of function block 840 are removed. In a preferred embodiment, the nonconformal direction changes may be omitted simply by returning to function block 816 and repeating process 810 until no nonconformed pixel sequences remain, which typically is achieved in fewer than 8 iterations. In an alternative embodiment, such incurred nonconformal direction changes may be
25 corrected in "real-time" by checking for and correcting any incurred nonconformal direction changes each time a nonconformal direction change is modified.

Function block 864 indicates that a Huffman code is generated from the resulting simplified chain code. With chain codes 824a-824c corresponding to directions 826A-826C that occur for about 50%, 25% and 25% of pixels in a
30 contour, respective Huffman codes of 0, 11, and 10 are assigned. Such first order Huffman codes allow chain process 810 to represent contours at a bit rate of less

than 1.5 bits per pixel in the contour. Such a bitrate represents approximately a 50% compression ratio improvement over conventional chain code processes.

It will be appreciated that higher order Huffman coding can provide higher compression ratios. Higher order Huffman coding includes, for example, assigning
5 predetermined values to preselected sequences of first order Huffman codes.

SPRITE GENERATION

The present invention includes generating sprites for use in connection with encoding determinate motion video (movie). Bitmaps are accreted into bitmap series that comprise a plurality of sequential bitmaps of sequential images from an image
10 source. Accretion is used to overcome the problem of occluded pixels where objects or figures move relative to one another or where one figure occludes another similar to the way a foreground figure occludes the background. For example, when a foreground figure moves and reveals some new background, there is no way to build that new background from a previous bitmap unless the previous bitmap was first
15 enhanced by including in it the pixels that were going to be uncovered in the subsequent bitmap. This method takes an incomplete image of a figure and looks forward in time to find any pixels that belong to the image but are not to be immediately visible. Those pixels are used to create a composite bitmap for the figure. With the composite bitmap, any future view of the figure can be created by
20 distorting the composite bitmap.

The encoding process begins by an operator identifying the figures and the parts of the figures of a current bitmap from a current bitmap series. Feature or distortion points are selected by the operator on the features of the parts about which the parts of the figures move. A current grid of triangles is superimposed onto the
25 parts of the current bitmap. The triangles that constitute the current grid of triangles are formed by connecting adjacent distortion points. The distortion points are the vertices of the triangles. The current location of each triangle on the current bitmap is determined and stored to the storage device. A portion of data of the current bitmap that defines the first image within the current location of each triangle is
30 retained for further use.

A succeeding bitmap that defines a second image of the current bitmap series

is received from the image source, and the figures and the parts of the figure are identified by the operator. Next, the current grid of triangles from the current bitmap is superimposed onto the succeeding bitmap. The distortion points of current grid of triangles are realigned to coincide with the features of the corresponding
5 figures on the succeeding bitmap. The realigned distortion points form a succeeding grid of triangles on the succeeding bitmap of the second image. The succeeding location of each triangle on the succeeding bitmap is determined and stored to the storage device. A portion of data of the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained for further use.

10 The process of determining and storing the current and succeeding locations of each triangle is repeated for the plurality of sequential bitmaps of the current bitmap series. When that process is completed, an average image of each triangle in the current bitmap series is determined from the separately retained data. The average image of each triangle is stored to the storage device.

15 During playback, the average image of each triangle of the current bitmap series and the current location of each triangle of the current bitmap are retrieved from the storage device. A predicted bitmap is generated by calculating a transformation solution for transforming the average image of each triangle in the current bitmap series to the current location of each triangle of the current bitmap
20 and applying the transformation solution to the average image of each triangle. The predicted bitmap is passed to the monitor for display.

In connection with a playback determinate motion video (video game) in which the images are determined by a controlling program at playback, a sprite bitmap is stored in its entirety on a storage device. The sprite bitmap comprises a
25 plurality of data bits that define a sprite image. The sprite bitmap is displayed on a monitor, and the parts of the sprite are identified by an operator and distortion points are selected for the sprite's parts.

A grid of triangles is superimposed onto the parts of the sprite bitmap. The triangles that constitute the grid of triangles are formed by connecting adjacent
30 distortion points. The distortion points are the vertices of the triangles. The location of each triangle of the sprite bitmap is determined and stored to the storage

device.

During playback, a succeeding location of each triangle is received from a controlling program. The sprite bitmap and the succeeding location of each triangle on the sprite bitmap are recalled from the storage device and passed to the display processor. The succeeding location of each triangle is also passed to the display processor.

A transformation solution is calculated for each triangle on the sprite bitmap. A succeeding bitmap is then generated in the display processor by applying the transformation solution of each triangle derived from the sprite bitmap the defines the sprite image within the location of each triangle. The display processor passes the succeeding sprite bitmap to a monitor for display. This process is repeated for each succeeding location of each triangle requested by the controlling program.

As shown in Fig. 26, an encoding procedure for a movie motion video begins at step 900 by the CPU 22 receiving from an image source a current bitmap series. The current bitmap series comprises a plurality of sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a plurality of data bits which define a first image from the image source. The first image comprises at least one figure having at least one part.

Proceeding to step 902, the first image is displayed to the operator on the monitor 28. From the monitor 28, the figures of the first image on the current bitmap are identified by the operator. The parts of the figure on the current bitmap are then identified by the operator at step 904.

Next, at step 906, the operator selects feature or distortion points on the current bitmap. The distortion points are selected so that the distortion points coincide with features on the bitmap where relative movement of a part is likely to occur. It will be understood by those skilled in the art that the figures, the parts of the figures and the distortion points on a bitmap may be identified by the computer system 20 or by assistance from it. It is preferred, however, that the operator identify the figures, the parts of the figures and the distortion points on a bitmap.

Proceeding to step 908, a current grid of triangles is superimposed onto the parts of the current bitmap by the computer system 20. With reference to Fig. 27A,

the current grid comprises triangles formed by connecting adjacent distortion points. The distortion points form the vertices of the triangles. More specifically, the first image of the current bit map comprises a figure, which is a person 970. The person 970 has six parts corresponding to a head 972, a torso 974, a right arm 976, a left arm 978, right leg 980, and a left leg 982. Distortion points are selected on each part of the person 970 so that the distortion points coincide with features where relative movement of a part is likely to occur. A current grid is superimposed over each part with the triangles of each current grid formed by connecting adjacent distortion points. Thus, the distortion points form the vertices of the triangles.

At step 910, the computer system 20 determines a current location of each triangle on the current bitmap. The current location of each triangle on the current bitmap is defined by the location of the distortion points that form the vertices of the triangle. At step 912, the current location of each triangle is stored to the storage device. A portion of data derived from the current bitmap that defines the first image within the current location of each triangle is retained at step 914.

Next, at step 916, a succeeding bitmap of the current bitmap series is received by the CPU 22. The succeeding bitmap comprises a plurality of data bits which define a second image of the current bitmap series. The second image may or may not include figures that correspond to the figures in the first image. For the following steps, the second image is assumed to have figures that corresponds to the figures in the first image. At step 918, the current grid of triangles is superimposed onto the succeeding bitmap. The second image with the superimposed triangular grid is displayed to the operator on the monitor 28.

At step 920, the distortion points are realigned to coincide with corresponding features on the succeeding bitmap by the operator with assistance from the computer system 20. The computer system 20 realigns the distortion using block matching. Any mistakes are corrected by the operator. With reference to Fig. 27B, the realigned distortion points form a succeeding grid of triangles. The realigned distortion points are the vertices of the triangles. More specifically, the second image of the succeeding bitmap of person 200 includes head 972, torso 974, right arm 976, left arm 978, right leg 980, and left leg 982. In the second image,

however, the right arm 980 is raised. The current grids of the first image have been superimposed over each part and their distortion points realigned to coincide with corresponding features on the second image. The realigned distortion points define succeeding grids of triangles. The succeeding grids comprise triangles formed by
5 connecting the realigned distortion points. Thus, the realigned distortion point form the vertices of the triangles of the succeeding grids.

Proceeding to step 922, a succeeding location of each triangle of the succeeding bitmap is determined by the computer system 20. At step 924, the succeeding location of each triangle on the succeeding bitmap is stored the storage
10 device. A portion of data derived from the succeeding bitmap that defines the second image within the succeeding location of each triangle is retained at step 926. Step 926 leads to decisional step 928 where it is determined if a next succeeding bitmap exists.

If a next succeeding bitmap exists, the YES branch of decisional step 928
15 leads to step 930 where the succeeding bitmap becomes the current bitmap. Step 930 returns to step 916 where a succeeding bitmap of the current bitmap series is received by the CPU 22. If a next succeeding bitmap does not exist, the NO branch of decisional step 928 leads to step 932 where an average image for each triangle of the current bitmap series is determined. The average image is the median value of
20 the pixels of a triangle. Use of the average image makes the process less susceptible to degeneration. Proceeding to step 934, the average image of each triangle of the current bitmap series is stored to the storage device.

Next, at step 936, the current location of each triangle on the current bitmap is retrieved from the storage device. An affine transformation solution for
25 transforming the average image of each triangle to the current location of the triangle on the current bitmap is then calculated by the computer system 20 at step 938. At step 940, a predicted bitmap is generated by applying the transformation solution of the average image of each triangle to the current location of each triangle on the current bitmap. The predicted bitmap is compared with the current bitmap at
30 step 942.

At step 944 a correction bitmap is generated. The corrected bitmap

comprises the data bits of the current bitmap that were not accurately predicted by the predicted bitmap. The corrected bitmap is stored to the storage device at step 948. Step 948 leads to decisional step 950 where it is determined if a succeeding bitmap exists.

5 If a succeeding bitmap exists, the YES branch of decisional step 950 leads to step 952 where the succeeding bitmap becomes the current bitmap. Step 952 returns to step 936 where the current location of each triangle on the current bitmap is retrieved from the storage device. If a next succeeding bitmap does not exist, the NO branch of decisional step 950 leads to decisional step 954 where it is determined
10 if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, encoding is finished and the NO branch of decisional step 954 leads to step 956. If a succeeding bitmap series exists, the YES branch of decisional step 954 leads to step 958 where the CPU 22 receives the succeeding bitmap series as the current bitmap series. Step 956 returns to step 902 where the figures of the first image of
15 the current bitmap series is identified by the operator.

The process of Fig. 26 describes generation of a sprite or master object 90 for use by encoder process 64 of Fig. 3. The process of utilizing master object 90 to form predicted objects 102 is described with reference to Fig. 28.

20 As shown in Fig. 28, the procedure begins at step 1000 with a current bitmap series being retrieved. The current bitmap series comprises a plurality of sequential bitmaps of sequential images. The current bitmap series has a current bitmap that comprises a plurality of data bits which define a first image from the image source. The first image comprises at least one figure having at least one part.

25 At step 1002, the average image of each triangle of the current bitmap series is retrieved from the storage device. The average image of each triangle is then passed to a display processor (not shown) at step 704. It will be appreciated that computer system 20 (Fig. 1) can optionally include a display processor or other dedicated components for executing for processes of this invention. Proceeding to step 1006, the current location of each triangle on the current bitmap is retrieved
30 from the storage device. The current location of each triangle is passed to the display processor at step 1008.

Next, an affine transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap is calculated by the display processor at step 1010. Proceeding to step 1012, a predicted bitmap is generated by the display processor by applying the
5 transformation solution for transforming the average image of each triangle to the current location of each triangle on the current bitmap.

At step 1014, a correction bitmap for the current bitmap is retrieved from the storage device. The correction bitmap is passed to the display processor at step 716. A display bitmap is then generated in the display processor by overlaying the
10 predicted bitmap with the correction bitmap. The display processor retains a copy of the average image of each triangle and passes the display bitmap to the frame buffer for display on the monitor.

Next, at decisional step 1020, it is determined if a succeeding bitmap of the current bitmap series exists. If a succeeding bitmap of the current bitmap series
15 exists, the YES branch of decisional step 1020 leads to step 1022. At step 1022, the succeeding bitmap becomes the current bitmap. Step 1022 returns to step 1006 where the location of each triangle on the current bitmap is retrieved from the storage device.

Returning to decisional step 1020, if a succeeding bitmap of the current
20 bitmap series does not exist, the NO branch of decisional step 1020 leads to decisional step 1024. At decisional step 1024, it is determined if a succeeding bitmap series exists. If a succeeding bitmap series does not exist, then the process is finished and the NO branch of decisional step 1024 leads to step 1026. If a succeeding bitmap series exists, the YES branch of decisional step 1024 leads to step
25 1028. At step 1028, the succeeding bitmap series becomes the current bitmap series. Step 1028 returns to step 1000.

Having illustrated and described the principles of the present invention in a preferred embodiment, it should be apparent to those skilled in the art that the embodiment can be modified in arrangement and detail without departing from such
30 principles. Accordingly, we claim as our invention all such embodiments as come within the scope and spirit of the following claims and equivalents thereto.

WE CLAIM:

1. A method of encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an arbitrary image feature with an arbitrary configuration, the arbitrary image feature
5 having different attributes in the first and second video image frames, the method comprising:

determining a dense motion transformation between the arbitrary image feature in the first and second video image frames to determine an estimated arbitrary image feature in the second video image frame; and

10 identifying a difference between the estimated arbitrary image feature in the second video image frame and the arbitrary image feature in the second video image frame to determine a transform error for the arbitrary image feature.

2. The method of claim 1 in which the arbitrary image feature includes as attributes a position, an orientation, and a configuration in the each of the first and
15 second video image frames and the difference between the attributes of the arbitrary image feature in the first and second video image frames includes a difference in at least one of the position, orientation, or configuration.

3. The method of claim 1 further comprising applying the transform error to the estimated arbitrary image feature in the second video image frame to form a
20 corrected image feature in the second video image frame.

4. The method of claim 3 in which the video image frame sequence further includes a third video image frame that includes the arbitrary image feature and the method further comprises determining a dense motion transformation between the corrected image feature in the second video image frame and the arbitrary image
25 feature in the third video image frame to determine an estimated arbitrary image feature in the third video image frame.

5. The method of claim 1 in which image features in the video image frame sequence are formed from plural pixels and in which determining the dense motion transformation between the arbitrary image feature in the first and second video
30 image frames includes identifying corresponding pixels of the arbitrary image feature in the first and second video image frames.

6. The method of claim 5 further comprising identifying all corresponding pixels of the arbitrary image feature in the first and second video image frames.

7. The method of claim 1 in which determining the dense motion transformation between the arbitrary image feature in the first and second video
5 image frames includes determining affine motion transformations between the arbitrary image feature in the first and second video image frames.

8. The method of claim 1 in which the first video image frame precedes the second video image frame.

9. The method of claim 1 further comprising encoding the transform error in
10 a first compressed format, decoding the transform error from the first compressed format to form a quantized transform error, and correcting the estimated arbitrary image feature in the second video image according to the quantized transform error.

10. The method of 9 in which the transform error encoded in the first compressed format is a lossy representation of the transform error.

15 11. The method of claim 9 further comprising encoding in a second compressed format the transform error encoded in the first compressed format.

12. The method of claim 11 in which the first and second compressed formats are, respectively, lossy and lossless compression formats.

13. The method of claim 1 in which the first and second video image frames
20 further include plural other arbitrary image features with arbitrary configurations, at least one of the other arbitrary image features having different attributes in the first and second video image frames, the method further comprising:

determining dense motion transformations between the other arbitrary image features in the first and second video image frames to determine estimated other
25 arbitrary image features in the second video image frame; and

identifying differences between the estimated other arbitrary image features in the second video image frame and the other arbitrary image features in the second video image frame to determine transform errors for the other arbitrary image features.

30 14. A data structure stored on a computer-readable medium and representing in a compressed format information within a video image frame sequence having

plural video image frames that include plural image features that have different attributes in the selected ones of the video image frames, the data structure comprising:

5 selected image feature data corresponding to selected characteristics of the plural image features;

 affine transform coefficient data corresponding to coefficients of affine transformations that represent changes of the plural image features between the selected ones of the video image frames; and

10 transform error data corresponding to errors in the changes of the plural image features represented by the affine transformations.

 15. The data structure of claim 14 in which at least one the affine transform coefficient data and the transform error data is encoded in a compressed format.

 16. The data structure of claim 14 in which the selected characteristics of the plural image features include binary mask representations of the plural image features.

 17. The data structure of claim 14 in which the selected characteristics of the plural image features include plural selected pixels from each of the plural image features.

20 18. The data structure of claim 14 in which the selected characteristics of the plural image features include sprites that each represent the different attributes of one of the image features in the plural video image frames.

 19. A method of decoding compressed information relating to an arbitrary image feature with an arbitrary configuration within first and second video image frames of a video image frame sequence, the arbitrary image feature having different attributes in the first and second video image frames, the method comprising:

25 applying a dense motion transformation to a representation of the arbitrary image feature in the first video image frame to form an estimated arbitrary image feature in the second video image frame; and

30 applying a transform difference to the estimated arbitrary image feature in the second video image frame to obtain the arbitrary image feature in the second video image frame.

20. The method of claim 19 in which the video image frame sequence further includes a third video image frame that includes the arbitrary image feature and the method further comprises:

5 applying a dense motion transformation to the arbitrary image feature in the second video image frame to form an estimated arbitrary image feature in the third video image frame; and

 applying a transform difference to the estimated arbitrary image feature in the third video image frame to obtain the arbitrary image feature in the third video image frame.

10 21. The method of claim 19 in which image features in the video image frame sequence are formed from plural pixels and in which the dense motion transformation represents correlations between corresponding pixels of the arbitrary image feature in the first and second video image frames.

15 22. The method of claim 19 in which the dense motion transformation includes an affine motion transformation between the arbitrary image feature in the first and second video image frames.

23. The method of claim 19 in which the first video image frame precedes the second video image frame.

20 24. The method of claim 19 in which the first and second video image frames further include plural other arbitrary image features with arbitrary configurations, at least one of the other arbitrary image features having different attributes in the first and second video image frames, the method further comprising:

25 applying dense motion transformations to representations of the other arbitrary image features in the first video image frame to form estimated other arbitrary image features in the second video image frame; and

 applying transform differences to the estimated other arbitrary image features in the second video image frame to obtain the other arbitrary image features in the second video image frame.

30 25. A computer-readable medium storing computer-executable programming for encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an arbitrary image

-61-

feature with an arbitrary configuration, the arbitrary image feature having different attributes in the first and second video image frames, the medium comprising:

programming for determining a dense motion transformation between the arbitrary image feature in the first and second video image frames to determine an estimated arbitrary image feature in the second video image frame; and

programming for identifying a difference between the estimated arbitrary image feature in the second video image frame and the arbitrary image feature in the second video image frame to determine a transform error for the arbitrary image feature.

26. A computer-readable medium storing computer-executable programming for decoding compressed information relating to an arbitrary image feature with an arbitrary configuration within first and second video image frames of a video image frame sequence, the arbitrary image feature having different attributes in the first and second video image frames, the medium comprising:

programming for applying a dense motion transformation to a representation of the arbitrary image feature in the first video image frame to form an estimated arbitrary image feature in the second video image frame; and

programming for applying a transform difference to the estimated arbitrary image feature in the second video image frame to obtain the arbitrary image feature in the second video image frame.

27. A method of encoding in a compressed format information within a video image frame sequence having first and second video image frames that include an image component, the image component having different attributes in the first and second video image frames, the method comprising:

determining a motion transformation between the image component in the first and second video image frames to determine an estimated image component in the second video image frame;

identifying a difference between the estimated image component in the second video image frame and the image component in the second video image frame to determine a transform error for the image component;

applying the transform error to the estimated image component in the second

video image frame to form a corrected image component in the second video image frame; and

encoding the corrected image component in a first compressed format.

28. A block matching motion estimation method for estimating motion of
5 corresponding pixels between first and second video image frames, comprising:

defining a reference pixel block of multiple pixels relative to a first reference pixel in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the reference pixel block being a non-quadrilateral polygonal array of pixels;

10 determining and storing for the pixels in the sample pixel block correlations to the pixels in the reference pixel block; and

identifying from the correlations a first sample pixel corresponding to the first reference pixel.

29. The method of claim 1 in which the first reference pixel and the first
15 sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter.

30. The method of claim 29 further comprising:

20 defining relative to the first reference pixel a preliminary quadrilateral reference pixel block of plural pixels;

identifying the pixels of the preliminary quadrilateral pixel block as to whether they are in the interior of the arbitrary first image feature, at least one of the pixels in the preliminary quadrilateral pixel block not being in the interior of the
25 arbitrary first image feature; and

establishing as the reference pixel block the pixels of the preliminary quadrilateral pixel block in the interior of the arbitrary first image feature.

31. The method of claim 29 in which the arbitrary first image feature includes plural image feature pixels, the method further comprising:

30 defining a reference pixel block of multiple pixels relative to each image feature pixel in the first video image frame and defining a corresponding sample

-63-

pixel block of multiple sample pixels in the second video image frame, at least one of the reference pixel blocks being a non-quadrilateral polygonal array of pixels;

determining and storing for the pixels in the sample pixel block correlations to the image feature pixel relative to which the corresponding reference pixel block is defined; and

identifying from the correlations selected sample pixels in correlation with the image feature pixels relative to which the corresponding reference pixel blocks are defined.

32. The method of claim 28 in which determining correlations includes determining summed absolute errors between pixels of the sample pixel block and the reference pixel block.

33. The method of claim 32 in which the first sample pixel corresponding to the first reference pixel is the sample pixel for which the summed absolute error between the sample pixel block and the reference pixel block is minimal.

34. The method of claim 32 in which each of the reference and sample pixels is represented by three color component values and the summed absolute errors E are determined as:

$$E = \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} (|r_{ij} - r'_{ij}| + |g_{ij} - g'_{ij}| + |b_{ij} - b'_{ij}|),$$

in which r_{ij} , g_{ij} , and b_{ij} correspond to the color component values representing the reference pixels and r'_{ij} , g'_{ij} , and b'_{ij} correspond to the color component values representing the sample pixels.

35. The method of claim 34 in which the three color component values correspond to red, green, and blue color components.

36. The method of claim 28 in which the first video image frame precedes the second video image frame.

37. A block matching motion estimation method for estimating motion of pixels between first and second video image frames that include an arbitrary first image feature of plural image feature pixels, comprising:

identifying the arbitrary first image feature in the first video image frame; defining a reference pixel block of multiple pixels relative to each image

feature pixel in the first video image frame and a corresponding sample pixel block of multiple sample pixels in the second video image frame;

identifying for each reference pixel block in the first video image frame the pixels of the arbitrary first image feature; and

5 identifying from the sample pixels in the sample pixel block first sample pixels corresponding to the image feature pixels.

38. The method of claim 37 in which the arbitrary first image feature has an interior that is bounded by an image feature perimeter, the method further comprising:

10 defining relative to each image feature pixel a preliminary quadrilateral reference pixel block of plural pixels;

identifying the pixels of the preliminary quadrilateral reference pixel block as to whether they are in the interior of the arbitrary first image feature; and

15 establishing as the reference pixel block the pixels of the preliminary quadrilateral reference pixel block in the interior of the arbitrary first image feature.

39. The method of claim 38 in which at least one of the pixels in the preliminary quadrilateral pixel block is not in the interior of the arbitrary first image feature and the reference pixel block is defined to include a pixel block perimeter that conforms to the image feature perimeter.

20 40. The method of claim 37 in which the reference pixel block is a non-quadrilateral polygonal array of pixels.

41. A computer-readable medium storing computer-executable programming for estimating motion of corresponding pixels between first and second video image frames, the medium comprising:

25 programming for defining a reference pixel block of multiple pixels relative to a first reference pixel in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the reference pixel block being a non-quadrilateral polygonal array of pixels;

30 programming for determining and storing for the pixels in the sample pixel block correlations to the reference pixel block and the first reference pixel; and programming for identifying from the correlations a first sample pixel

corresponding to the first reference pixel.

42. The medium of claim 41 in which the first reference pixel and the first sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter, the medium further comprising:

programming for defining relative to the first reference pixel a preliminary quadrilateral reference pixel block of plural pixels;

10 programming for identifying the pixels of the preliminary quadrilateral pixel block as to whether they are in the interior of the arbitrary first image feature, at least one of the pixels in the preliminary quadrilateral pixel block not being in the interior of the arbitrary first image feature; and

programming for establishing as the reference pixel block the pixels of the preliminary quadrilateral pixel block in the interior of the arbitrary first image feature.

43. The medium of claim 41 in which the first reference pixel and the first sample pixel are included in arbitrary first and second image features in the first and second video image frames, respectively, the arbitrary first image feature having plural image feature pixels in an interior that is bounded by an image feature perimeter, the reference pixel block including a pixel block perimeter that conforms to the image feature perimeter, the medium further comprising:

programming for defining a reference pixel block of multiple pixels relative to each image feature pixel in the first video image frame and defining a corresponding sample pixel block of multiple sample pixels in the second video image frame, at least one of the reference pixel blocks being a non-quadrilateral polygonal array of pixels;

programming for determining and storing for the pixels in the sample pixel block a correlation to the image feature pixel relative to which the corresponding reference pixel block is defined; and

programming for identifying from the correlations a selected sample pixel in

correlation with the image feature pixel relative to which the corresponding reference pixel block is defined.

44. A block matching motion estimation method for estimating motion of corresponding pixels between first and second video image frames, comprising:

5 defining first and second reference pixel blocks of multiple pixels relative to respective first and second reference pixels in the first video image frame and a sample pixel block of multiple sample pixels in the second video image frame, the first reference, second reference, and sample pixel blocks including plural respective first reference, second reference, and sample subsets of multiple pixels;

10 determining and storing first correlations between the sample subsets and the first reference subsets;

 determining and storing second correlations between the sample subsets and the second reference subsets, wherein at least one of the second correlations matches one of the first correlations and determining the at least one of the second

15 correlations includes retrieving the matching one of the first correlations; and

 identifying from the first and second correlations first and second sample pixels corresponding to the first and second reference pixels, respectively.

45. The method of claim 44 in which the pixels of the first and second video image frames are arranged as regular arrays of pixels and the first and second reference subsets are commonly aligned segments of the regular arrays.

46. The method of claim 44 in which the pixels of the first and second video image frames are arranged as regular arrays of rows and columns of pixels and the first and second reference subsets are portions of columns of the regular arrays.

25 47. The method of claim 44 in which the first and second correlations include multiple correlation components and a selected one of the second correlations matches a selected first correlation and includes fewer than all the correlation components of the selected first correlation, the method further comprising:

30 retrieving the selected first correlation; and
 conforming the selected first correlation to the selected second correlation.

48. The method of claim 47 in which the selected second correlation includes a new correlation component not included in the selected first correlation and conforming the selected first correlation includes incorporating into it the new correlation component.

5 49. The method of claim 47 in which the selected second correlation includes a new correlation component not included in the selected first correlation and the selected first correlation includes a prior correlation component not included in the selected second correlation, wherein conforming the selected first correlation includes omitting the prior correlation component from and incorporating the new
10 correlation component in the selected first correlation.

50. The method of claim 44 in which at least one of the first and second reference pixel blocks is a non-quadrilateral polygonal array of pixels.

51. The method of claim 44 in which the first reference pixel and the first sample pixel are included an arbitrary first image feature in the first and second
15 video image frames, respectively, the arbitrary first image feature having an interior that is bounded by an image feature perimeter and the first reference pixel block including a pixel block perimeter that conforms to the image feature perimeter.

52. The method of claim 44 in which determining correlations includes determining mean absolute errors between the sample and reference subsets of
20 multiple pixels.

53. In a block matching motion estimation method for estimating motion of corresponding pixels between first and second video image frames, a method of determining correlations between plural reference pixel blocks of multiple pixels and a sample pixel block of multiple sample pixels in the second video image frame,
25 each reference pixel block being relative to a reference pixel in the first video image frame, comprising:

defining within the reference and sample pixel blocks respective reference and sample subsets of multiple pixels;

determining and storing correlations between the sample and reference
30 subsets; and

identifying from the correlations first sample pixels corresponding to the

reference pixels.

54. The method of claim 53 in which first and second correlations are determined between the sample subsets and the reference subsets of preceding reference pixel blocks and subsequent reference pixel blocks, respectively.

5 55. The method of claim 54 in which at least one of the second correlations matches one of the first correlations and determining the at least one of the second correlations includes retrieving the matching one of the first correlations.

56. The method of claim 54 in which the first and second correlations include multiple correlation components and a selected second correlation includes
10 fewer than all the correlation components of a selected first correlation that matches the selected second correlation, the method further comprising:

retrieving the selected first correlation; and

conforming the selected first correlation to the selected second correlation.

57. The method of claim 56 in which the selected second correlation
15 includes a new correlation component not included in the selected first correlation and conforming the selected first correlation includes incorporating into it the new correlation component.

58. The method of claim 56 in which the selected second correlation includes a new correlation component not included in the selected first correlation
20 and the selected first correlation includes a prior correlation component not included in the selected second correlation, wherein conforming the selected first correlation includes omitting the prior correlation component from and incorporating the new correlation component in the selected first correlation.

59. A computer-readable medium storing computer-executable programming
25 for estimating motion of corresponding pixels between first and second video image frames, the medium comprising:

programming for defining within the reference and sample pixel blocks respective reference and sample subsets of multiple pixels;

30 programming for determining and storing correlations between the sample and reference subsets; and

programming for identifying from the correlations first sample pixels

corresponding to the reference pixels.

60. The medium of claim 59 further comprising programming for determining first and second correlations between the sample subsets and the reference subsets of preceding reference pixel blocks and subsequent reference pixel blocks, respectively.

61. The medium of claim 60 further comprising programming for determining that a selected second correlation matches a selected first correlation and programming for determining the selected second correlation with retrieval of the matching selected first correlation.

62. The medium of claim 60 in which the first and second correlations have multiple correlation components and a selected second correlation has fewer than all the correlation components of the matching one of the first correlations, the medium further comprising:

programming for retrieving the matching one of the first correlations; and
programming for conforming the matching one of the first correlations to the at least one of the second correlations.

63. A data structure stored on a computer-readable medium and representing an estimation of motion of corresponding pixels between first and second video image frames, the first video image frame including first and second reference pixels relative to which respective first and second reference pixel blocks are defined, and the second video image frame including a sample pixel block of multiple sample pixels, comprising:

reference and sample pixel block subset data representing multiple pixel subsets of the reference and sample pixel blocks; and
subset correlation data representing correlations between the multiple pixel subsets of the reference and sample pixel blocks.

64. A precompression video transformation method of transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including the plural

feature pixels and plural non-feature pixels, the method comprising:

defining the image component of predetermined configuration about the image feature and identifying the non-feature pixels;

5 identifying plural non-feature pixel sets each of plural adjacent non-feature pixels and including at least one non-feature pixel adjacent a feature pixel of the feature boundary; and

assigning to the non-feature pixels in each non-feature pixel set a pixel value that includes the pixel value of the feature pixel of the feature boundary adjacent the at least one of the non-feature pixels in the non-feature pixel set.

10 65. The method of claim 64 in which the image component includes non-feature pixels other than the ones in the plural non-feature pixel sets, the method further comprising:

identifying as unassigned pixels the non-feature pixels in the image component not included in the non-feature pixel sets;

15 identifying pairs of non-feature pixel sets adjacent the unassigned pixels; and assigning to unassigned pixels pixel values that include the pixel values of the adjacent pairs of non-feature pixels sets.

20 66. The method of claim 64 in which the feature and non-feature pixels of the image component are arranged as an array of rows and columns of pixels and the non-feature pixel sets include a row and a column of non-feature pixels.

67. The method of claim 64 in which selected pairs of non-feature pixel sets include common non-feature pixels and the common non-feature pixels include the pixel values assigned to the non-feature pixels of both non-feature pixel sets.

25 68. The method of claim 67 in which the common non-feature pixels are assigned pixel values that include averages of the pixel values assigned to the non-feature pixels of both non-feature pixel sets.

69. The method of claim 64 in which non-feature pixels in at least one of the non-feature pixel sets are assigned the pixel value of the adjacent feature pixel of the feature boundary.

30 70. The method of claim 64 in which non-feature pixels in one non-feature pixel set are assigned the pixel value of the feature pixel of the feature boundary

adjacent the at least one of the non-feature pixels in the non-feature pixel set.

71. A precompression video transformation method of transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed
5 format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including the plural feature pixels and plural non-feature pixels, the method comprising:

assigning to each of the non-feature pixels of the image component a pixel value that includes the pixel value of a feature pixel of the feature boundary.

10 72. The method of claim 71 in which selected non-feature pixels in the image component are assigned pixel values of plural feature pixels of the feature boundary.

73. The method of claim 72 in which the selected non-feature pixels are assigned pixel values that include an average of the pixel values of plural feature
15 pixels of the feature boundary.

74. The method of claim 71 in which non-feature pixels in the image component are assigned the pixel values of feature pixels of the feature boundary.

75. The method of claim 71 in which the feature and non-feature pixels of the image component are arranged as an array of rows and columns of pixels, the
20 method further comprising:

identifying selected non-feature pixels of the image component that are in rows or columns with feature pixels of the feature boundary; and

assigning to the selected non-feature pixels pixel values that include the pixel values of the feature pixels of the feature boundary.

25 76. A computer-readable medium storing computer-executable programming for transforming an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration for encoding in a compressed format, the arbitrary image feature and feature boundary including plural feature pixels with associated pixel values and the image component including
30 the plural feature pixels and plural non-feature pixels, the medium comprising:

programming for assigning to each of the non-feature pixels of the image

component a pixel value that includes the pixel value of a feature pixel of the feature boundary.

77. The medium of claim 15 further comprising programming for assigning to selected non-feature pixels in the image component pixel values of plural feature
5 pixels of the feature boundary.

78. A data structure stored on a computer-readable medium and representing a precompression extrapolation of an arbitrary image feature with a feature boundary of arbitrary configuration to an image component of predetermined configuration, the arbitrary image feature and feature boundary including plural feature pixels with
10 associated pixel values and the image component including the plural feature pixels and plural non-feature pixels, the data structure comprising:

image feature data representing the arbitrary image feature and the feature boundary of arbitrary configuration and including pixel values of pixels in the feature boundary;


15 image component data representing the image component of predetermined configuration about the image feature; and



non-feature pixel data representing the non-feature pixels with pixel values that include value that includes the pixel value of the pixel values of the pixels in the feature boundary.

20 79. The data structure of claim 78 in which the non-feature pixel data includes pixel values that represent non-feature pixels with pixel values that are the same as pixel values of pixels in the feature boundary.


80. The data structure of claim 78 in which the non-feature pixel data includes pixel values that represent non-feature pixels with pixel values that are
25 averages of pixel values of pixels in the feature boundary.

Fig. 1

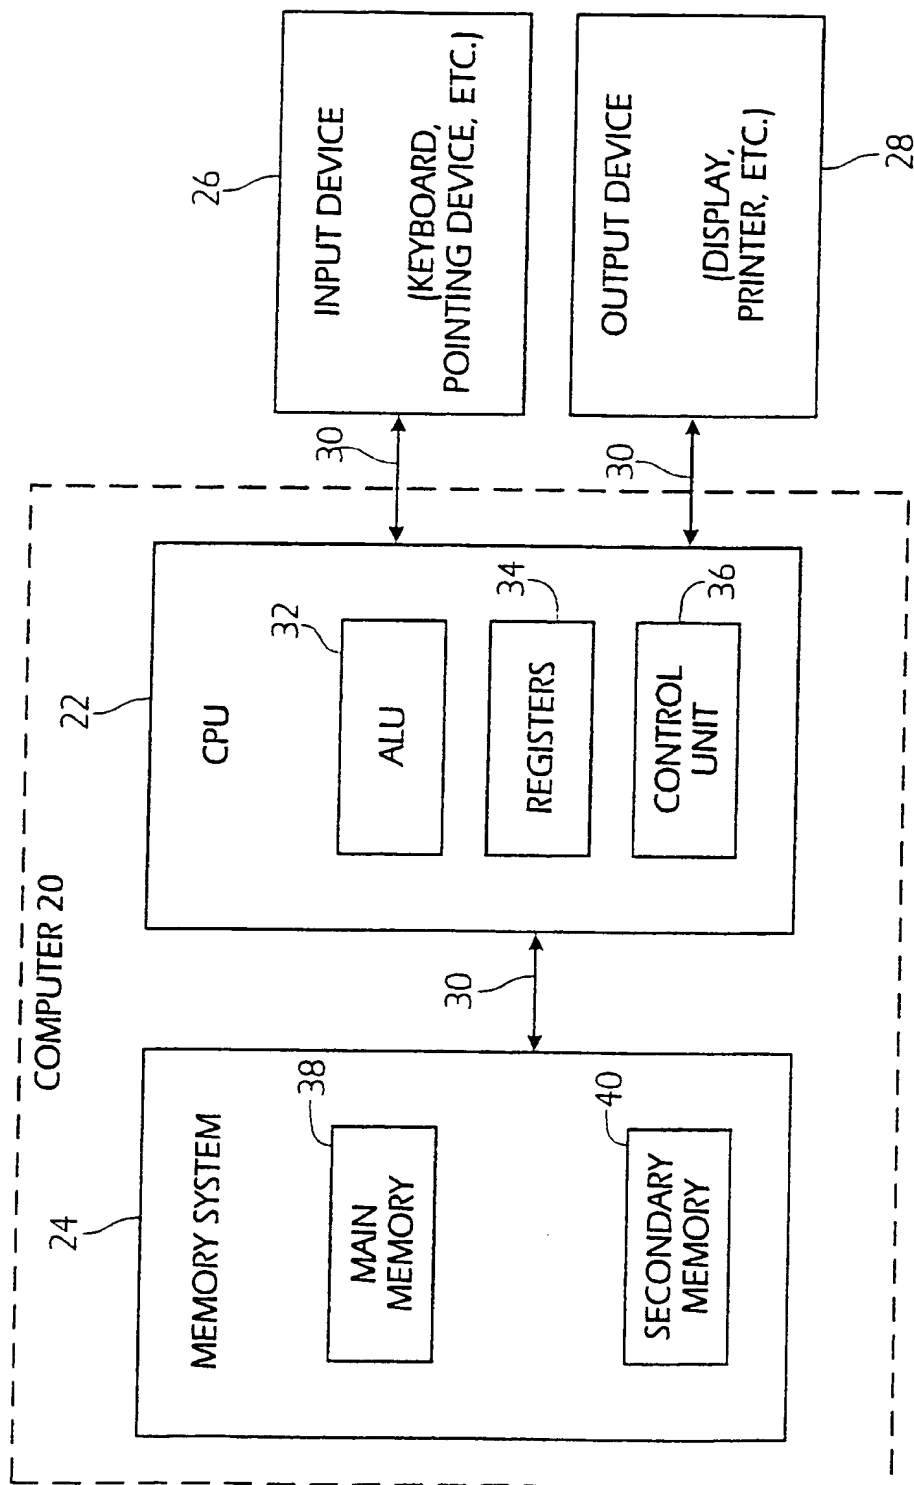

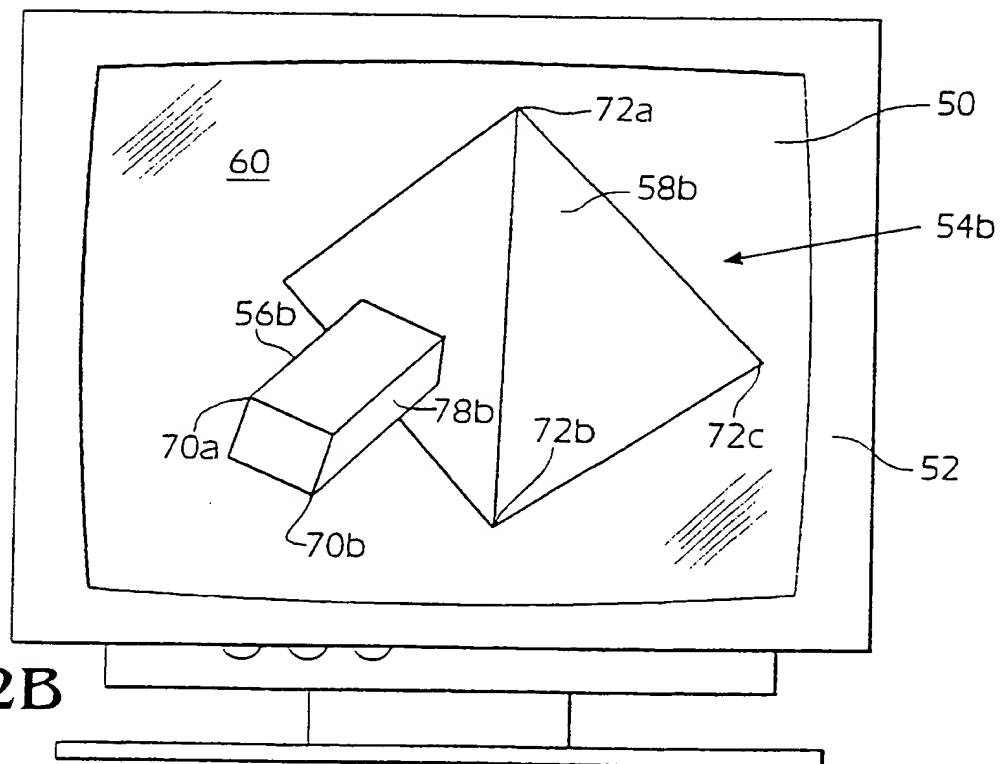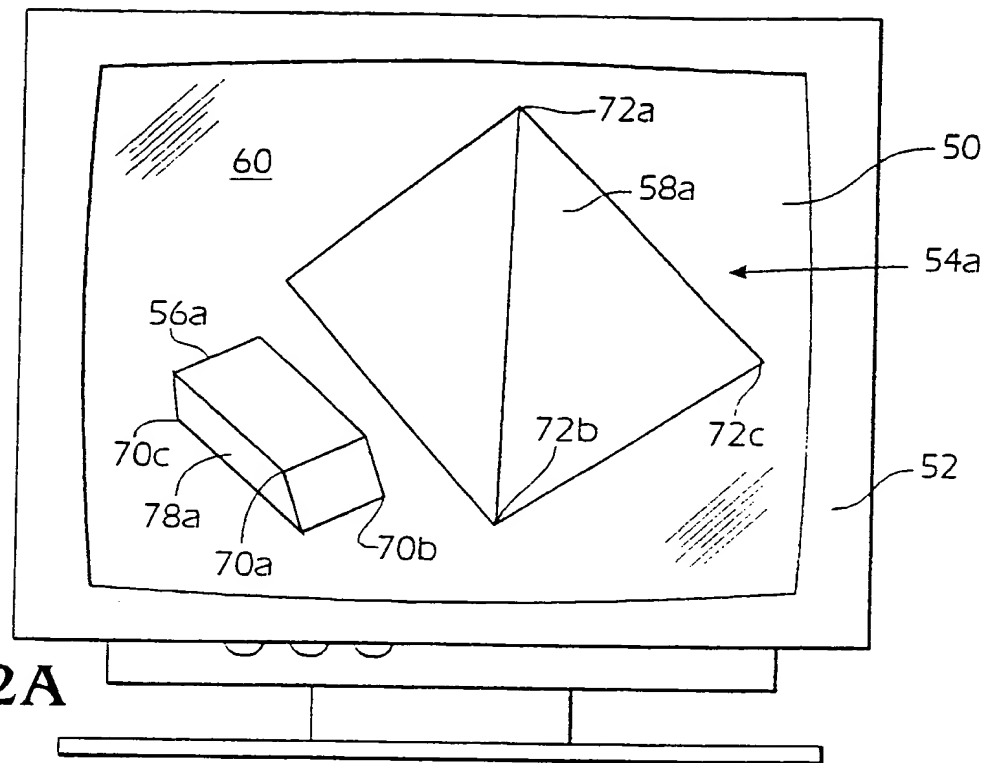

3/30

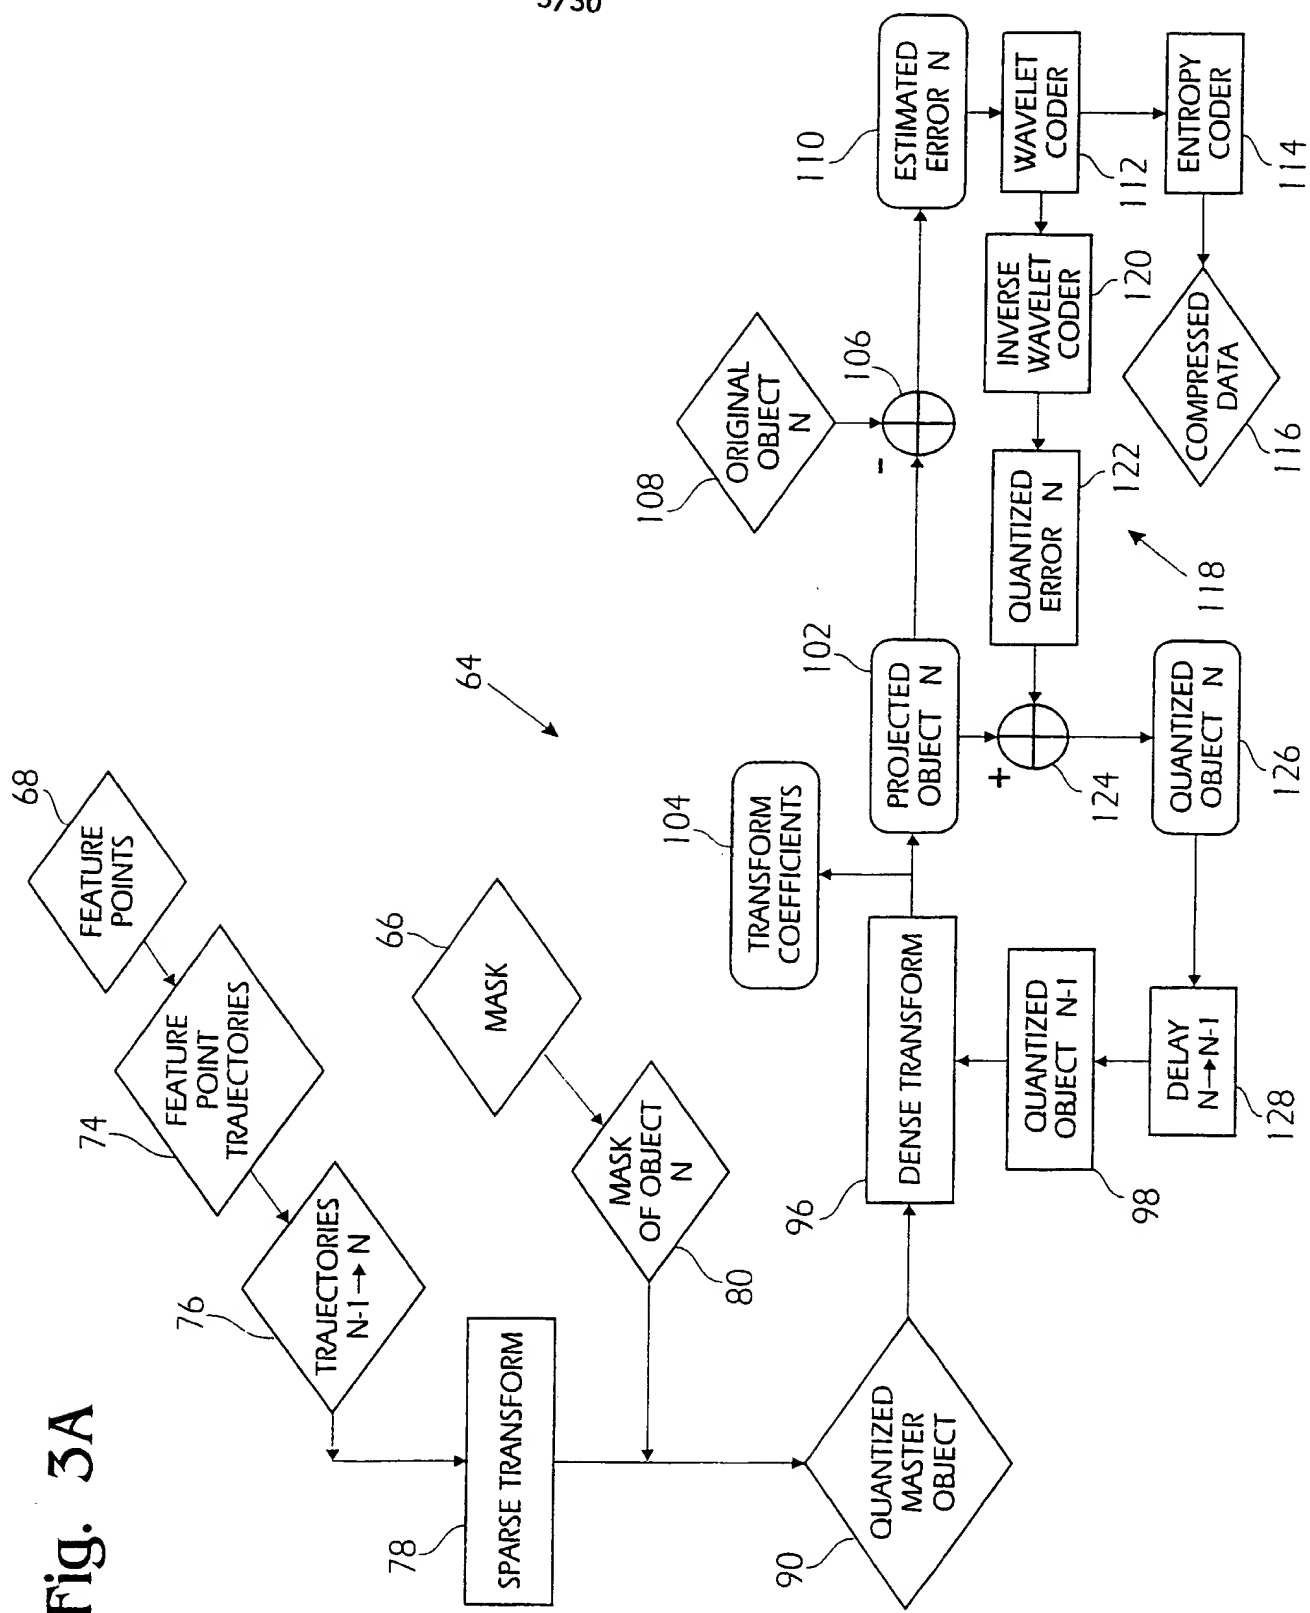

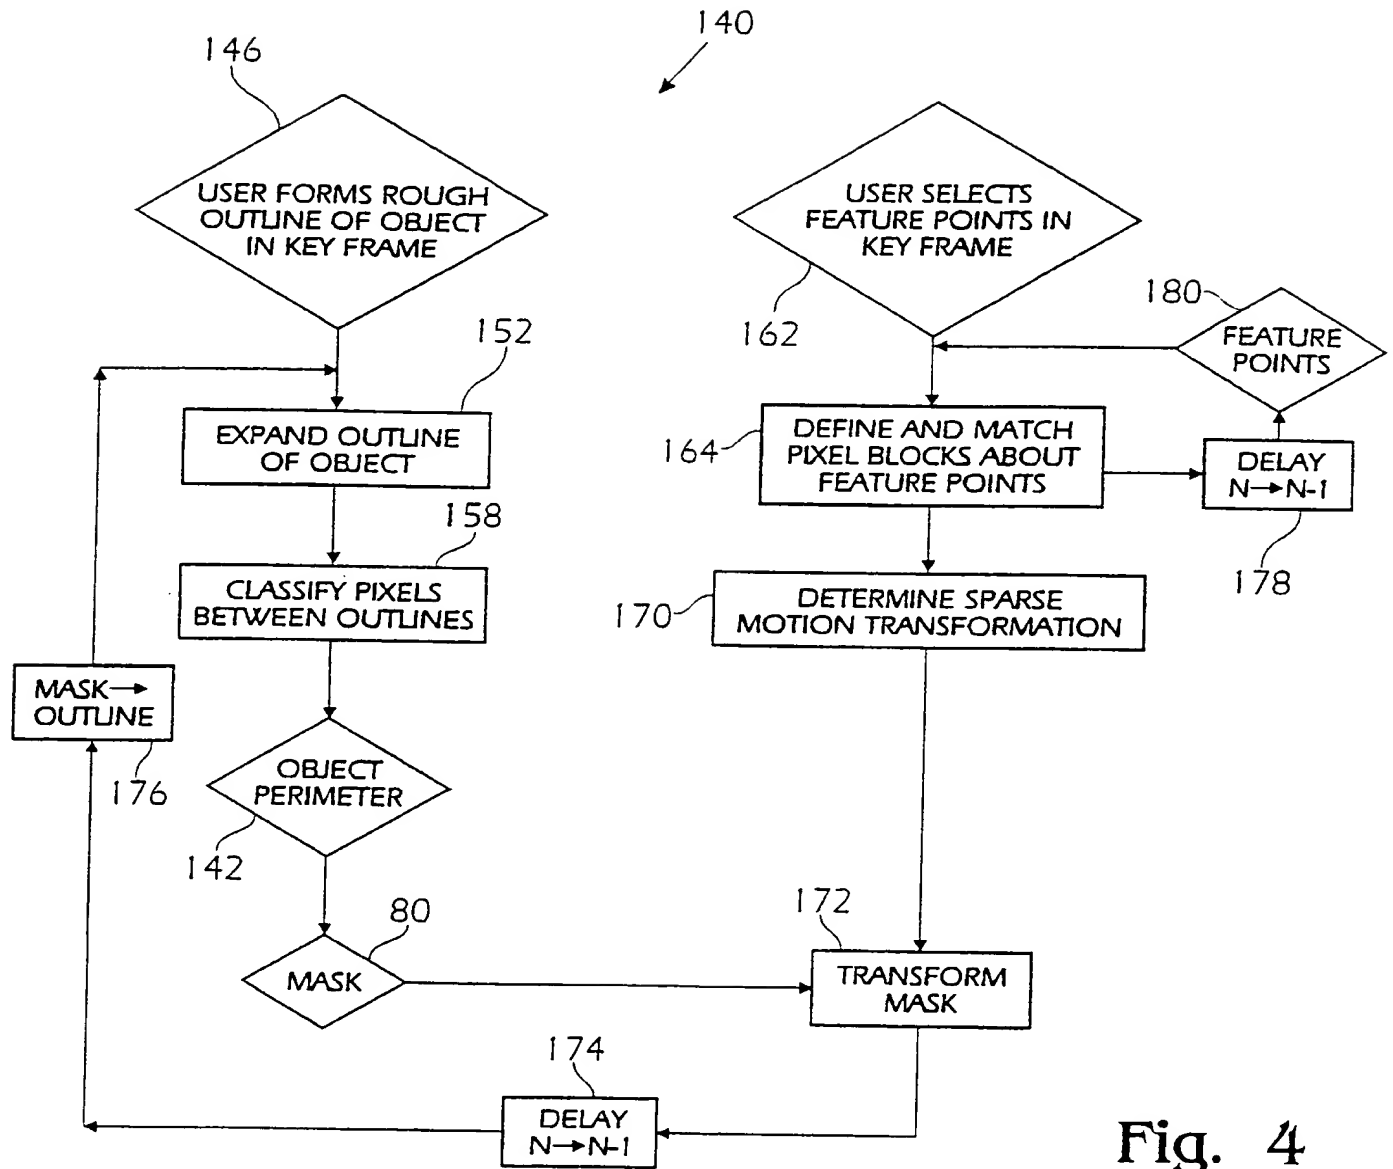


Fig. 4

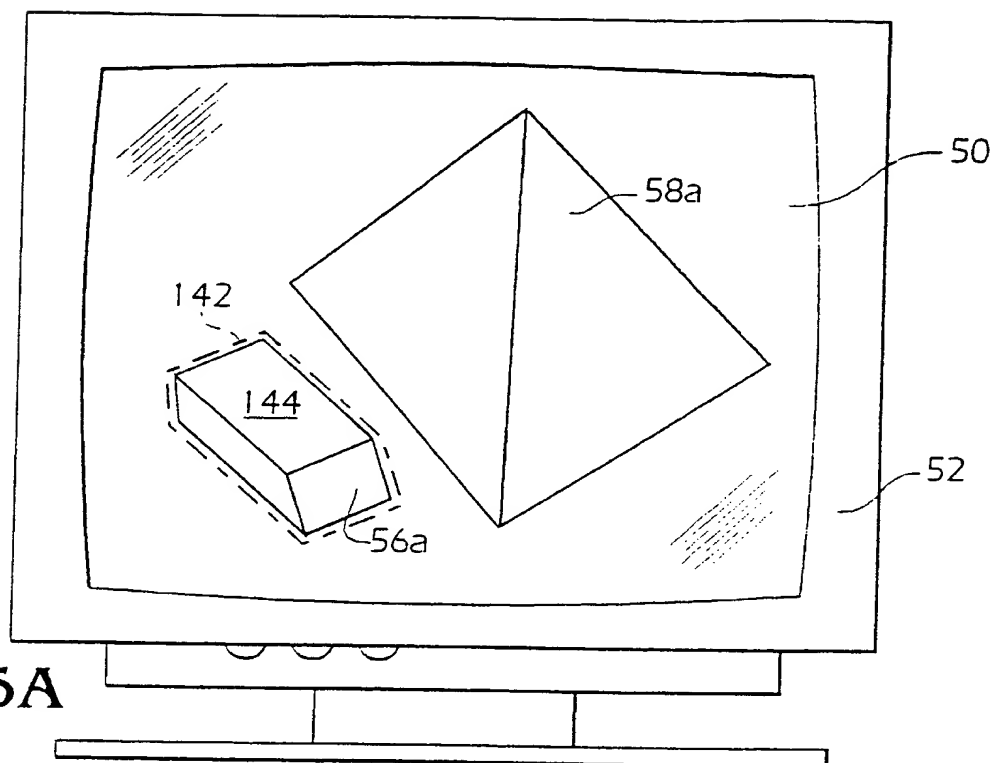


Fig. 5A

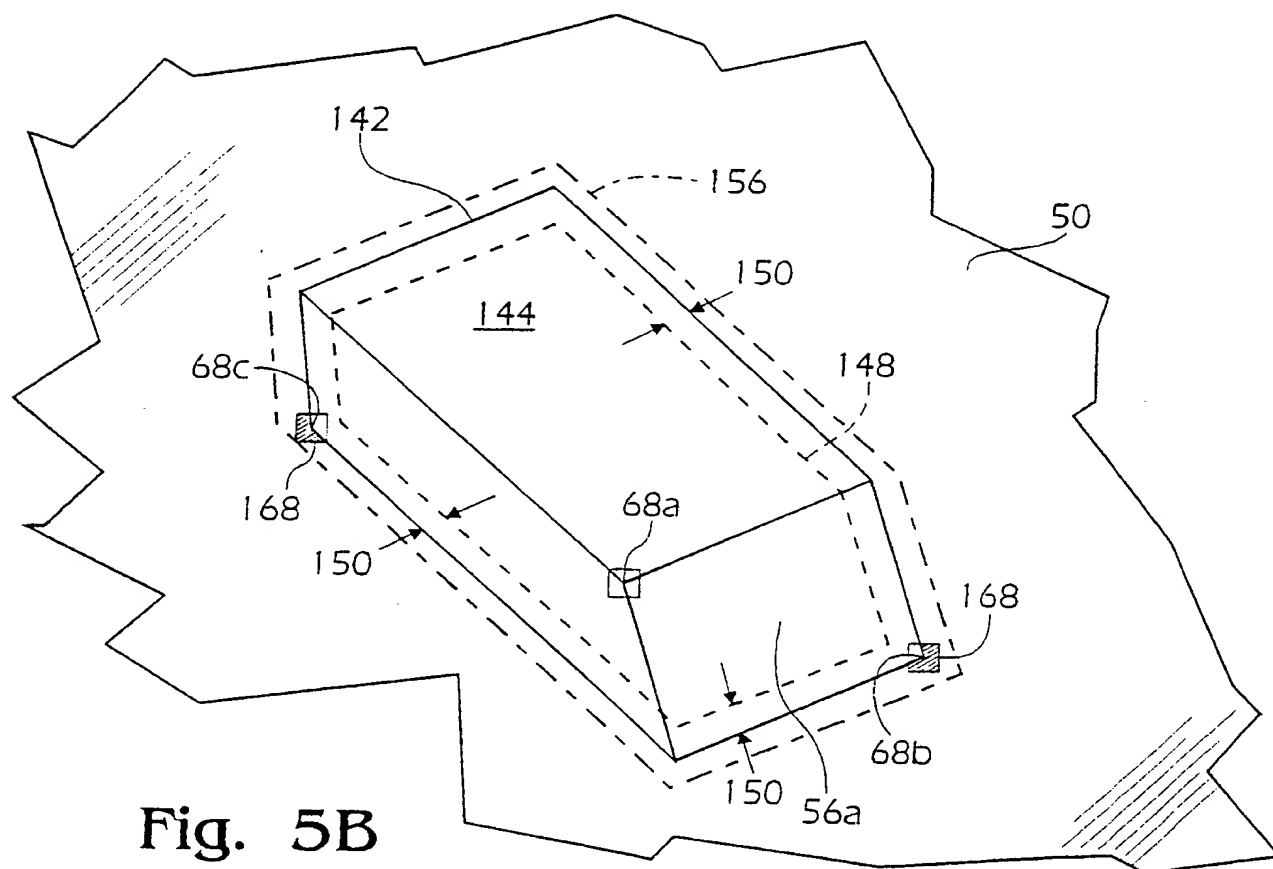


Fig. 5B

6/30

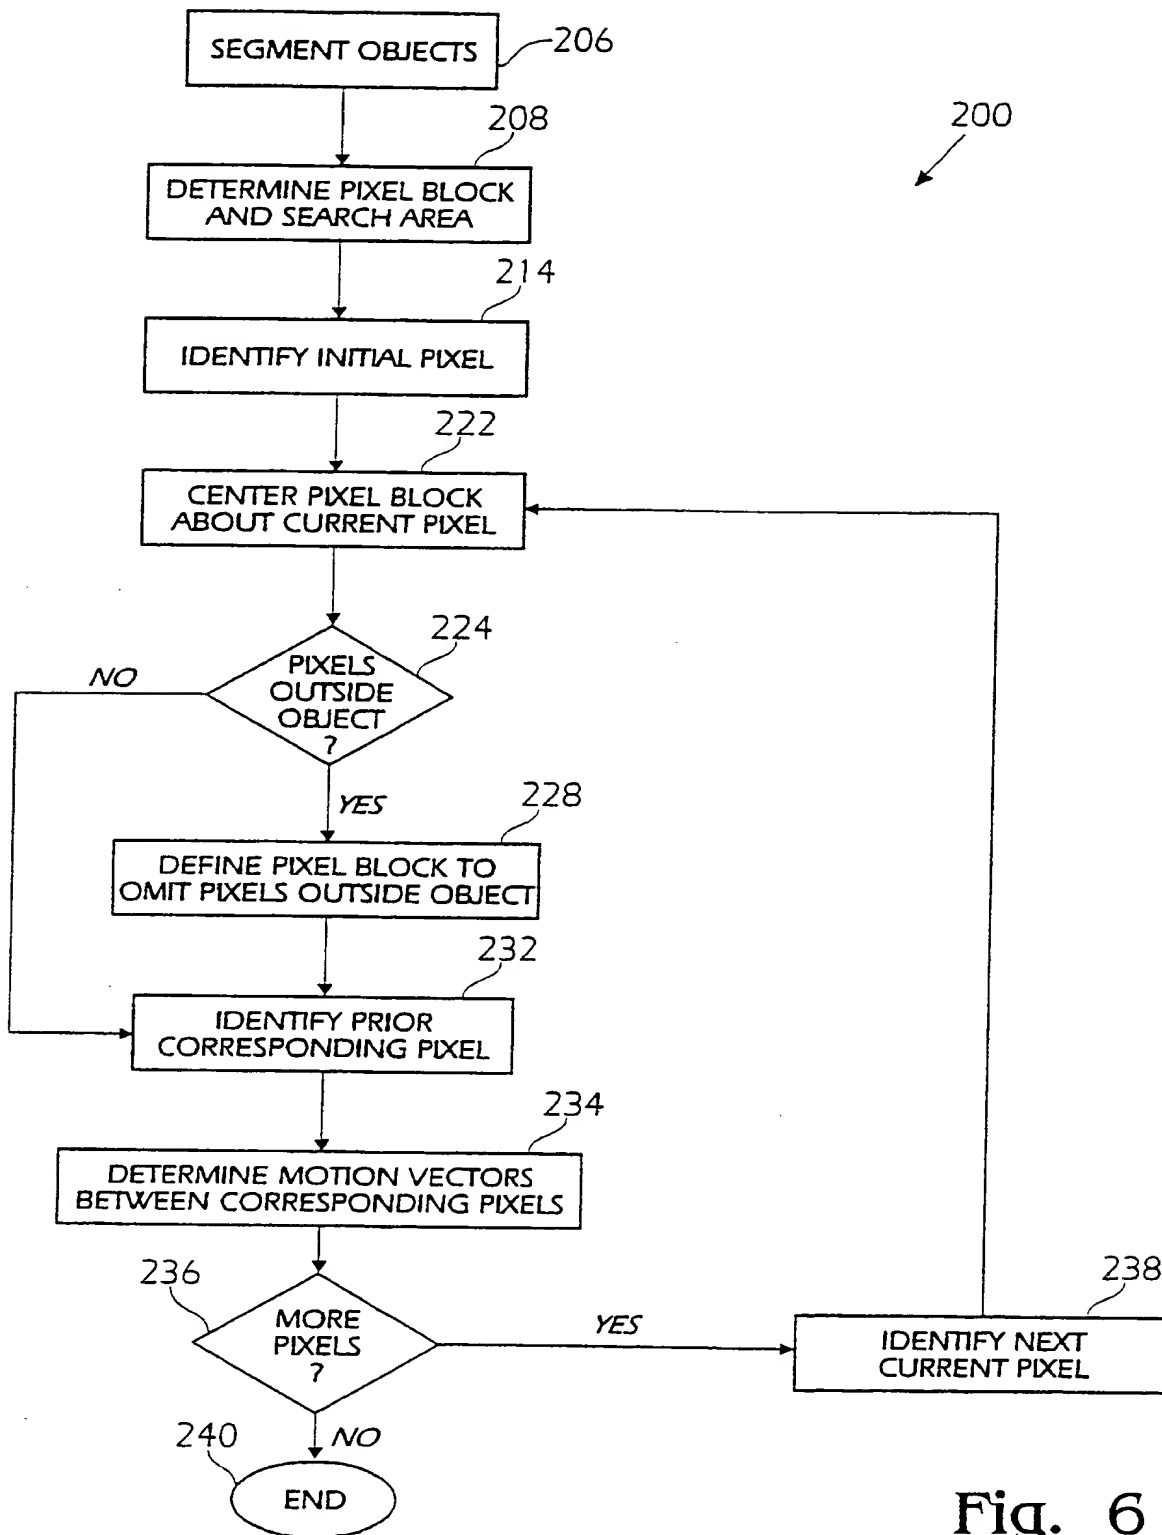


Fig. 6

7/30

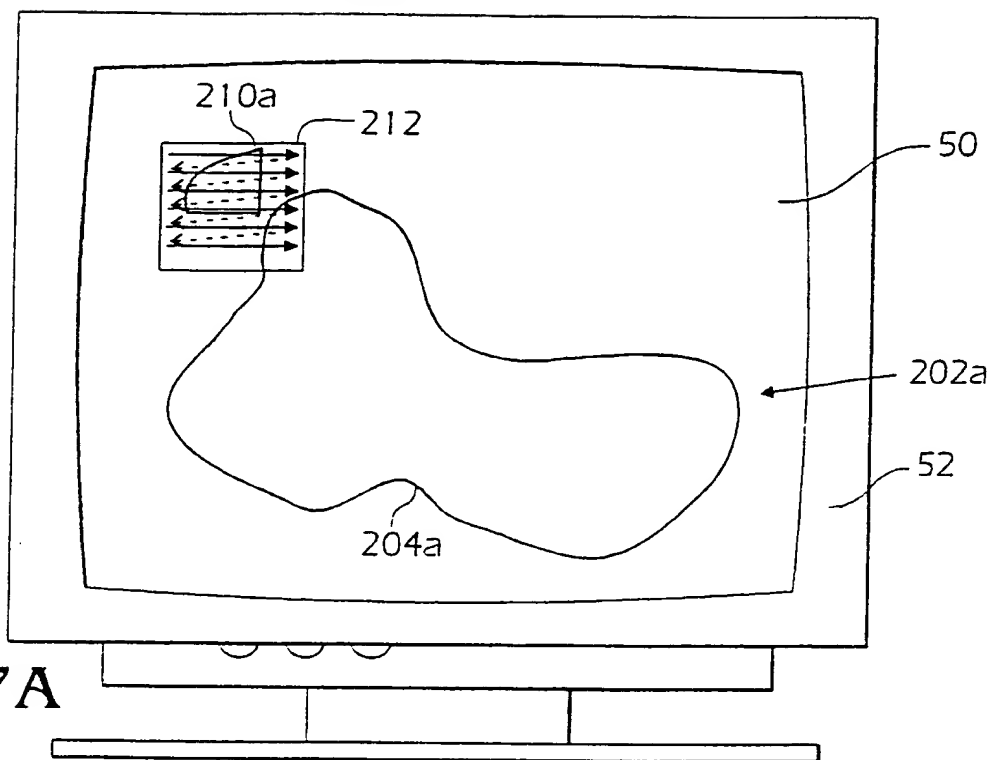


Fig. 7A

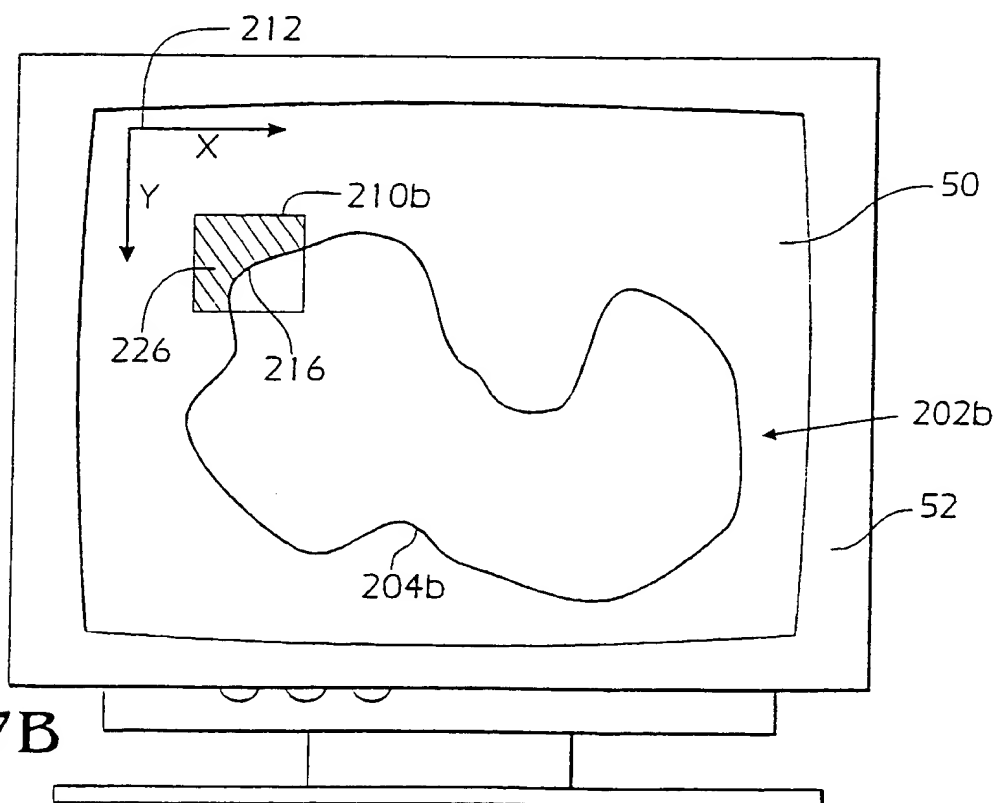


Fig. 7B

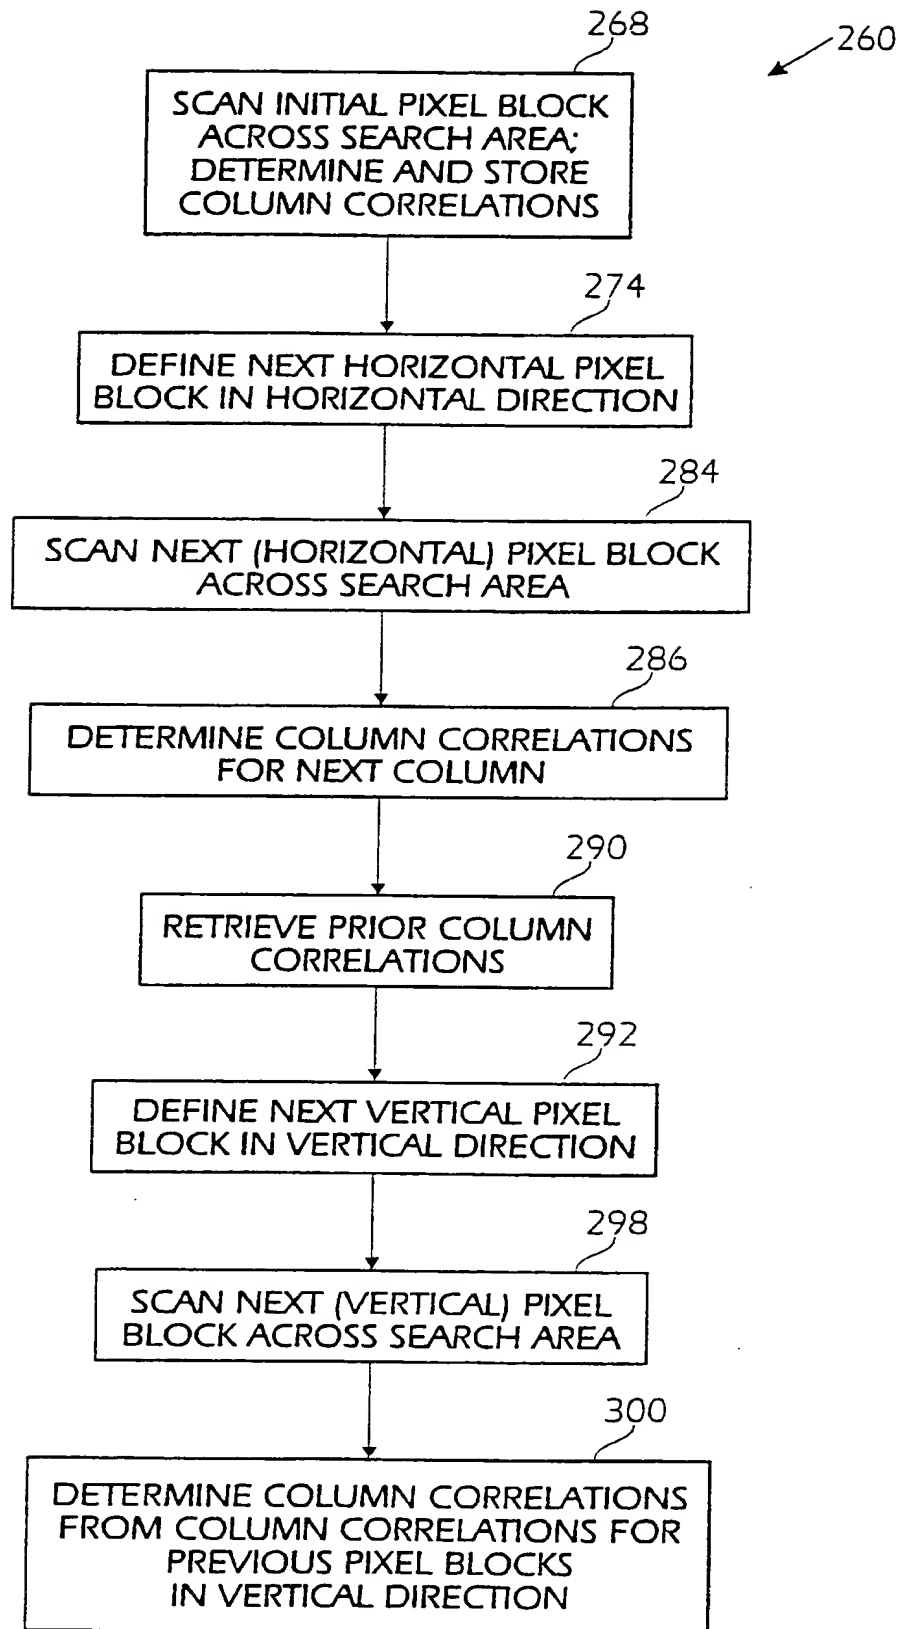


Fig. 8

9/30

Fig. 9A

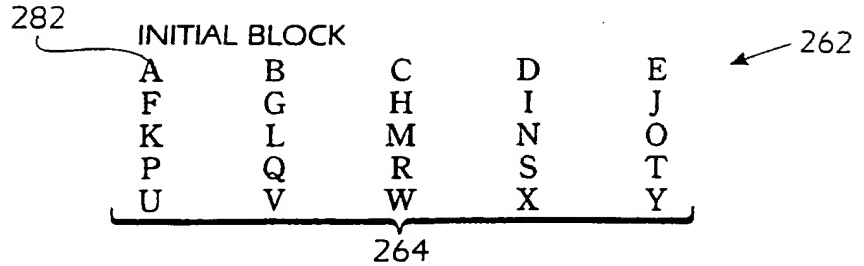


Fig. 9B

OBJECT

01	02	03	04	05	06	07	08	09	00	...
12	13	14	15	16	17	18	19	10	11	...
23	24	25	26	27	28	29	20	21	22	...
34	35	36	37	38	39	30	31	32	33	...
45	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

266

Fig. 9C

INITIAL BLOCK SCANNING OBJECT (Step 1)

01E	02	03	04	05	06	07	08	09	00	...
12J	13	14	15	16	17	18	19	10	11	...
23O	24	25	26	27	28	29	20	21	22	...
34T	35	36	37	38	39	30	31	32	33	...
45Y	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

270(1)

266

Fig. 9D

INITIAL BLOCK SCANNING OBJECT (Step 2)

01D	02E	03	04	05	06	07	08	09	00	...
12I	13J	14	15	16	17	18	19	10	11	...
23N	24O	25	26	27	28	29	20	21	22	...
34S	35T	36	37	38	39	30	31	32	33	...
45X	46Y	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

270(2) 270(3)

266

SUBSTITUTE SHEET (RULE 26)

10/30

INITIAL BLOCK SCANNING OBJECT (Step 5)

270(4)	270(5)	270(6)	270(7)	270(8)						
01A	02B	03C	04D	05E	06	07	08	09	00	...
12F	13G	14H	15I	16J	17	18	19	10	11	...
23K	24L	25M	26N	27O	28	29	20	21	22	...
34P	35Q	36R	37S	38T	39	30	31	32	33	...
45U	46V	47W	48X	49Y	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...
304(4)	304(5)	304(6)	304(7)	304(8)						

Fig. 9E

INITIAL BLOCK SCANNING OBJECT (Step 6)

270(9)	270(10)	270(11)	270(12)	270(13)						
01	02A	03B	04C	05D	06E	07	08	09	00	...
12	13F	14G	15H	16I	17J	18	19	10	11	...
23	24K	25L	26M	27N	28O	29	20	21	22	...
34	35P	36Q	37R	38S	39T	30	31	32	33	...
45	46U	47V	48W	49X	40Y	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 9F

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

270(14)	270(15)	270(16)	270(17)	270(18)						
01	02	03	04	05	06	07	08	09	00	...
12A	13B	14C	15D	16E	17	18	19	10	11	...
23F	24G	25H	26I	27J	28	29	20	21	22	...
34K	35L	36M	37N	38O	39	30	31	32	33	...
45P	46Q	47R	48S	49T	40	41	42	43	44	...
56U	57V	58W	59X	50Y	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 9G

Fig. 10A

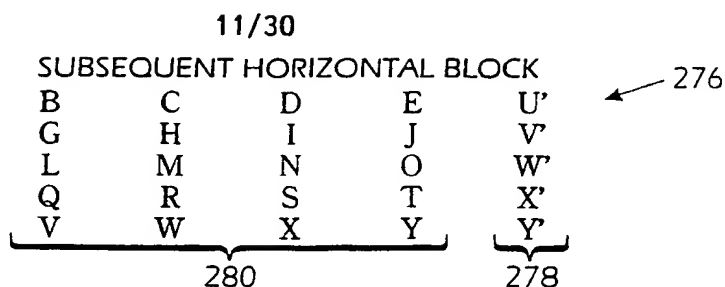


Fig. 10B

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 1)

288(1)										
01 U'	02	03	04	05	06	07	08	09	00	...
12 V'	13	14	15	16	17	18	19	10	11	...
23 W'	24	25	26	27	28	29	20	21	22	...
34 X'	35	36	37	38	39	30	31	32	33	...
45 Y'	46	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10C

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 2)

270'(1) 288(2)										
01 E	02 U'	03	04	05	06	07	08	09	00	...
12 J	13 V'	14	15	16	17	18	19	10	11	...
23 O	24 W'	25	26	27	28	29	20	21	22	...
34 T	35 X'	36	37	38	39	30	31	32	33	...
45 Y	46 Y'	47	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10D

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 3)

270'(2) 270'(3) 288(3)										
01 D	02 E	03 U'	04	05	06	07	08	09	00	...
12 I	13 J	14 V'	15	16	17	18	19	10	11	...
23 N	24 O	25 W'	26	27	28	29	20	21	22	...
34 S	35 T	36 X'	37	38	39	30	31	32	33	...
45 X	46 Y	47 Y'	48	49	40	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

SUBSTITUTE SHEET (RULE 26)

12/30

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step 6)

	270'(5)	270'(6)	270'(7)	270'(8)	288(4)					
01	02 B	03 C	04 D	05 E	06 U'	07	08	09	00	...
12	13 G	14 H	15 I	16 J	17 V'	18	19	10	11	...
23	24 L	25 M	26 N	27 O	28 W'	29	20	21	22	...
34	35 Q	36 R	37 S	38 T	39 X'	30	31	32	33	...
45	46 V	47 W	48 X	49 Y	40 Y'	41	42	43	44	...
56	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10E

SUBSEQUENT HORIZONTAL BLOCK SCANNING OBJECT (Step Q+6)

	270'(15)	270'(16)	270'(17)	270'(18)	288(5)					
01	02	03	04	05	06	07	08	09	00	...
12	13 B	14 C	15 D	16 E	17 U'	18	19	10	11	...
23	24 G	25 H	26 I	27 J	28 V'	29	20	21	22	...
34	35 L	36 M	37 N	38 O	39 W'	30	31	32	33	...
45	46 Q	47 R	48 S	49 T	40 X'	41	42	43	44	...
56	57 V	58 W	59 X	50 Y	51 Y'	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 10F

Fig. 1 1A

SUBSEQUENT VERTICAL BLOCK					294
F	G	H	I	J	
K	L	M	N	O	
P	Q	R	S	T	
U	V	W	X	Y	
A'	B'	C'	D'	E'	
296					

Fig. 1 1B

INITIAL BLOCK SCANNING OBJECT (Step Q+1)

01	02	03	04	05	06	07	08	09	00	...
12 J	13	14	15	16	17	18	19	10	11	...
23 O	24	25	26	27	28	29	20	21	22	...
34 T	35	36	37	38	39	30	31	32	33	...
45 Y	46	47	48	49	40	41	42	43	44	...
56 E'	57	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 1 1C

INITIAL BLOCK SCANNING OBJECT (Step Q+2)

01	02	03	04	05	06	07	08	09	00	...
12 I	13 J	14	15	16	17	18	19	10	11	...
23 N	24 O	25	26	27	28	29	20	21	22	...
34 S	35 T	36	37	38	39	30	31	32	33	...
45 X	46 Y	47	48	49	40	41	42	43	44	...
56 D'	57 E'	58	59	50	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...

Fig. 1 1D

INITIAL BLOCK SCANNING OBJECT (Step Q+5)

01	02	03	04	05	06	07	08	09	00	...
12 F	13 G	14 H	15 I	16 J	17	18	19	10	11	...
23 K	24 L	25 M	26 N	27 O	28	29	20	21	22	...
34 P	35 Q	36 R	37 S	38 T	39	30	31	32	33	...
45 U	46 V	47 W	48 X	49 Y	40	41	42	43	44	...
56 A'	57 B'	58 C'	59 D'	50 E'	51	52	53	54	55	...
67	68	69	60	61	62	63	64	65	66	...
78	79	70	71	72	73	74	75	76	77	...
89	80	81	82	83	84	85	86	87	88	...
90	91	92	93	94	95	96	97	98	99	...
304'(4)	304'(5)	304'(6)	304'(7)	304'(8)						

14/30

INITIAL BLOCK SCANNING OBJECT (Step Q+6)

	302(9)	302(10)	302(11)	302(12)	302(13)				
01	02	03	04	05	06	07	08	09	00
12	13 F	14 G	15 H	16 O	17 J	18	19	10	11
23	24 K	25 L	26 M	27 N	28 O	29	20	21	22
34	35 P	36 Q	37 R	38 S	39 T	30	31	32	33
45	46 U	47 V	48 W	49 X	40 Y	41	42	43	44
56	57 A'	58 B'	59 C'	50 D'	51 E'	52	53	54	55
67	68	69	60	61	62	63	64	65	66
78	79	70	71	72	73	74	75	76	77
89	80	81	82	83	84	85	86	87	88
90	91	92	93	94	95	96	97	98	99

Fig. 11E

INITIAL BLOCK SCANNING OBJECT (Step 2Q+5)

302(14)	302(15)	302(16)	302(17)	302(18)					
05	02	03	04	06	07	08	09	00	...
10	13	14	15	17	18	19	10	11	...
23 F	24 G	25 H	26 I	J	28	29	20	21	...
34 K	35 L	36 M	37 N	O	39	30	31	32	...
45 P	46 Q	47 R	48 S	T	40	41	42	43	...
56 U	57 V	58 W	59 X	Y	51	52	53	54	...
67 A'	68 B'	69 C'	60 D'	E'	62	63	64	65	...
78	79	70	71	73	74	75	76	77	...
89	80	81	82	84	85	86	87	88	...
90	91	92	93	95	96	97	98	99	...

Fig. 11F

Fig. 12

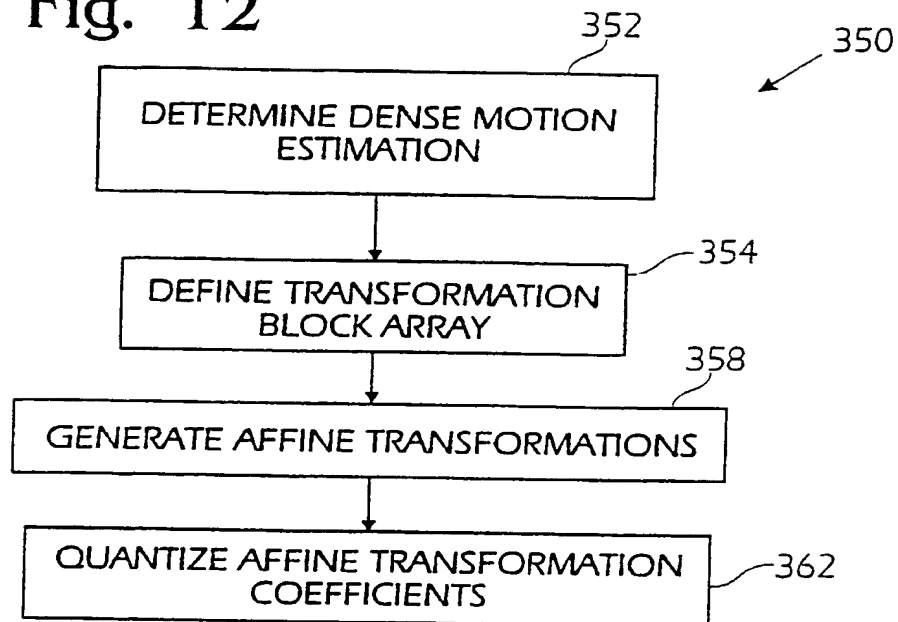
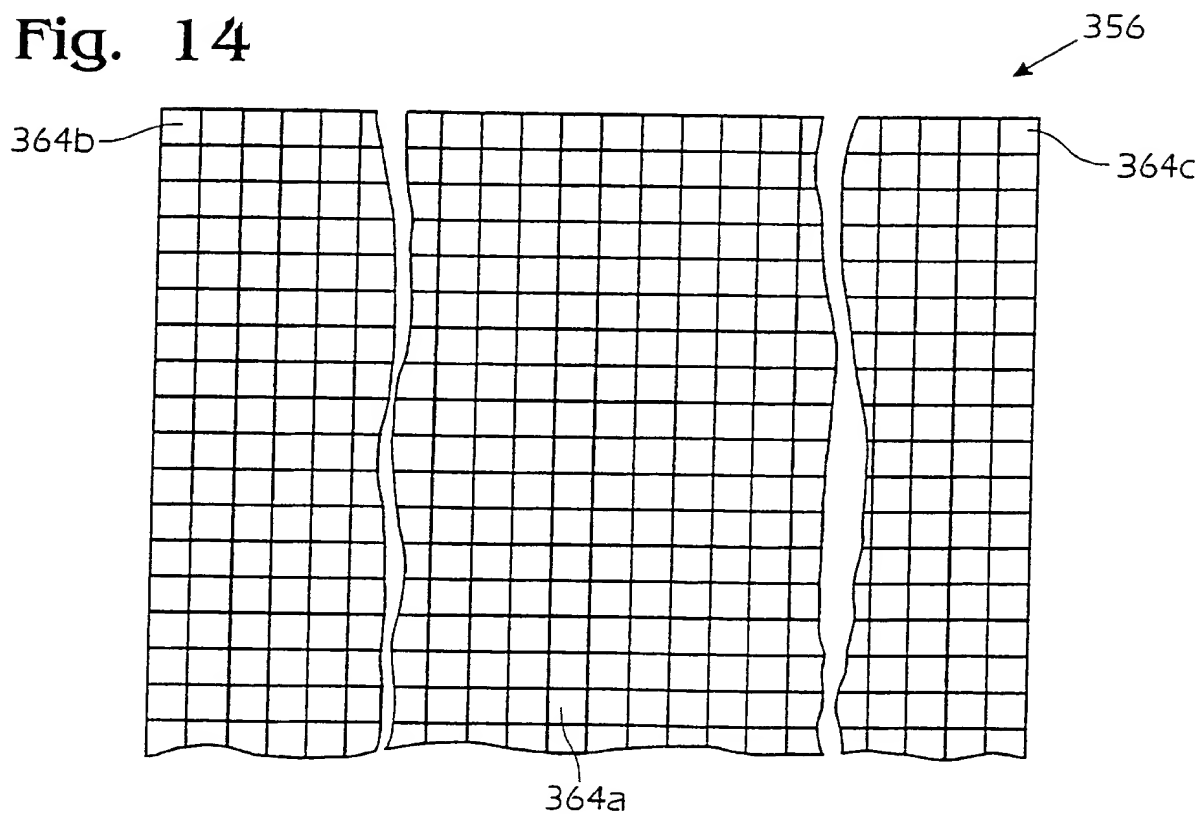


Fig. 14



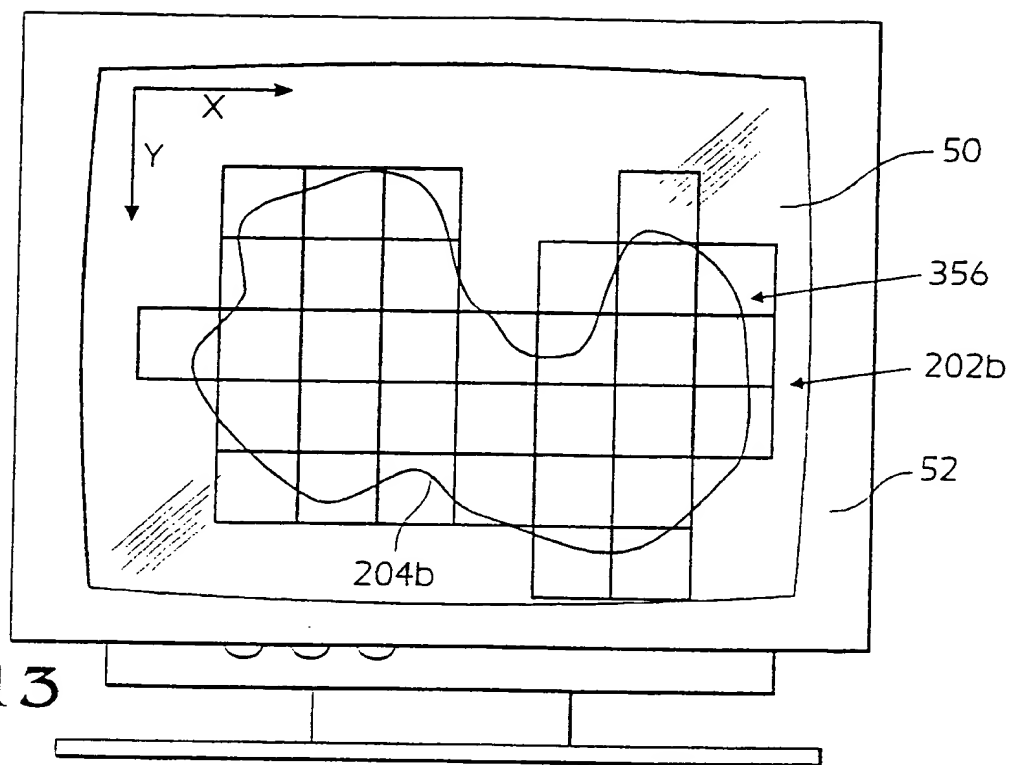


Fig. 13


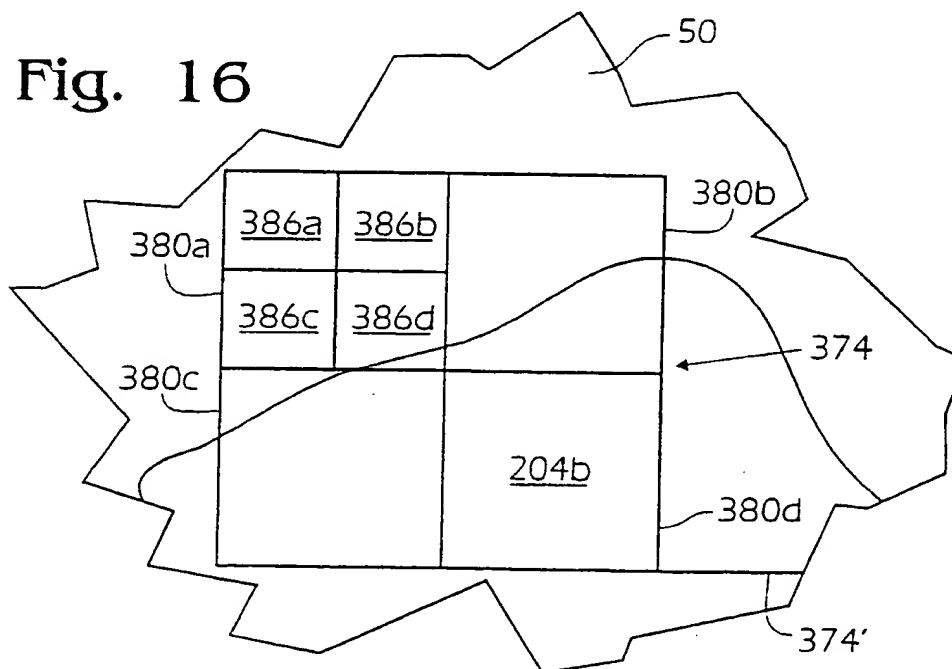


Fig. 16


17/30

Fig. 15

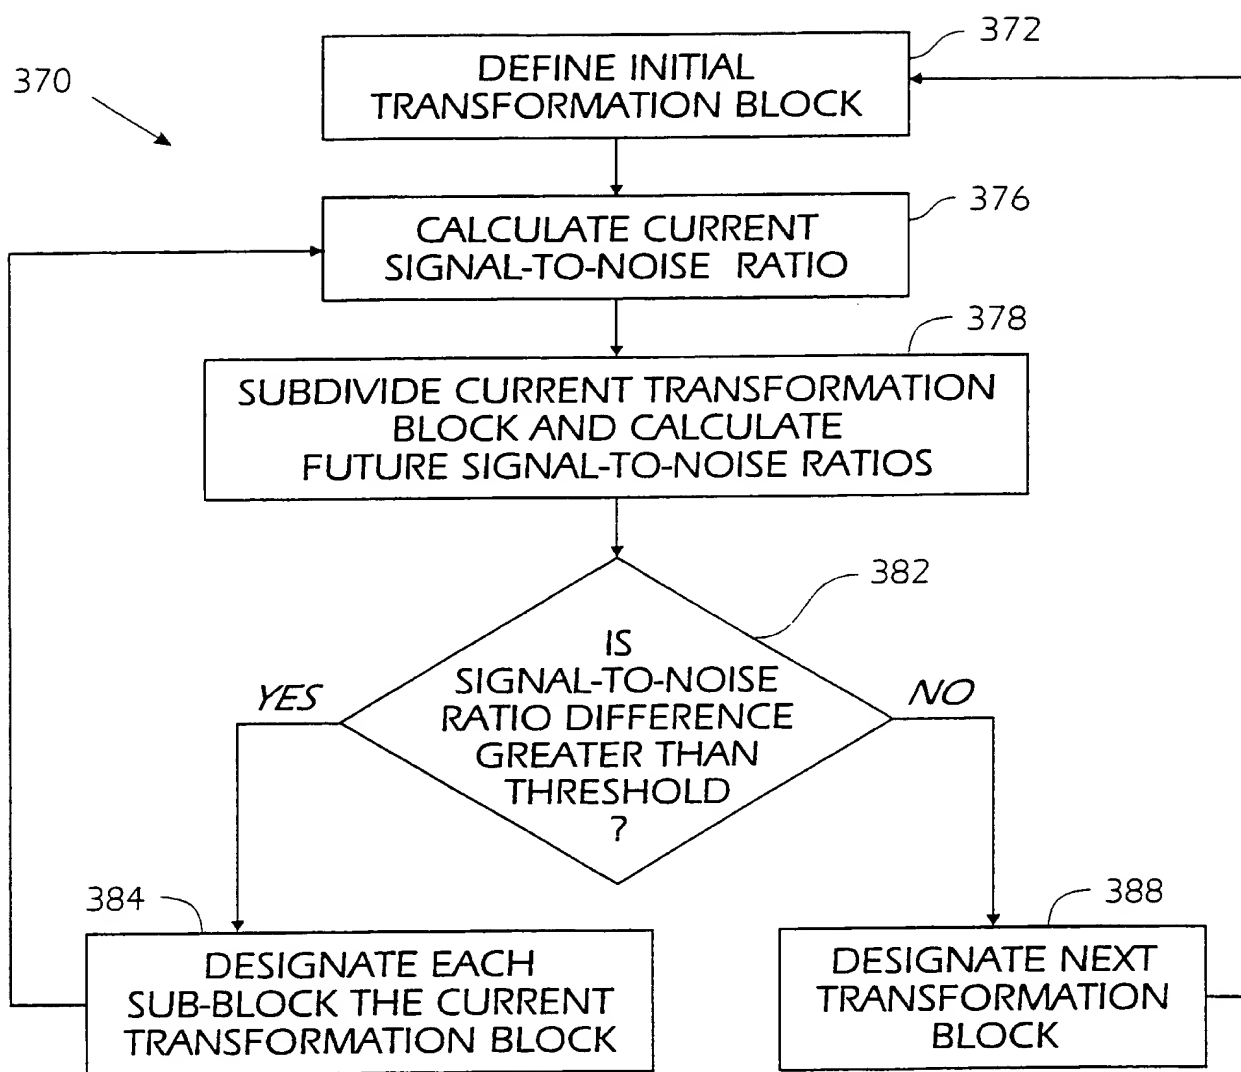

SUBSTITUTE SHEET (RULE 26)

Fig. 17A

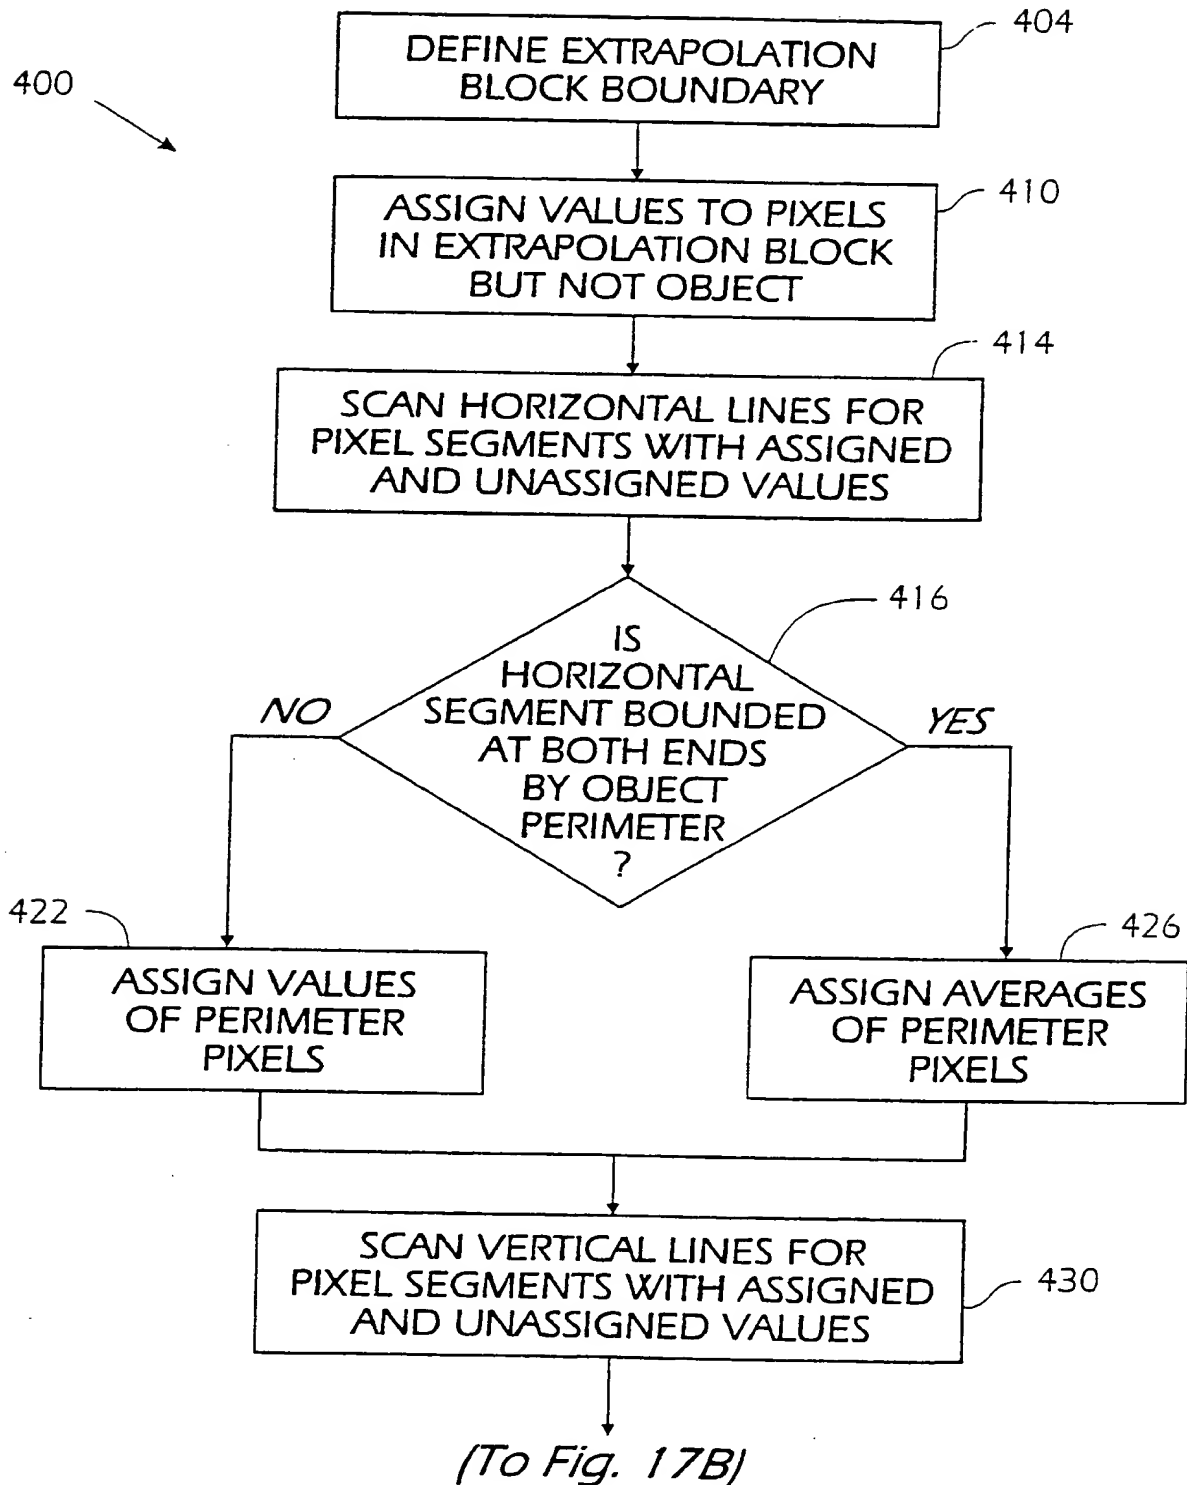

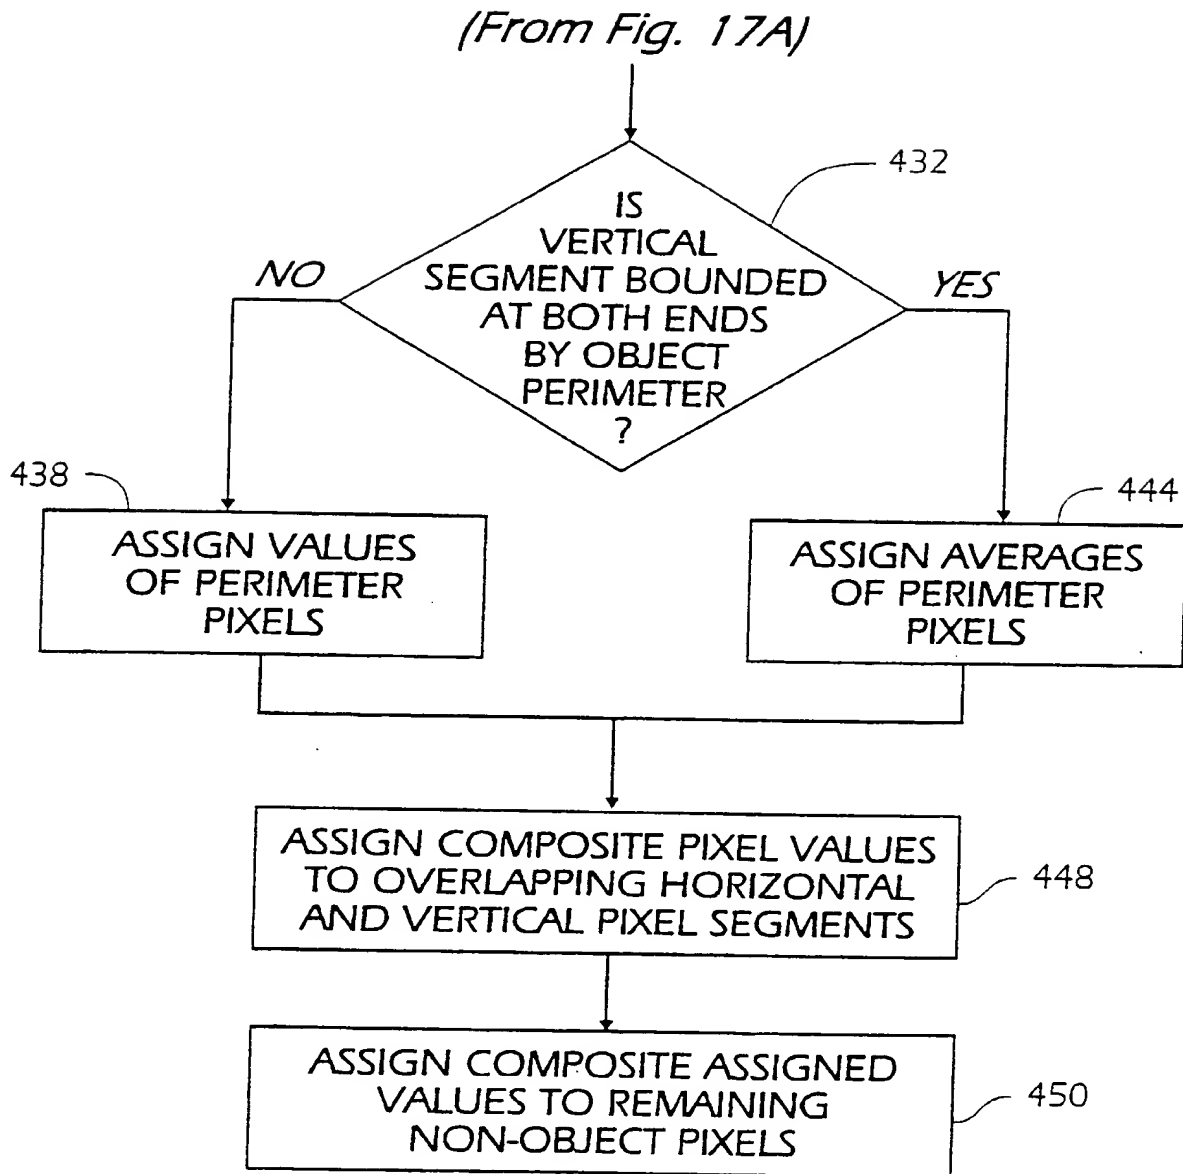


Fig. 17B

Fig. 18A

20/30

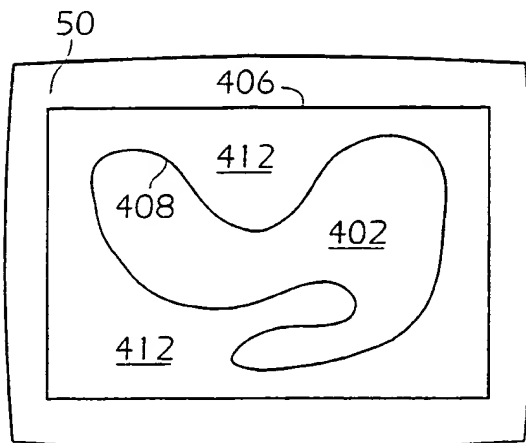


Fig. 18B

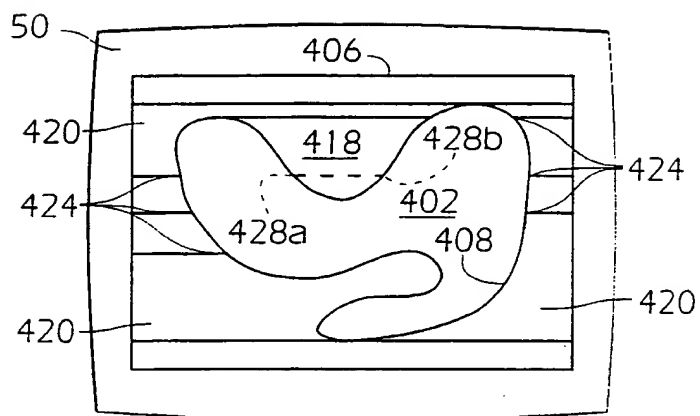


Fig. 18C


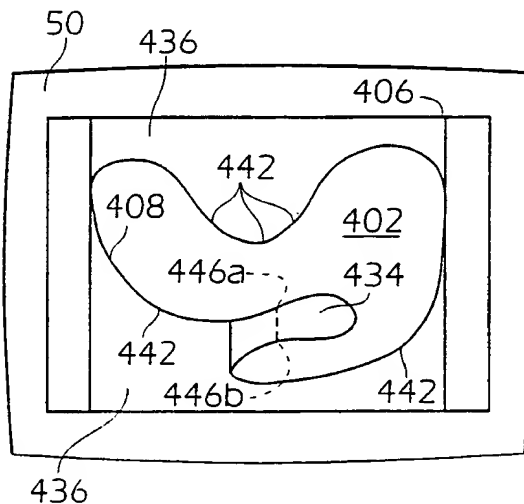


Fig. 18D

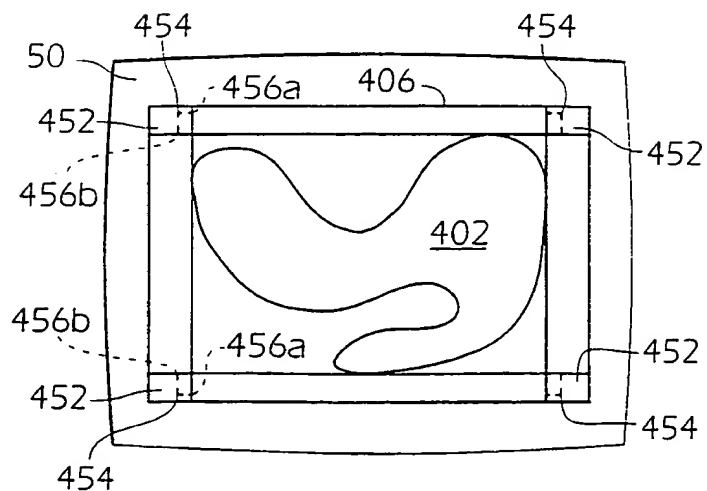

SUBSTITUTE SHEET (RULE 26)

Fig. 19A

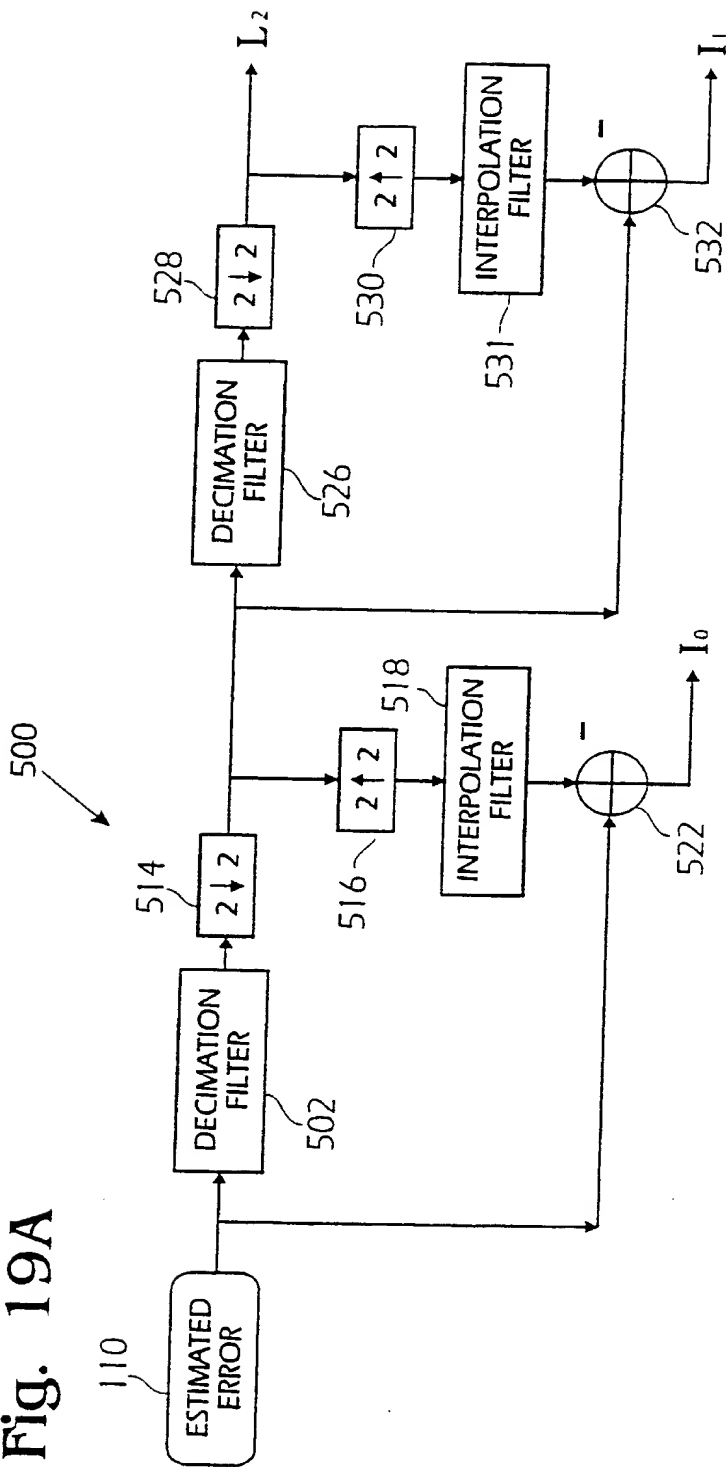


Fig. 19B

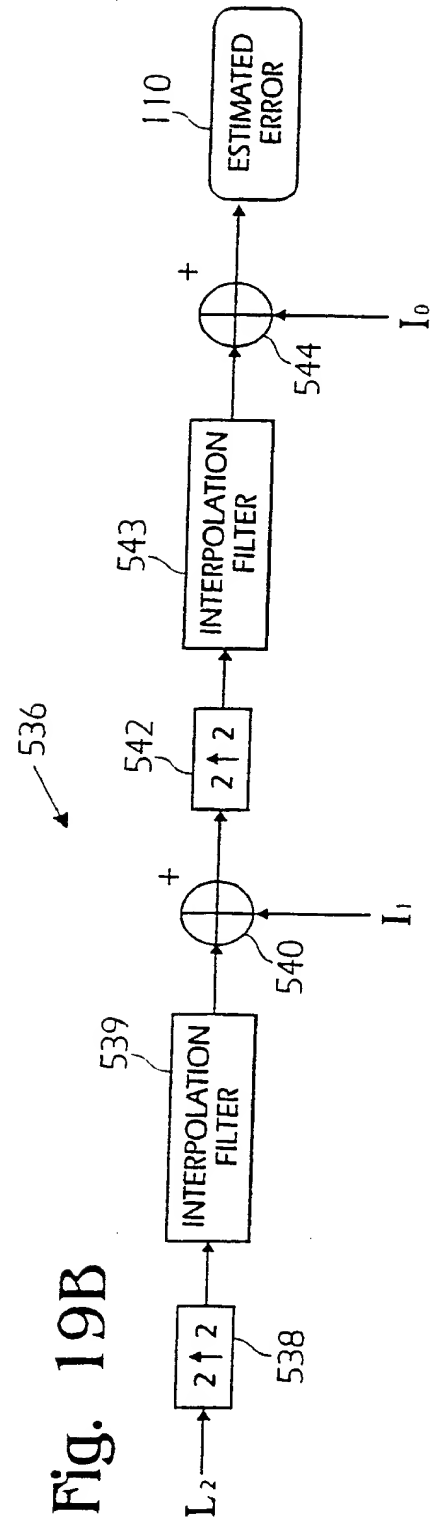


Fig. 3B

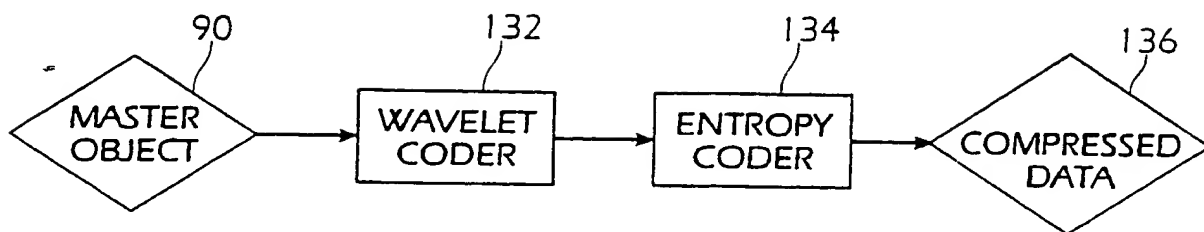


Fig. 23B

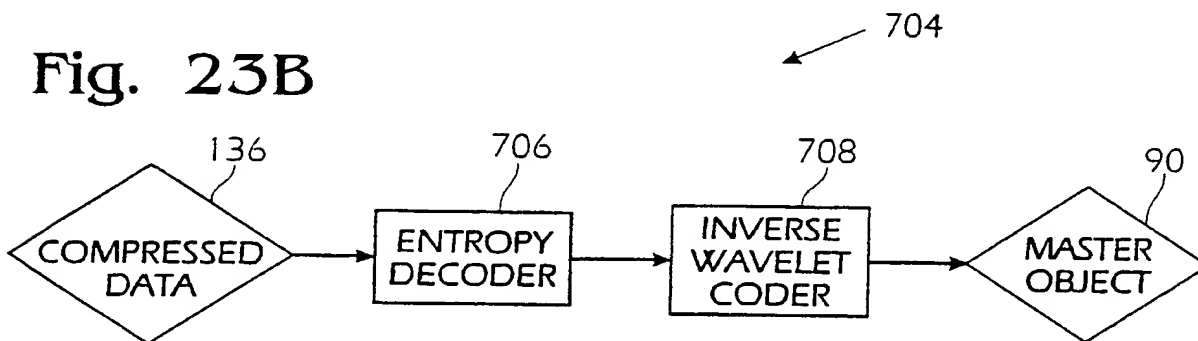


Fig. 20A

4	6	8	10	15	12	4	12	15	
5	8	9	10	14	15	10	12	14	
6	10	10	9	13	11	9	9	9	
7	12	11	8	11	8	6	5	8	
8	13	9	11	7	9	5	2	4	

Fig. 20C

8	10	12
10	10	9

Fig. 20B

8	9	10	12	12
9	10	10	11	11
10	10	10	9	9

Fig. 20D

8	9	10	11	12
9	9	10	10	10.5
10	10	10	9.5	9

Fig. 21



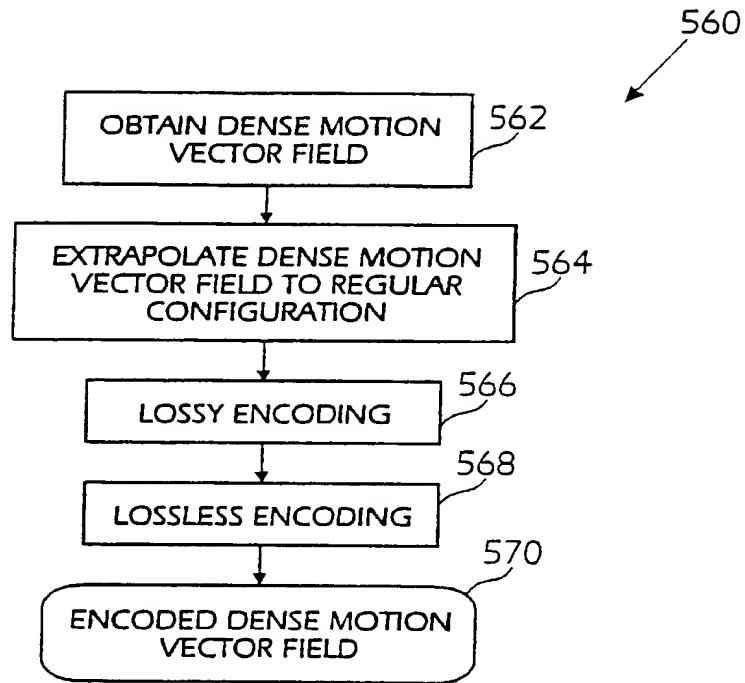


Fig. 22

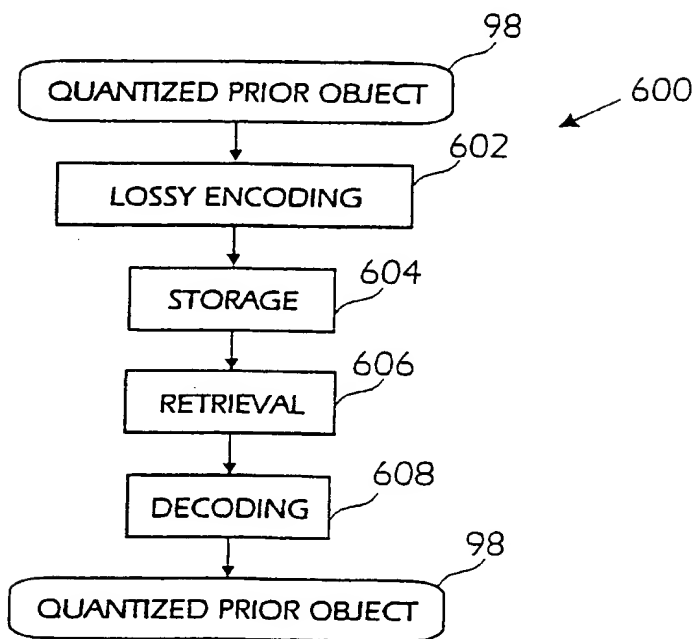

24/30

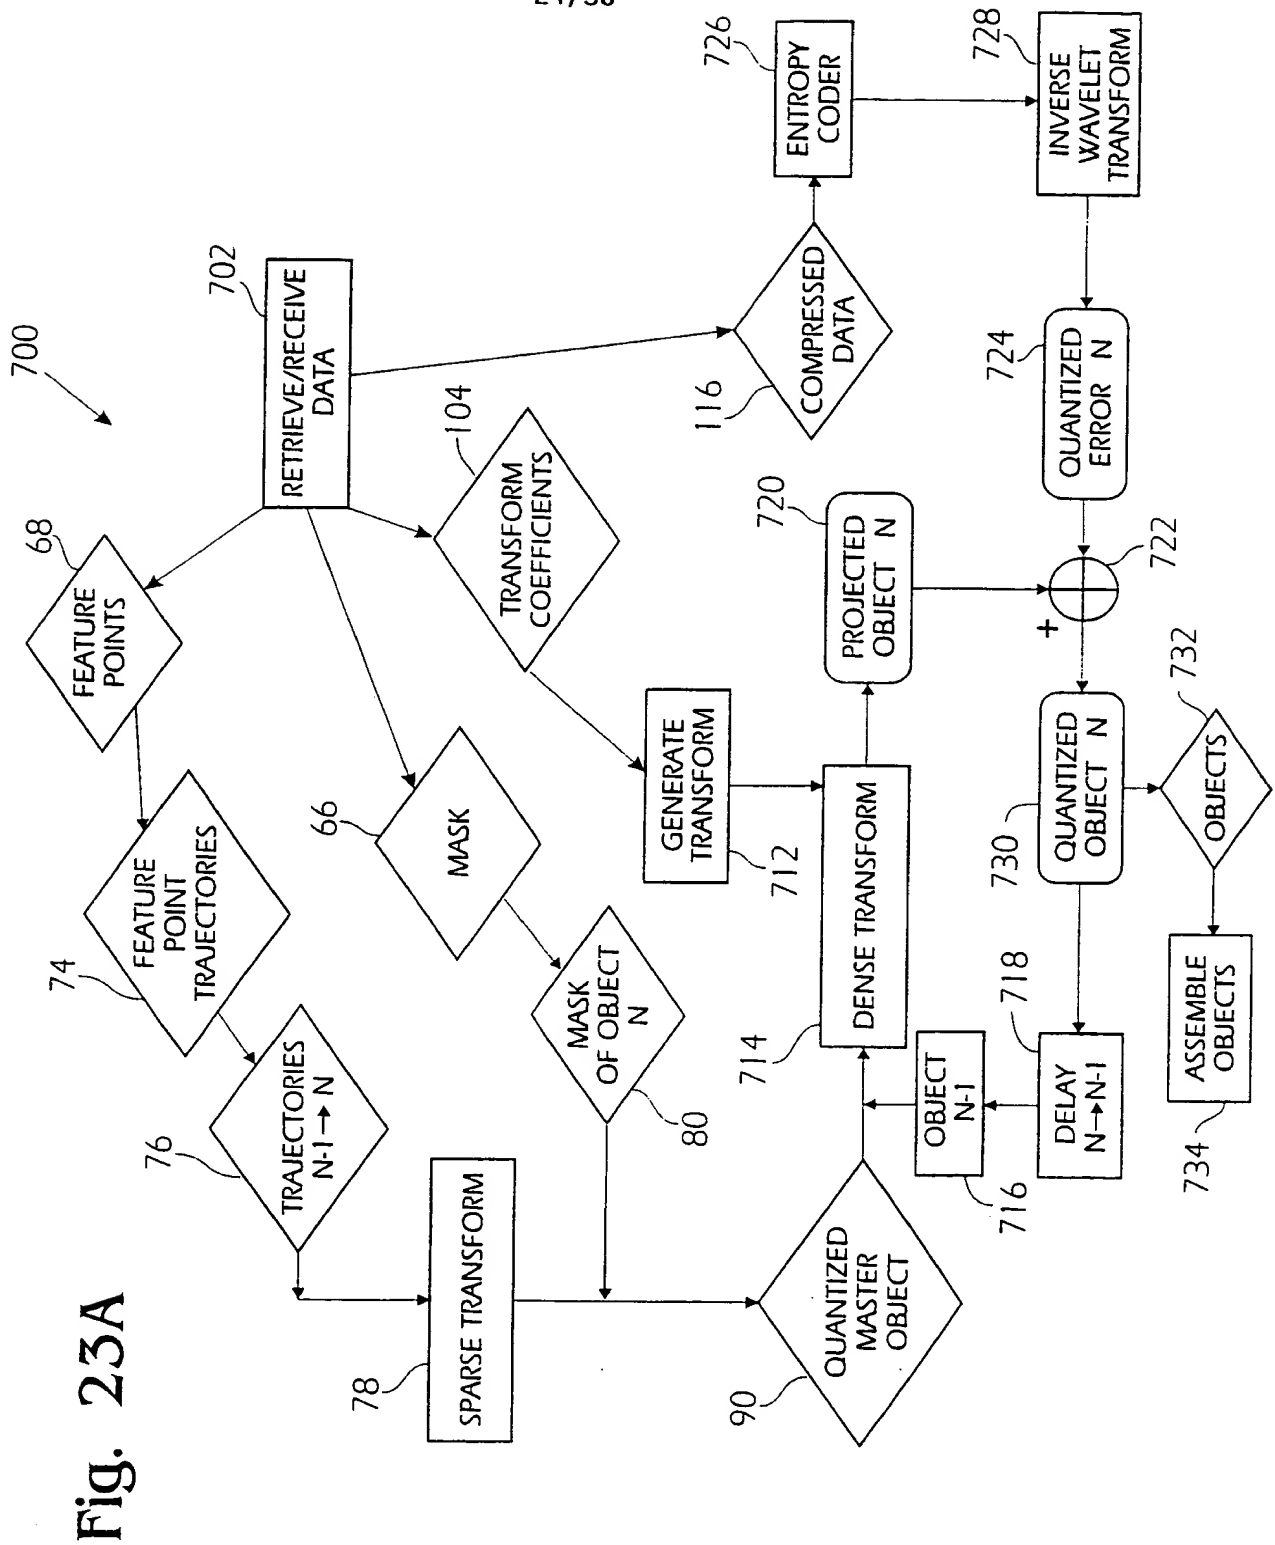

SUBSTITUTE SHEET (RULE 26)

Fig. 24A
PRIOR ART

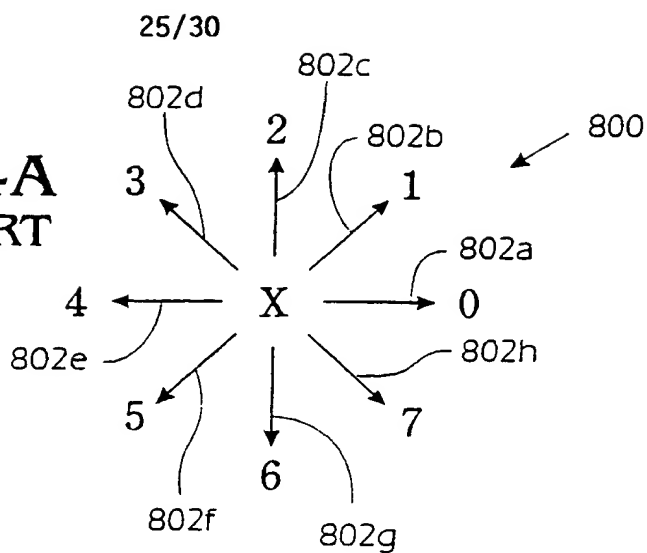


Fig. 24B
PRIOR ART

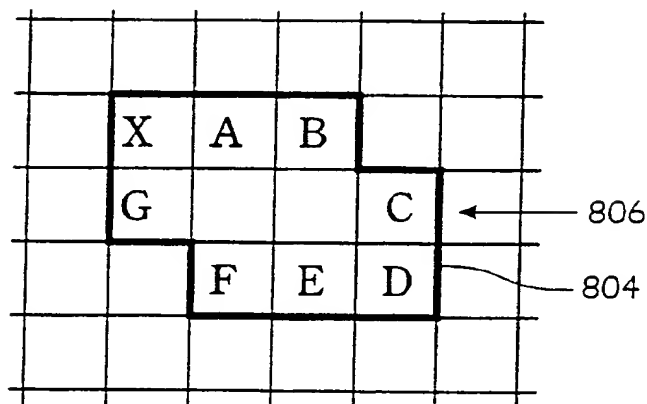


Fig. 25B


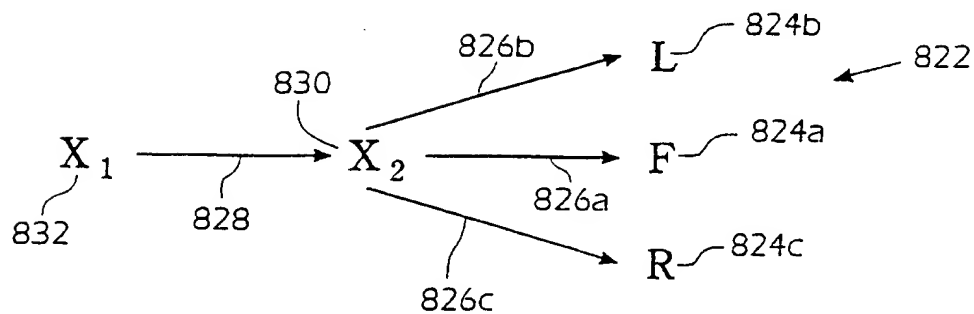


Fig. 25A

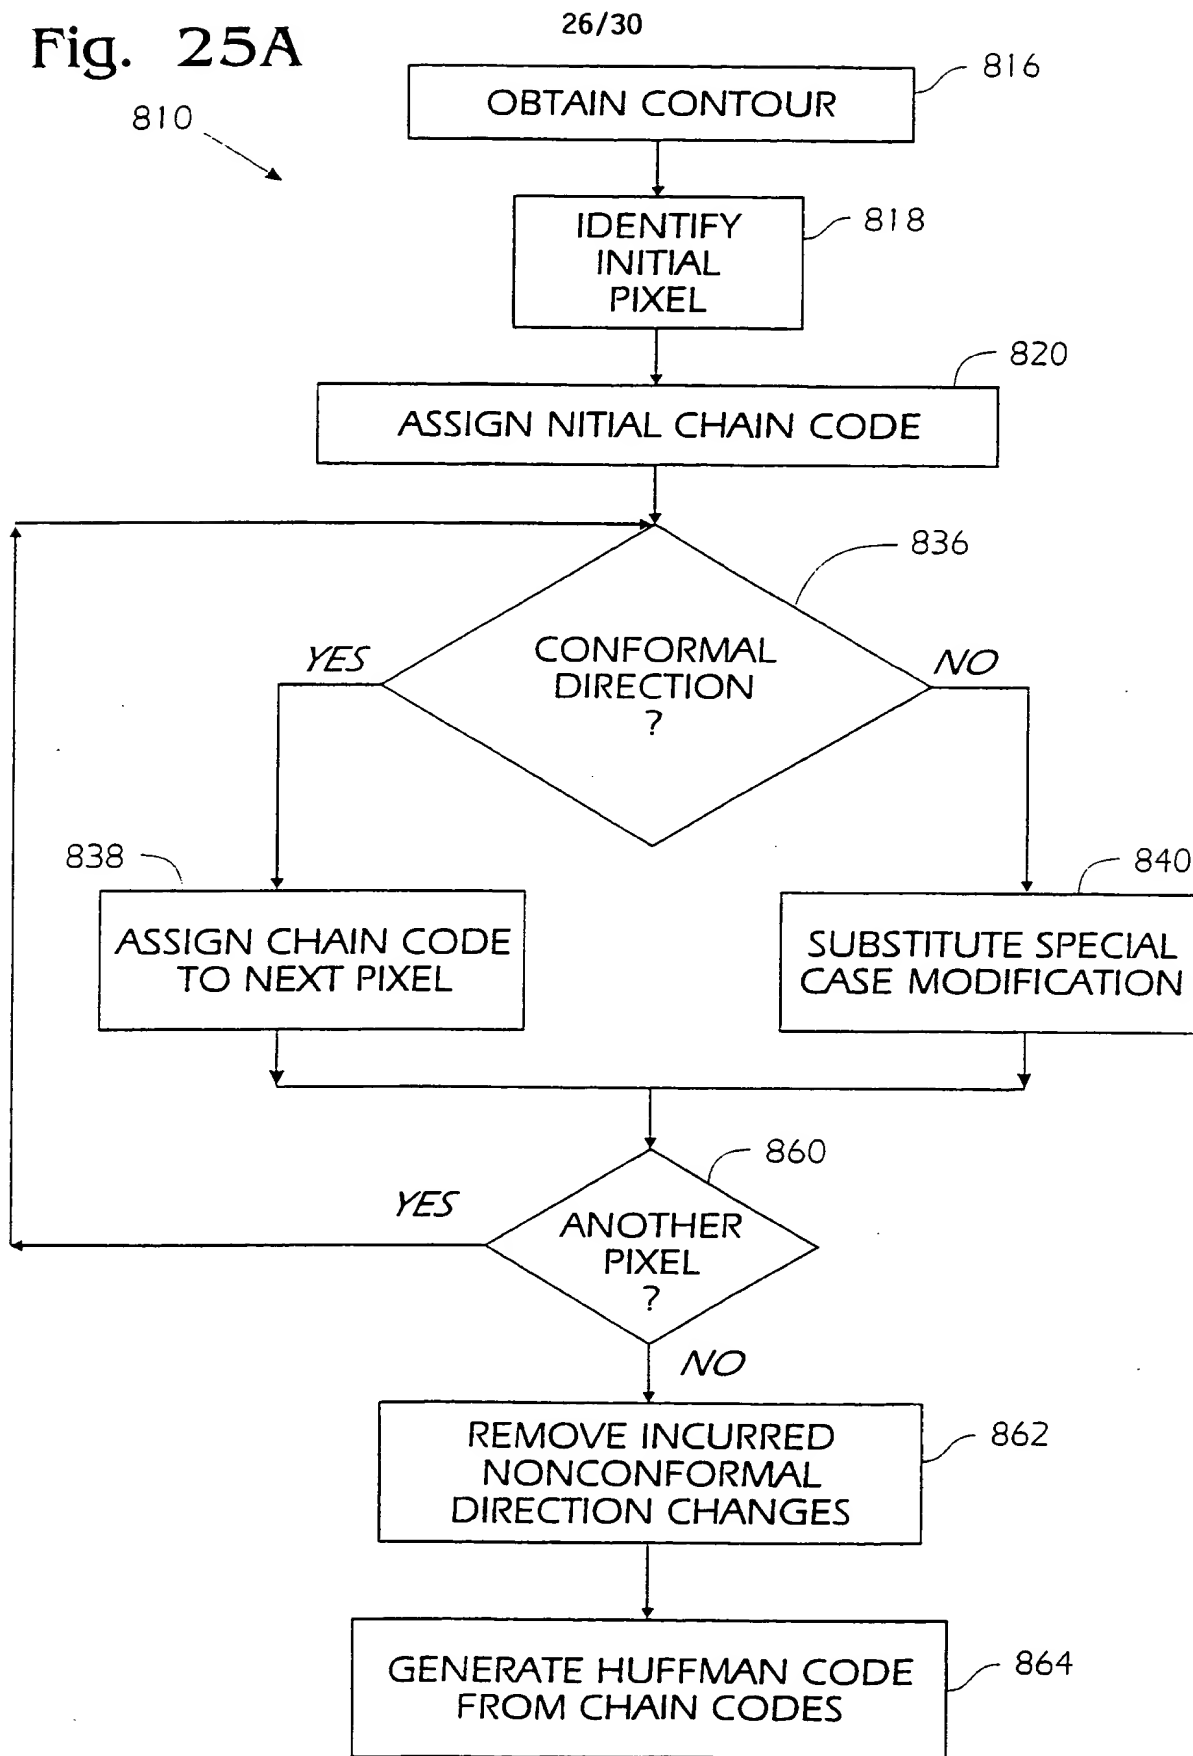

SUBSTITUTE SHEET (RULE 26)


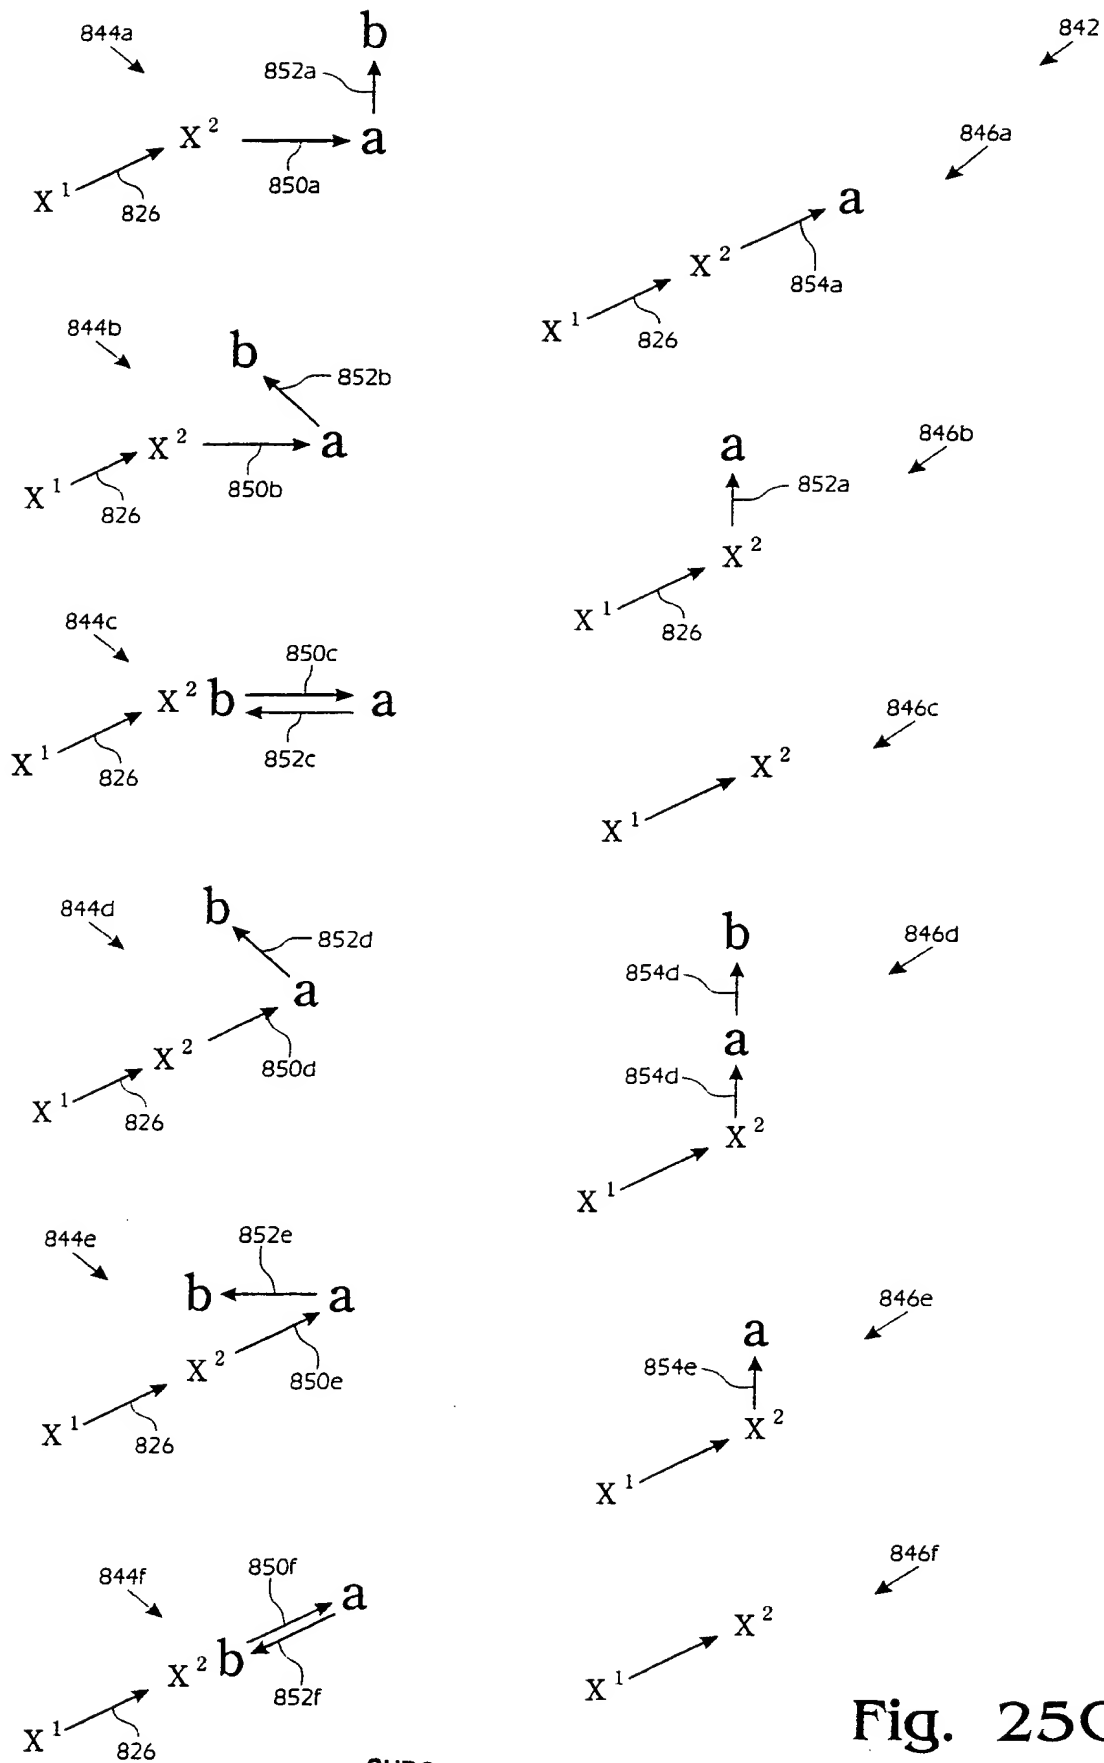


Fig. 25C


SUBSTITUTE SHEET (RULE 26)

Fig. 26A

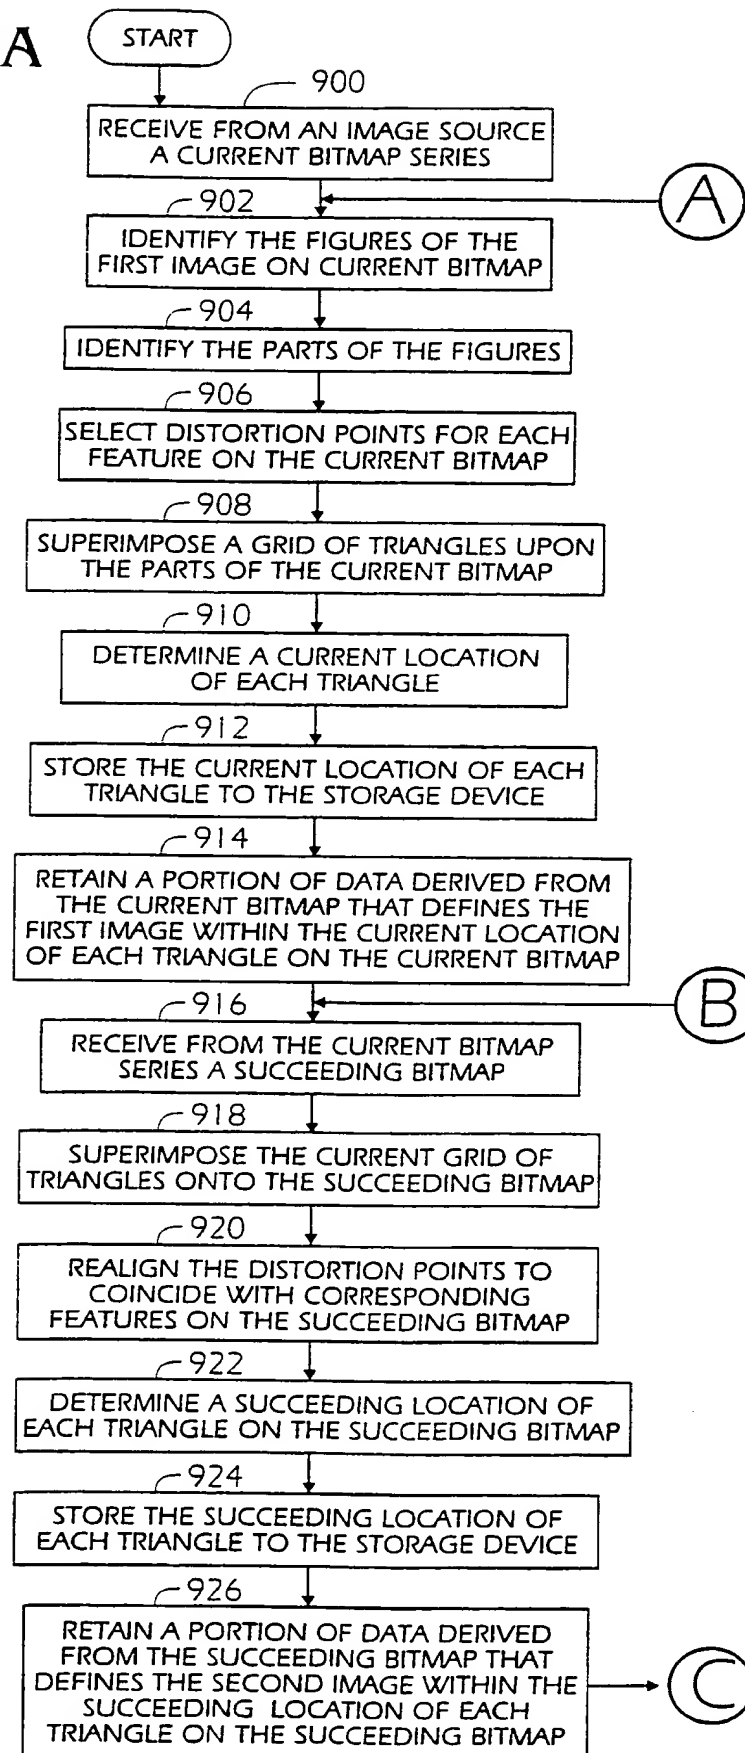

SUBSTITUTE SHEET (RULE 26)

Fig. 26B

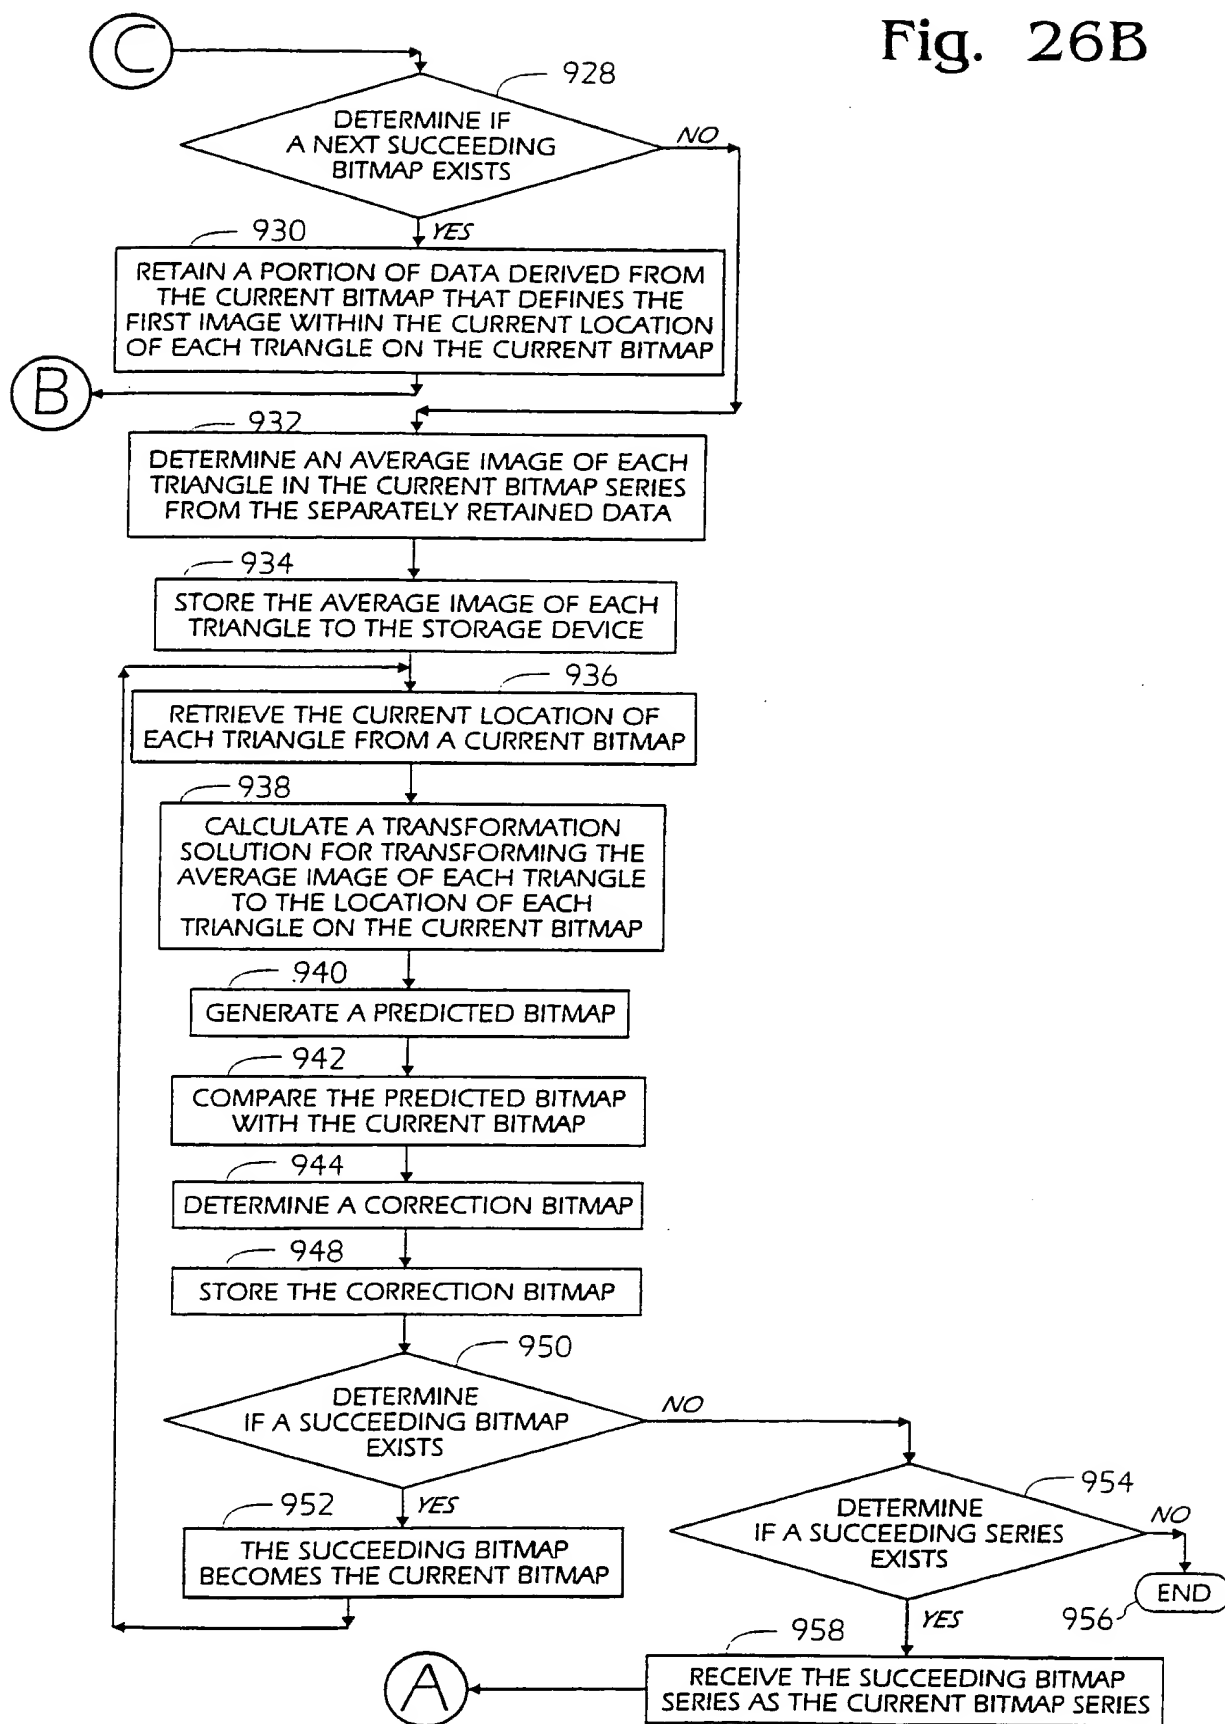

SUBSTITUTE SHEET (RULE 26)

Fig. 27B


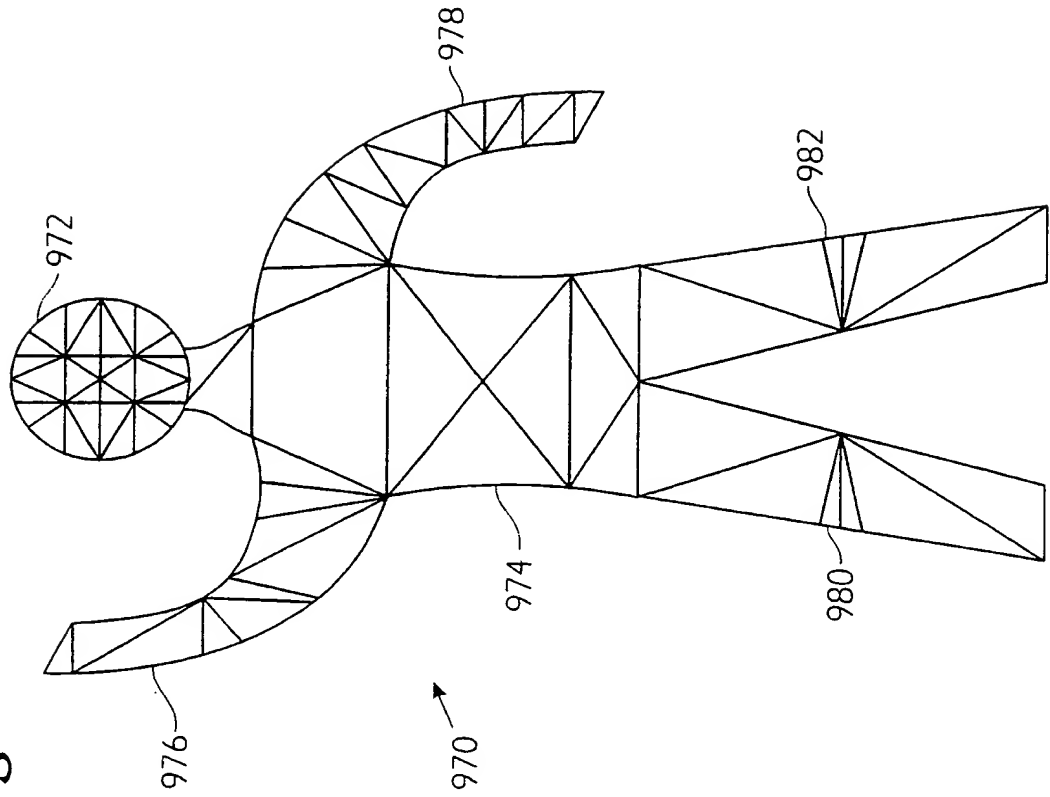


Fig. 27A

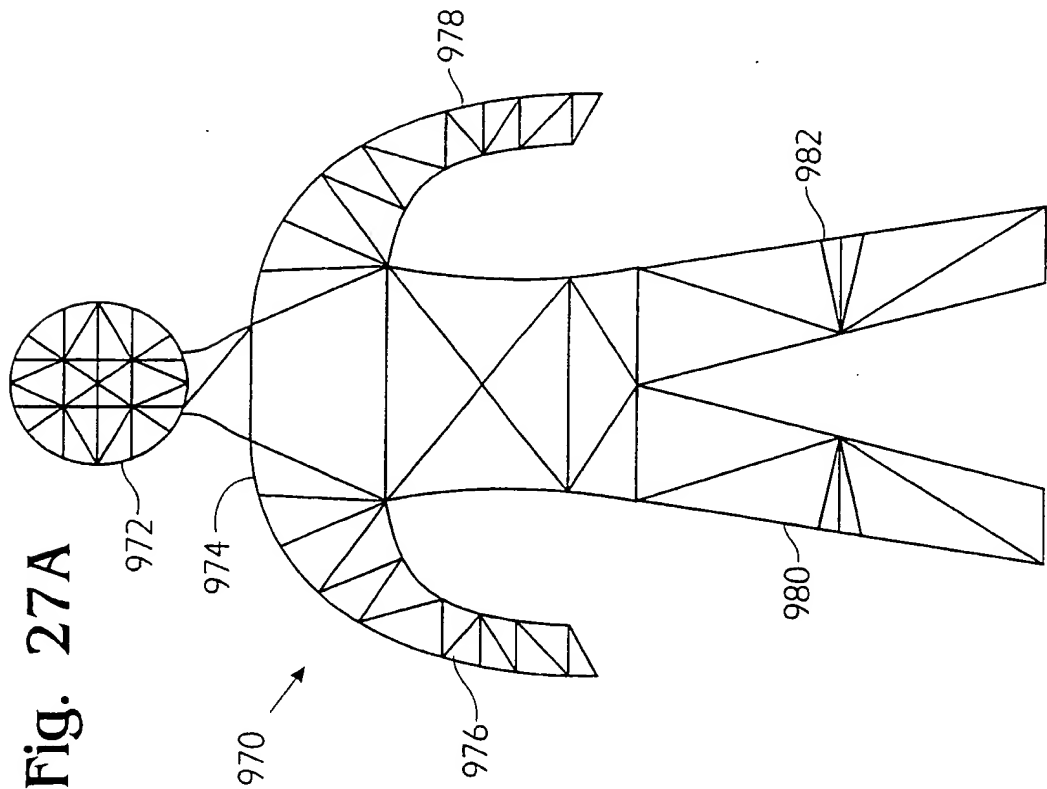

SUBSTITUTE SHEET (RULE 26)

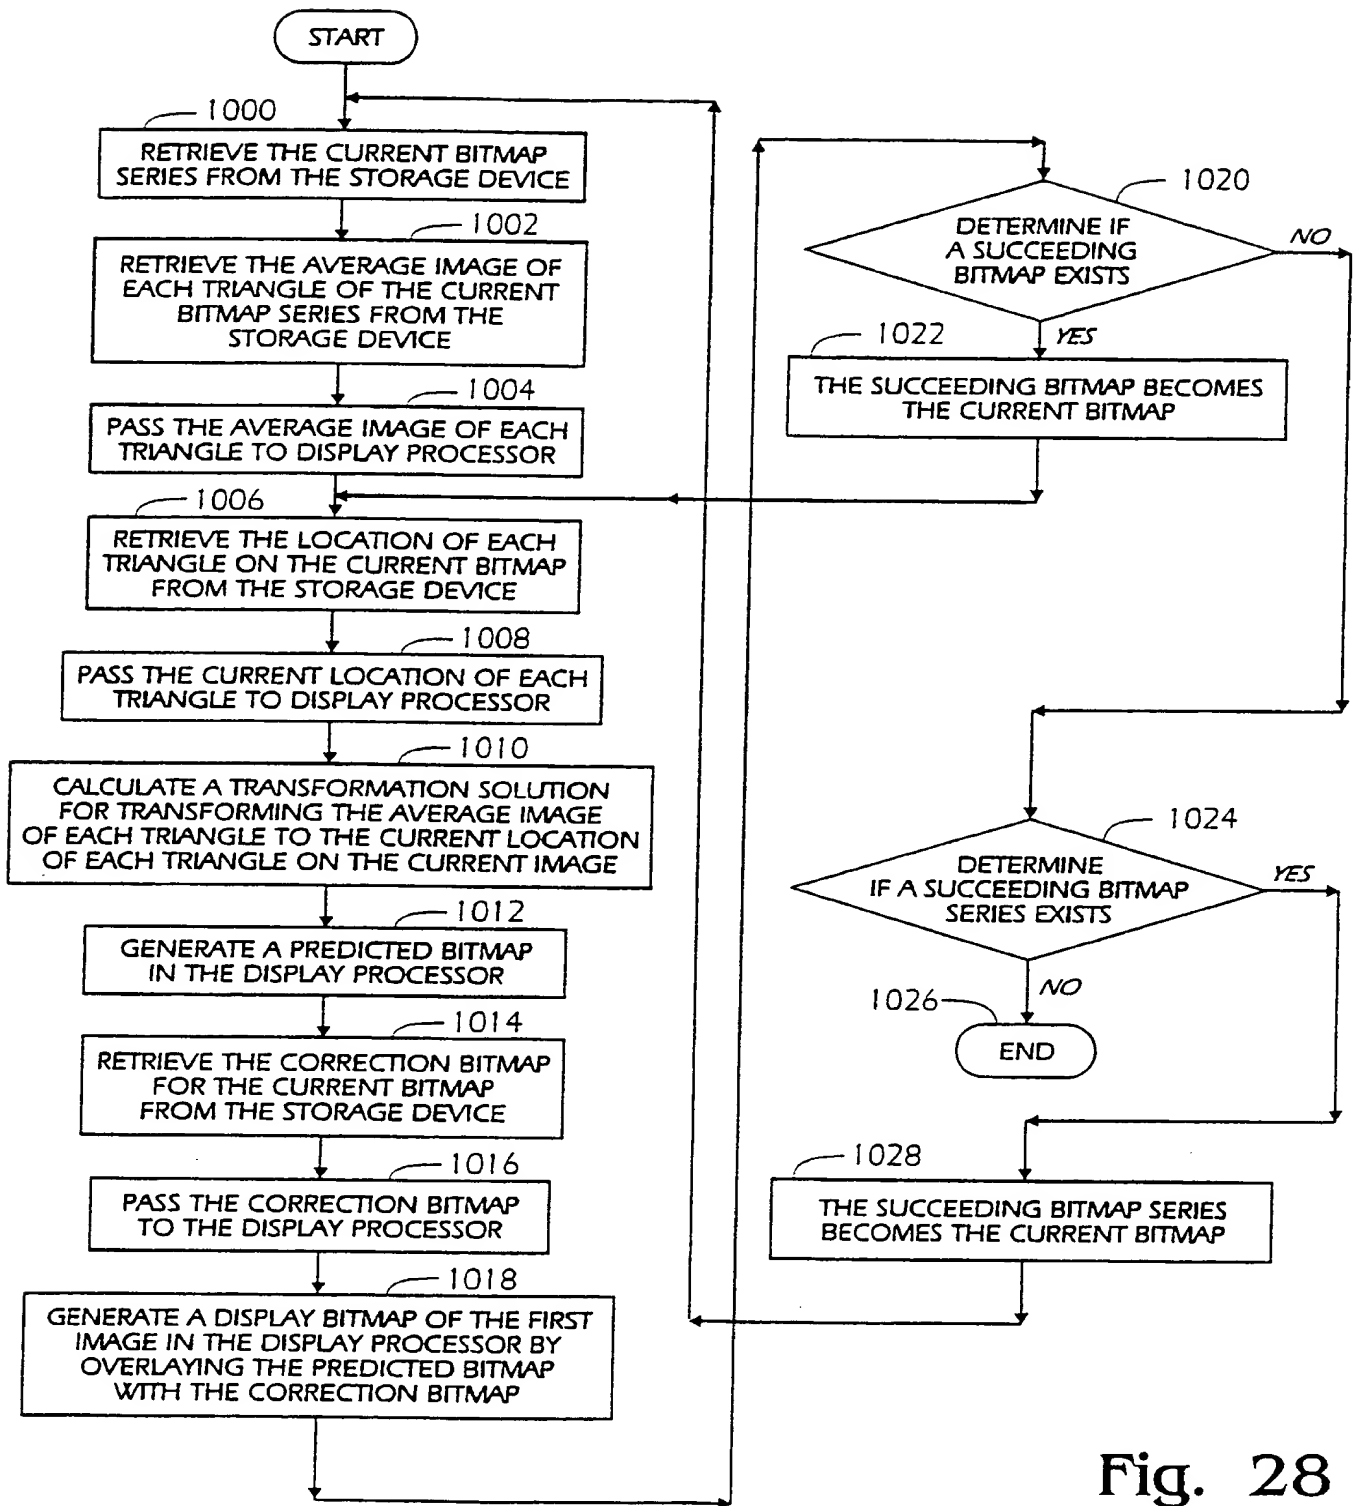


Fig. 28

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/15892

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/26 H04N7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 625 853 A (NIPPON TELEGRAPH AND TELEPHONE CORP.) 23 November 1994	1-3, 5-15, 17, 19, 21-27, 77
Y	see the whole document	4, 16, 18, 20
A	WO 91 11782 A (DAVID SARNOFF RESEARCH CENTER, INC.) 8 August 1991	1, 3, 19
Y	see the whole document	4, 20
A	EP 0 474 307 A (PHILIPS ELECTRONICS AND ASSOCIATED IND. LTD.) 11 March 1992	14
Y	see the whole document	16
A	US 5 117 287 A (KOIKE ET AL.) 26 May 1992	14
Y	see column 6 - column 8; figures 4, 6	18
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

21 April 1997

Date of mailing of the international search report

28.04.97

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Foglia, P

INTERNATIONAL SEARCH REPORT

 International Application No.
 PCT/US 96/15892

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	VISUAL COMMUNICATION AND IMAGE PROCESSING '91, vol. 1605, no. 1/2, 11 November 1991, BOSTON, MS, US, pages 570-581, XP000479265 SANSON: "Motion Affine Models Identification and Application to Television Image Coding"	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20

X	IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, vol. 4, no. 2, April 1994, NEW YORK US, pages 181-194, XP000489690 HÖTTER: "Optimization and Efficiency of an Object-Oriented Analysis-Synthesis Coder"	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20

X	IEEE TRANSACTIONS ON IMAGE PROCESSING, vol. 2, no. 4, October 1993, NEW YORK US, pages 481-498, XP000412063 ZAKHOR ET AL.: "Edge-Based 3-D Camera Motion Estimation with Application to Video Coding"	1-3, 5-15,17, 19, 21-27,77
A	see page 488, left-hand column, line 1 - line 15; figures 2-4	4,16,18, 20

X	EP 0 614 318 A (TOSHIBA KK) 7 September 1994	1-3, 5-15,17, 19, 21-27,77
A	see the whole document	4,16,18, 20

A	CVGIP IMAGE UNDERSTANDING, vol. 60, no. 2, September 1994, ORLANDO, FL, US, pages 119-140, XP000484198 MEYER ET AL.: "Region-Based Tracking Using Affine Motion Models in Long Image Sequences"	1-27,77

A	US 5 295 201 A (YOKOHAMA) 15 March 1994 see the whole document	1-27,77

-/--		

INTERNATIONAL SEARCH REPORT

Interr. Application No

PCT/US 96/15892

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 39, no. 3, August 1993, NEW YORK US, pages 141-150, XP000396273 NIEWEGLOWSKI ET AL.: "A Novel Video Coding Scheme Based on Temporal Prediction using Digital Image Warping" see the whole document ---	28-43
A	IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, vol. 3, no. 1, February 1993, NEW YORK US, pages 54-70, XP000334579 ORCHARD: "Predictive Motion-Field Segmentation for Image Sequence Coding" see the whole document ---	28-43
A	OPTICAL ENGINEERING, vol. 32, no. 7, July 1993, BELLINGHAM, WA, US, pages 1464-1474, XP000382627 SEFERIDIS ET AL.: "General Approach to Block-Matching Motion Estimation" see the whole document ---	28-43
A	EP 0 497 586 A (SONY CORP.) 5 August 1992 see the whole document ---	44-63
A	EP 0 395 293 A (BRITISH TELECOMMUNICATIONS PLC) 31 October 1990 see the whole document ---	44-63
X	PROCEEDINGS OF THE ACM MULTIMEDIA 93, 1 August 1993, ANAHEIM, CA, US, pages 83-90, XP002029826 CHANG ET AL.: "Transform Coding of Arbitrarily-Shaped Image Segments" see the whole document ---	64-76, 78-80
X	ICIP-94, vol. I/III, 13 November 1994, AUSTIN, TX, US, pages 85-89, XP002029827 CHEN ET AL.: "A Block Transform Coder for Arbitrarily Shaped Image Segments" see the whole document ---	64-76, 78-80
A	SIGNAL PROCESSING IV: THEORIES AND APPLICATIONS, September 1988, ELSEVIER, pages 1145-1148, XP002029828 FRANKE ET AL.: "Constrained Iterative Restoration Techniques: a Powerful Tool in Region Oriented Texture Coding" see the whole document -----	64-76, 78-80

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 96/ 15892

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

(see Annex)

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 96/ 15892

FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

1. Claims 1-27,77: Method of encoding/decoding of a video sequence using a motion transformation between arbitrary image features
2. Claims 28-63: Method for estimating motion between corresponding pixels in consecutive image frames
3. Claims 64-76,78-80: Method for transforming an arbitrarily shaped image region into a region of predetermined configuration

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/15892

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 625853 A	23-11-94	JP 7046595 A	14-02-95
		US 5598215 A	28-01-97
-----	-----	-----	-----
WO 9111782 A	08-08-91	EP 0513047 A	19-11-92
		JP 5503796 T	17-06-93
		US 5067014 A	19-11-91
-----	-----	-----	-----
EP 474307 A	11-03-92	JP 4281688 A	07-10-92
		US 5280530 A	18-01-94
-----	-----	-----	-----
US 5117287 A	26-05-92	JP 3253190 A	12-11-91
		JP 8002107 B	10-01-96
-----	-----	-----	-----
EP 614318 A	07-09-94	JP 7067111 A	10-03-95
		JP 7170523 A	04-07-95
		US 5592228 A	07-01-97
-----	-----	-----	-----
US 5295201 A	15-03-94	JP 5199510 A	06-08-93
		CA 2087802 A	22-07-93
-----	-----	-----	-----
EP 497586 A	05-08-92	JP 4245386 A	01-09-92
		JP 4248683 A	04-09-92
		JP 4261288 A	17-09-92
		US 5586202 A	17-12-96
-----	-----	-----	-----
EP 395293 A	31-10-90	AU 626120 B	23-07-92
		AU 5422390 A	16-11-90
		CA 2053241 A	27-10-90
		WO 9013205 A	01-11-90
		JP 4506889 T	26-11-92
		US 5206723 A	27-04-93
-----	-----	-----	-----

THIS PAGE BLANK (USPTO)